


516 Parallel Cable Connector – LPC516



- Cable splice with positive single bolt tension grip on cable or wire
- For use with all full size cables on Class I/II structures
- Listed to UL® 96

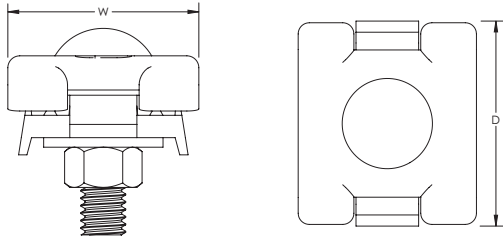

Part Number	LPC516
Conductor Size, UL	Class 1 - Class 2 (4/0 Max)
Material	Copper
Finish	Bare
Depth (D)	1.84"
Width (W)	1 1/2"
Unit Weight	0.4 lb
Certifications	UL
Standard Packaging Quantity	1 pc
UPC	78285644856
EAN-13	8711893099126

UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

Pentair products shall be installed and used only as indicated in Pentair's product instruction sheets and training materials. Instruction sheets are available at erico.pentair.com and from your Pentair customer service representative. Improper installation, misuse, misapplication or other failure to completely follow Pentair's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2017 Pentair. All rights reserved.

Pentair, CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH and LENTON are owned by Pentair or its global affiliates.

All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.