


M-12578


2

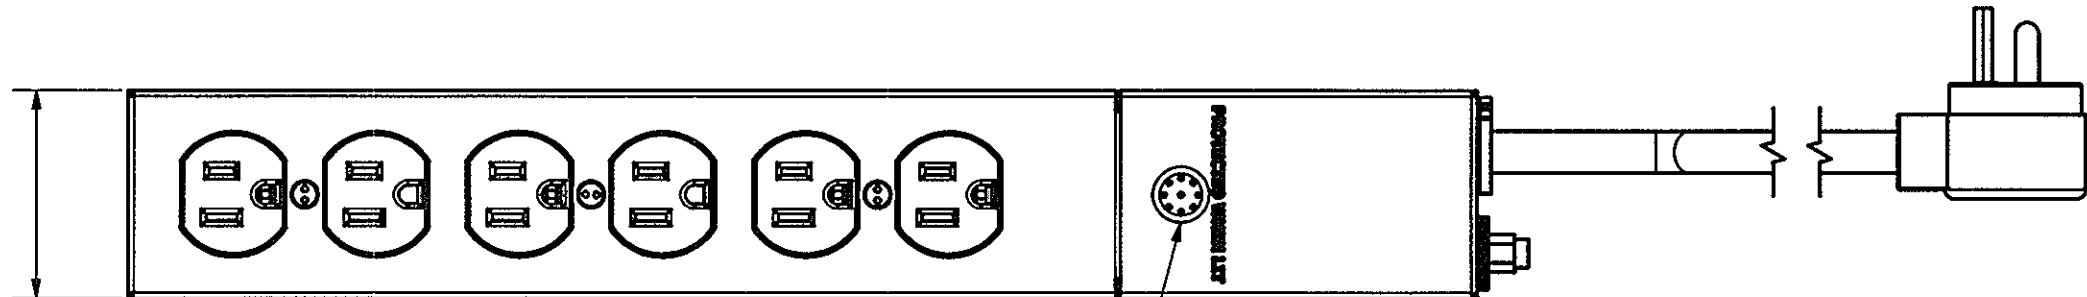

2.22 [56.4]

INDICATOR LED - PROTECTED WHEN LIT

POWER CORD WITH MOLDED HOSPITAL GRADE PLUG

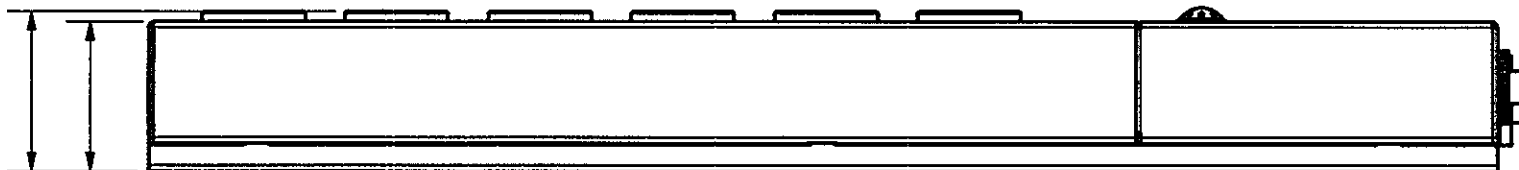


1.60 [40.5]

1.70 [43.3]

NOTE: HBL6SS6 SHOWN.

CIRCUIT BREAKER / RESET SWITCH

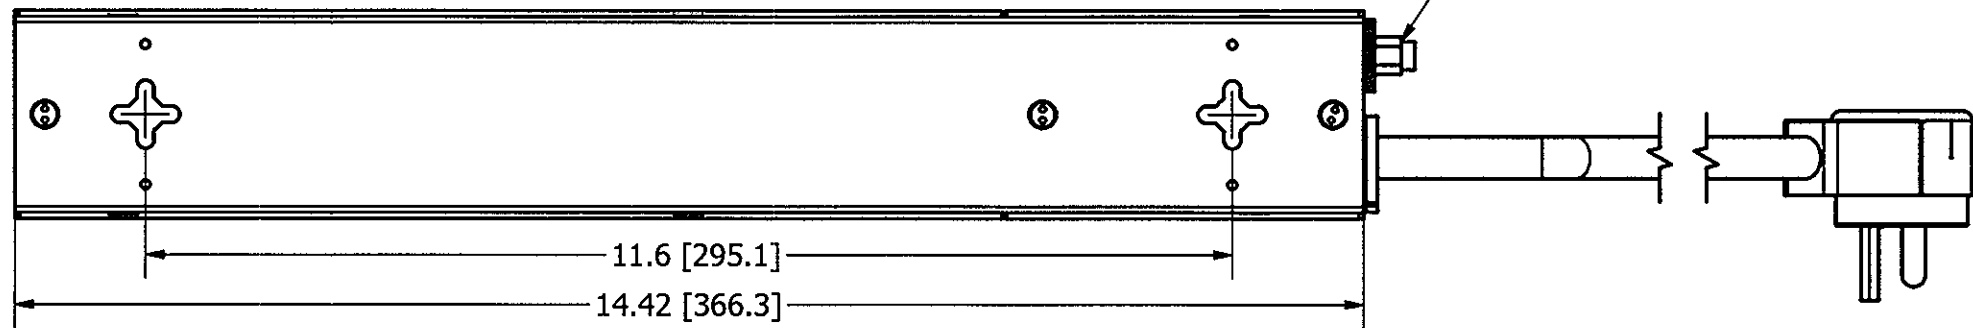

11.6 [295.1]

14.42 [366.3]

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	GALV. STEEL	WHITE POWDERCOAT
MAIN ENCLOSURE	GALV. STEEL	WHITE POWDERCOAT
CIRCUIT HOUSING	GALV. STEEL	WHITE POWDERCOAT
POWER CORD	THERMOPLASTIC	WHITE
SCREWS	STEEL	ZINC
DUPLEX RECEPTACLES	THERMOPLASTIC	WHITE
CIRCUIT BREAKER	THERMOPLASTIC	BLACK

DIMENSION SHEET FOR QTY. NO. SEE TABLE

REPAIRABLE

NON-REPAIRABLE

2	POWER CORD DESCRIPTION UPDATED. PER DCN# 22263 EMD.	EMD	7/7/2016
1	RELEASED PER DCN# 20544	EMD	5/20/14
SYM	DESCRIPTION	APPRO	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

CATALOG#	DESCRIPTION	CORD LENGTH	RATING
HBL6SS6	SURGE STRIP WITH 15A DUPLEX RECEPTACLES	6 FT	15A 125V
HBL6SS15	SURGE STRIP WITH 15A DUPLEX RECEPTACLES	15 FT	15A 125V
HBL6SS620	SURGE STRIP WITH 20A DUPLEX RECEPTACLES	6 FT	20A 125V
HBL6SS1520	SURGE STRIP WITH 20A DUPLEX RECEPTACLES	15 FT	20A 125V
HBL6HG6	SURGE STRIP WITH 15A HOSPITAL GRADE RECEPTACLES	6 FT	15A 125V
HBL6HG15	SURGE STRIP WITH 15A HOSPITAL GRADE RECEPTACLES	15 FT	15A 125V
HBL6HG620	SURGE STRIP WITH 20A HOSPITAL GRADE RECEPTACLES	6 FT	20A 125V
HBL6HG1520	SURGE STRIP WITH 20A HOSPITAL GRADE RECEPTACLES	15 FT	20A 125V

TITLE  
GENERAL PURPOSE SURGE STRIP

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ±1/64 DECIMALS ±.005 ANGLES ±2°	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT	
	DR. BY EMD	APP. BY
	TR. BY EMD	SCALE
	CHK'D BY	DATE 5/6/2014

CODE 74545

B

M-12578

2