

# Rittal – The System.

Faster – better – everywhere.

## **Shallow air duct system for roof-mounted cooling units and roof-mounted air/water heat exchangers – SK 3286.850**

Date : May 24, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Shallow air duct system for roof-mounted cooling units and roof-mounted air/water heat exchangers – SK 3286.850

created: 24.05.2018 build on [www.rittal.com/us-en](http://www.rittal.com/us-en)

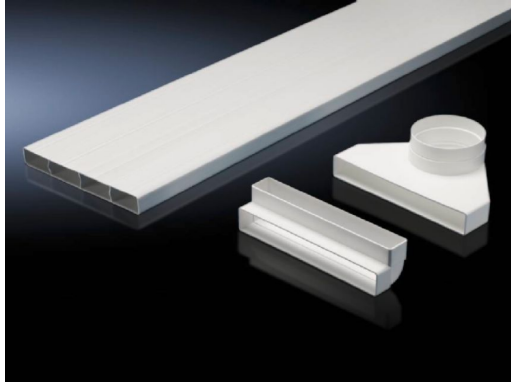

## Product description

**Description:** Cold air can be routed directly to specific areas of the enclosure using the air duct system. This eliminates the risk of air short circuits due to self-ventilated installed devices. The dimensions of the shallow duct are W x H x D 229 x 1500 x 29 mm, and can be shortened to the required length.

**Applications:** Suitable for TS 8 enclosures with widths of 800 mm or more and depths of 600 mm or more.

**Material:** Flame-resistant plastic to DIN 4102/B1

**Color:** RAL 7035

**Mounting tip:** The air duct adapter 3286.840 is required for installation with devices 3359.XXX and 3382.XXX

**Supply includes:**  
Flat duct  
Adaptor  
Compensating piece  
Deflector, 90°

**Note:** Do not direct cold air straight at active components.  
When using the ducting system, the performance of the cooling unit may be reduced, depending on the application in question.  
Cannot be used in conjunction with quick-change frames.

**Suitable for Model No.:**  
3209....  
3210....  
3273....  
3383....  
3384....

3385....  
3359....  
3382....

Product features	
Packaging unit:	1 pc(s).
Weight/packaging unit:	3.5 kg (7.7 lb.)
EAN:	4028177557055
Customs tariff number:	39269097
ETIM 6.0:	EC001292
ETIM 5.0:	EC001292
eCl@ss 8.0/8.1:	22410601
eCl@ss 7.0/7.1:	27189269
eCl@ss 6.0/6.1:	27189269
eCl@ss 5.1/5.1.4:	27180792
Product description (long):	SK Air duct system Flat, for SK 3209/3210/3273/3383/3384/3385/3359/3382, WHD: 229 x 1500 x 29 mm