


## Hubs and Bulkhead Fittings

### T&B® Grounding Hub

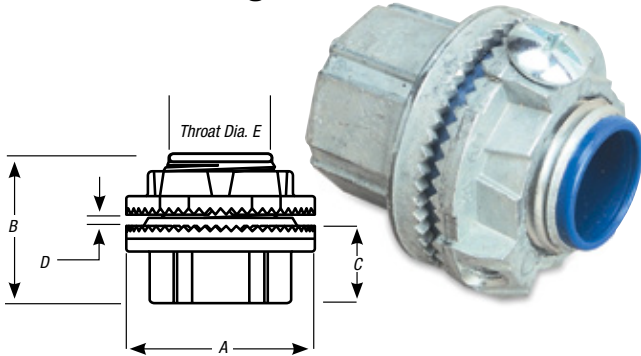

#### T&B Hub Centerline Spacing Chart

CONDUIT TRADE SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	5"	6"
1/2"	1 1/16"											
3/4"	1 43/64"	1 25/32"										
1"	1 27/32"	1 5/16"	2 1/8"									
1 1/4"	2 1/32"	2 3/16"	2 1/2"	2 1/2"								
1 1/2"	2 1/32"	2 5/16"	2 1/2"	2 11/16"	2 1/2"							
2"	2 15/32"	2 37/64"	2 3/4"	2 15/16"	3 1/8"	3 3/8"						
2 1/2"	2 23/32"	2 53/64"	3"	3 1/16"	3 3/8"	3 3/8"	3 3/8"					
3"	3 1/32"	3 3/64"	3 3/16"	3 1/2"	3 11/16"	3 15/16"	4 1/16"	4 1/2"				
3 1/2"	3 11/32"	3 31/64"	3 3/8"	3 13/16"	4"	4 1/4"	4 1/2"	4 13/16"	5 1/8"			
4"	3 9/32"	3 45/64"	3 3/8"	4 1/16"	4 1/4"	4 1/2"	4 3/4"	5 1/16"	5 3/8"	5 3/8"		
5"	4 3/32"	3 25/64"	4 1/16"	4 3/4"	4 15/16"	5 1/16"	5 1/8"	5 3/4"	6 1/16"	6 3/16"	7"	
6"	4 11/16"	4 5/64"	4 31/32"	5 5/32"	5 11/32"	5 13/32"	5 27/32"	6 5/32"	6 15/32"	6 23/32"	7 13/32"	7 13/16"
Nearest Obstruction to Center of Hub	2 7/32"	6 1/64"	1 1/8"	1 5/16"	1 1/2"	1 3/4"	2"	2 3/16"	2 5/8"	2 7/8"	2 15/16"	3 1/32"

CAT. NO.	TRADE SIZE	MAX. PANEL THICKNESS					THROAT DIA.
		A	B	C	D	E	
H050GR-TB	1/2	1 1/16"	1 1/16"	7/8"	3/16"	1 19/32"	
H075GR-TB	3/4	1 1/16"	1 19/32"	2 9/32"	3/16"	2 25/32"	
H100GR-TB	1	2"	1 13/16"	1 1/16"	1/4"	1"	
H125GR-TB	1 1/4	2 3/4"	1 1/8"	1 1/16"	1/4"	1 1/16"	
H150GR-TB	1 1/2	2 3/4"	1 1/8"	1 1/16"	1/4"	1 11/32"	
H200GR-TB	2	3 1/4"	1 15/16"	1 1/32"	1/4"	1 31/32"	
H250GR-TB	2 1/2	3 3/4"	2 1/16"	1 1/16"	1/4"	2 13/32"	
H300GR-TB	3	4 3/8"	2 1/16"	1 19/32"	1/4"	2 21/32"	
H350GR-TB	3 1/2	5"	2 23/32"	1 1/8"	1/4"	3 13/32"	
H400GR-TB	4	5 1/2"	2 23/32"	1 1/8"	1/4"	3 3/8"	
H500GR-TB	5	6 7/8"	3 3/32"	1 5/16"	1/4"	4 15/16"	
H600GR-TB	6	7 11/16"	3 5/32"	2"	5/16"	6"	

Material – Hub and Locknut: Zinc or copper-free aluminum  
 Insulating Throat: Thermoplastic temp. rating – 105° C  
 Flammability Rating – 94V-0  
 Sealing Ring: Nitrile (BUNA "N")

For Aluminum Hubs, add suffix A (i.e., H050A). For Chrome-Plated Hubs, add suffix CP (i.e., H050CP). For 316 Stainless Steel Hubs, add suffix GRSST (i.e., H050GRSST). (1/2" through 2" only.) Meets NEMA sealing requirements for NEMA 3R, 4 & 13 enclosures.

UL Listed and CSA Certified. CSA Certified for hazardous locations Class II and Class III locations.


UL File No. E-23018  
 CSA File No. 4484

Chrome-Plated Hubs (suffix-"CP") are rated NEMA 4X.

### T&B® Grounding and Bonding Locknut



Grounding Locknut for Hubs



CAT. NO.	TRADE SIZE	DIA.	HEIGHT	GROUND SCREW	MAX. CONDUCTOR SIZE
L050GR-TB	1/2	1 1/2"	1 3/32"	#10-32 x 1/4"	#10
L075GR-TB	3/4	1 11/16"	1 3/32"	#10-32 x 1/4"	#10
L100GR-TB	1	2"	1 3/32"	#10-32 x 1/4"	#10
L125GR-TB	1 1/4	2 3/8"	1 5/32"	1/4-20 x 1/4"	#10
L150GR-TB	1 1/2	2 3/4"	1 5/32"	1/4-20 x 3/16"	#8
L200GR-TB	2	3 1/4"	1 5/32"	1/4-20 x 3/16"	#8
L250GR-TB	2 1/2	3 3/4"	1 11/16"	1/4-20 x 5/16"	#6
L300GR-TB	3	4 3/8"	2 3/32"	1/4-20 x 5/16"	#6
L350GR-TB	3 1/2	5"	2 3/32"	1/4-20 x 5/16"	#6
L400GR-TB	4	5 1/2"	2 3/32"	1/4-20 x 5/16"	#4
L500GR-TB	5	6 7/8"	2 3/32"	3/8-16 x 3/8"	#2
L600GR-TB	6	7 11/16"	2 3/32"	3/8-16 x 3/8"	#1

Material – Locknut: Zinc or copper-free aluminum UL File No. E-3060

For Aluminum Locknuts, add suffix A. (i.e., L050GRA). CSA File No. 4484

For Chrome-Plated Locknuts, add suffix CP. (i.e., L050CP). For 316 Stainless Steel Locknuts, add suffix SST (1/2" through 2" only.) For Locknut with Lay In Lug, add suffix GRL.