

3P

Arktite® CSR Series Non-metallic Interlocked Receptacles Fused and Non-fused

30, 60 and 100 Amp
Enclosure Type 3, 4, 4X, 12
IP66
UL and cUL Listed

Watertight
Corrosion-Resistant

CSR Series Compact Interlocked Arktite® Receptacles

Eaton's Crouse-Hinds interlocked receptacles prevent engagement and disengagement of the plug under load, providing safe portable connections and extended product life.

Arktite Compact Interlocked Receptacles are Used:

- To supply power to portable or fixed electrical equipment such as welders, compressors, conveyors, portable tools, lighting systems and similar equipment.
- In damp or corrosive locations.
- In wet locations.
- In hosesdown areas.

Threaded front cap ensures watertight rating while plug is not engaged

Locking ring on the APJ/NPJ Arktite plug threads onto the receptacle, providing positive, worry free power engagement and a watertight environmental seal

Field proven direct drive interlock provides positive locking action every time


Corro-free™ epoxy powder coated receptacle for even greater outdoor weatherability

Self-wiping, naval brass contacts in receptacle assure reliable performance and long dependable life

Innovative cover break line provides easy wiring access

Large rotary handle is easy to operate even with gloved hands

Corrosion, impact resistant enclosure offers Enclosure Type 4X, watertight, IP66 rating

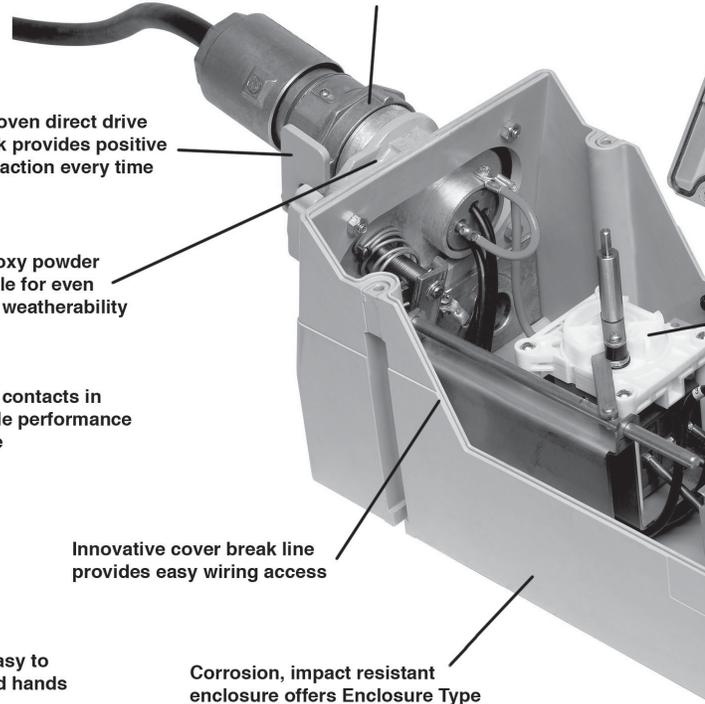

Additional Features and Benefits:

- Enclosure Type 4X, watertight, IP66.
- Compact enclosure is designed to fit into the web of an I-beam.
- Heavy duty Arktite® receptacle is compatible with existing Eaton's Crouse-Hinds Arktite® plugs of same rating and configuration.
- Eaton's Bussmann CubeFuse™ with Indicator – the world's first "finger-safe" industrial power fuse.
- Front mounted handle permits the interlocked receptacles to be easily mounted side by side or in tight spots.
- Molded-in-place mounting feet require only four screws to mount the entire unit.
- UL and cUL Listed.

Ordering Information: 600 VAC

Amps	Configuration	Hub Size	Fusing	Cat. #	Mating Cat. #
30	3W, 4P	1"	Fused	CSR3352	APJ3485/NPJ3484
30	3W, 4P	1"	Non-fused	CSR33542	APJ3485/NPJ3484
60	3W, 4P	1 1/4"	Fused	CSR6352	APJ6485/NPJ6484
60	3W, 4P	1 1/4"	Non-fused	CSR63542	APJ6485/NPJ6484

Crouse-Hinds
by **E.T.M.**


Arktite® CSR Series Non-metallic Interlocked Receptacles

Fused and Non-fused

30, 60 and 100 Amp
Enclosure Type 3, 4, 4X, 12
IP66
UL and cUL Listed

Watertight
Corrosion-Resistant

3P

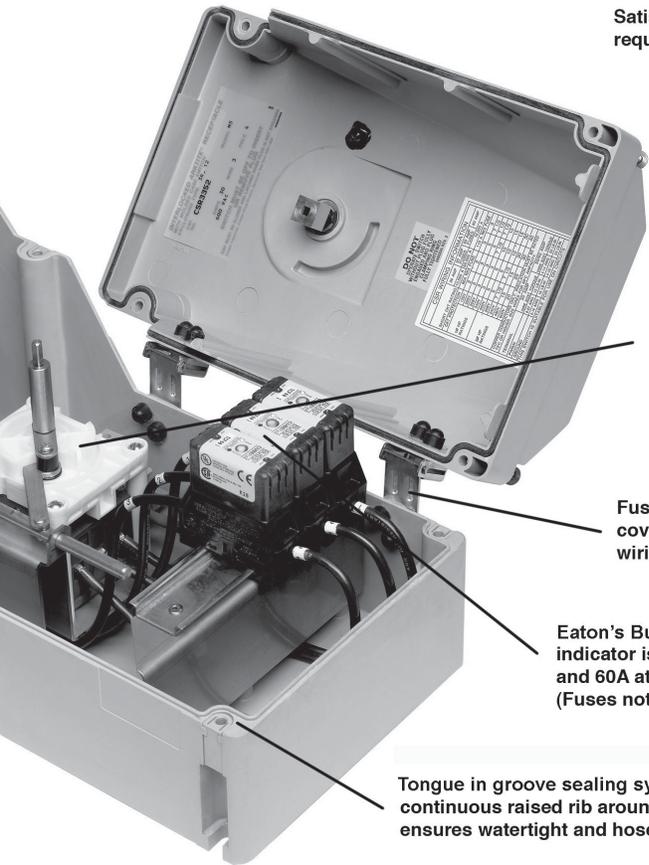


Satisfies OSHA lockout / tagout requirements

H.P. rated enclosed switch for motor load applications

Fused CSR offers a hinged cover for easy access when wiring or replacing fuses.

Eaton's Bussmann CubeFuse™ with indicator is fully rated for 30A and 60A at 600VAC. (Fuses not included.)

Tongue in groove sealing system with continuous raised rib around enclosure ensures watertight and hosedown ratings



Fully rated for 30A and 60A at 600 VAC. For use with Eaton's Bussmann CubeFuse. Fuses not included.



Plug locks into receptacle, providing positive, worry-free power engagement as well as watertight protection.



Complies with OSHA lockout / tagout requirements.

Certifications and Compliances:

- UL Listed – (UL Standards 508, 1682)
- cUL Listed (Certified by UL to CSA Standards C22.2 Nos. 14, 182.1)
- Enclosure Type 3, 4, 4X, 12
- IP66 Enclosure

Standard Materials:

- Enclosure – fiber reinforced polyester
- Hardware – stainless steel
- Receptacle Housing – aluminum
- Power Contacts – naval brass
- Interlock Mechanism – stainless steel
- Zinc Hubs – NEMA 4X

Standard Finishes:

- Aluminum – Corro-free™ epoxy powder
- Brass – natural
- Stainless Steel – natural

Options:

Description	Suffix
• Factory Installed Auxiliary Contacts.....	S483
• Rotated Interior (22½° to right).....	S4


Horsepower Ratings:

Amps	250 VAC	480 VAC	600 VAC
30	10 HP	20 HP	25 HP
60	20 HP	40 HP	40 HP

Crouse-Hinds

by **E.T.N**

3P



Heavy-duty, epoxy coated cast aluminum receptacle with stainless steel interlocking mechanism for superior durability and corrosion resistance.


3P

Arktite® CSR Series Non-metallic Interlocked Receptacles Fused and Non-fused

30, 60 and 100 Amp
Enclosure Type 3, 4, 4X, 12
IP66
UL and cUL Listed

Watertight
Corrosion-Resistant

Dimensions In Inches:

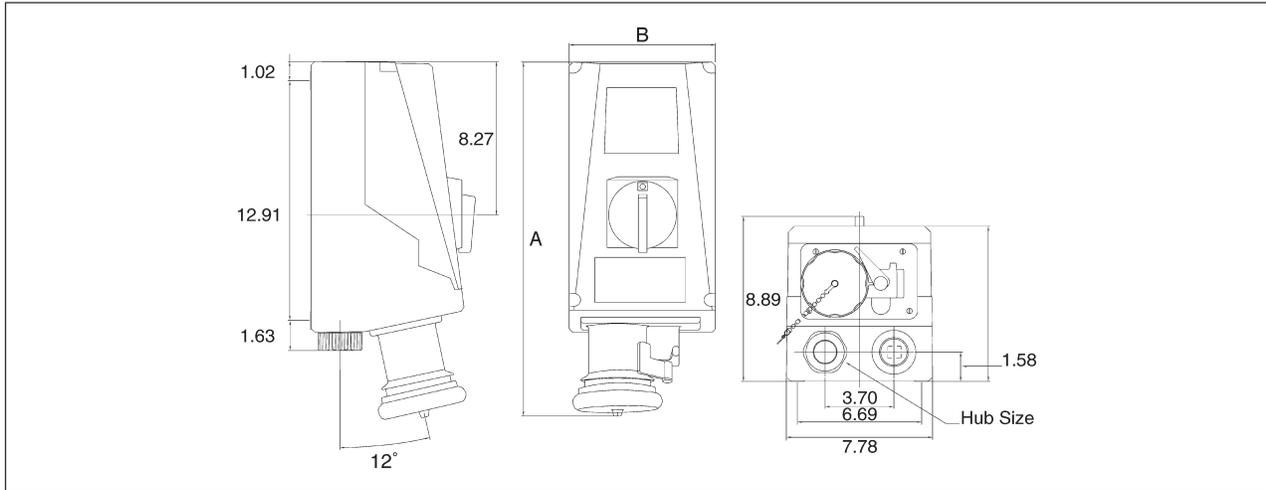

Amps	Style	Dimension A	Dimension B	Hub Size
30	Fused	18.26	8.00	1"
30	Non-fused	18.26	7.87	1"
60	Fused	19.26	8.00	1 1/4"
60	Non-fused	19.26	7.87	1 1/4"

3P