


M-2444 3

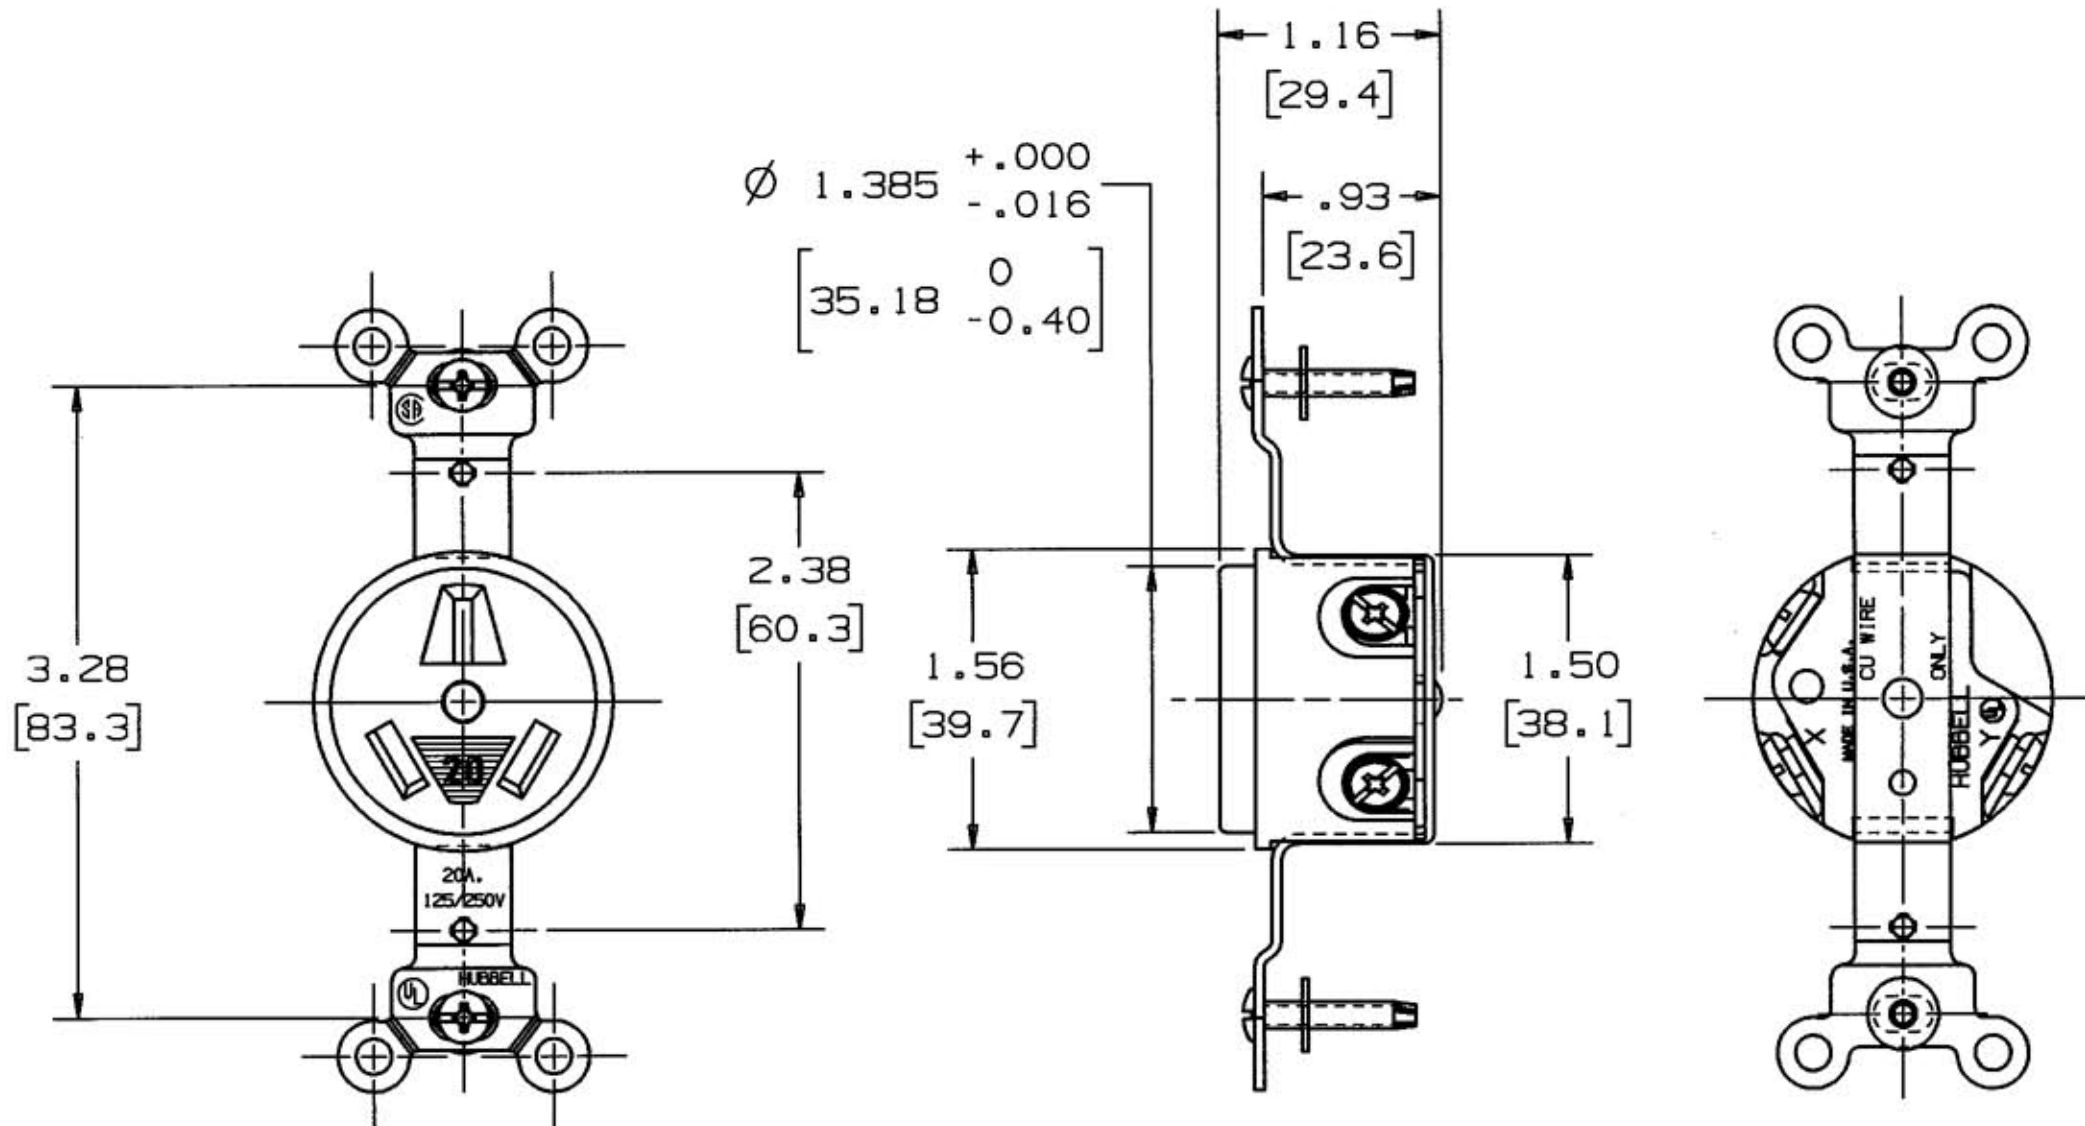

NOTES: (UNLESS OTHERWISE SPECIFIED)

1) DIMENSION FORMAT IS: INCHES
[mm]

2) DIMENSIONS SHOWN ON THIS DRAWING ARE NOMINAL VALUES FOR GENERAL USE ONLY. ACTUAL PART TOLERANCES MUST BE OBTAINED FROM HUBBELL ENGINEERING.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BODY	PHENOLIC	BLACK
CONTACT SPR BIND'G PLATES	.031 BRONZE	
NEUTRAL BINDING PLATE	.040 BRASS	WHITE
NEUTRAL CONTACT SPRING	.040 PHOS. BRZE	
BINDING SCREWS	BRASS	1- WHITE
BRIDGE	.050 C.R.S.	ZINC PLATE
INSULATOR	PHENOLIC	
RIVET	BRASS	
WASHER	.031 FIBER	
FLAT HD. MOUNTING SCREWS	STEEL	

SUPERSEDES DRAWING
DATED 8-16-65

3 REDRAWN ON CAD WITH CHANGES; TCM 8/22/01
DECIMAL DIMENSIONS WERE
FRACTIONAL ADDED DUAL
DIMENSIONING; ADDED NOTES
1 & 2 PER DCN #8682.
JMN TCM *TCM*

SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
SINGLE RECEPTACLE
20AMP 125/250V, 3-WIRE
NEMA 10-20R

TOLERANCES UNLESS
OTHERWISE SPECIFIED

FRACTIONS $\pm 1/64$
DECIMALS $\pm .005$
ANGLES $\pm 2^\circ$

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY ASM	APP. BY AS
TR. BY JMN	SCALE 1:1
CHK'D BY JCH	DATE 8/22/01