

Midget Twist-Lock® Devices
15A, 125/250V AC, 3 Pole, 3 Wire
Non-Grounding
Flanged Receptacle

Features

- Stainless Steel mounting flange
- High heat resistant phenolic base

Ordering Information

Description	Terminals	UPC	Catalog Number
Stainless steel flanged receptacle, accepts cord .500" (12.7) in dia.	Covered	783585237480	HBL7489

Listings

Listed to UL 498
Certified to CSA C22.2 No.42


Specifications

Flange	Stainless Steel
Base	Phenolic
Contacts	Brass
Terminal Screws	#5-40 Brass

Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
Mechanical	
Terminal Accommodation	#18 AWG - #14 AWG solid or stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498
Environmental	
Flammability	HB or better per UL94/CSA 22.2 No.0.17
Moisture Resistance	IP20 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

HUBBELL

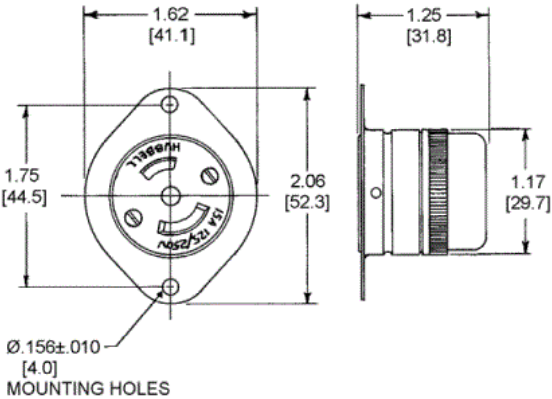

Accessories

Valise® Plug	HBL7485V
Plug	HBL7485
Angled Plug	HBL7432

Resources

Customer Use Drawing
eCatalog

