M-9134 1

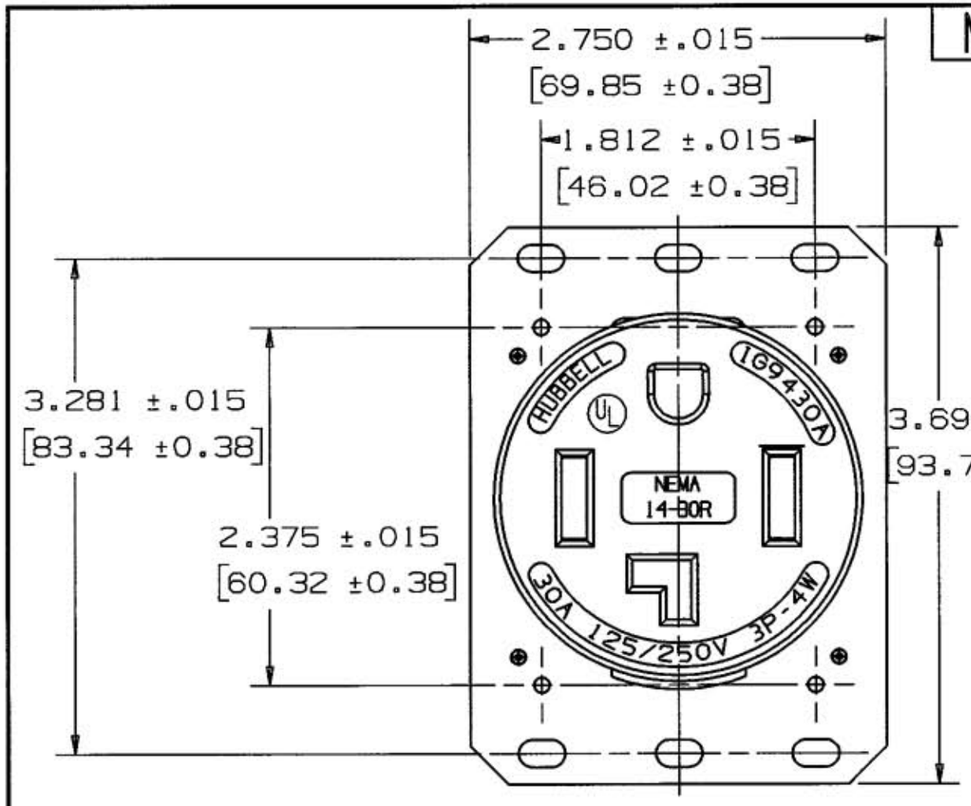

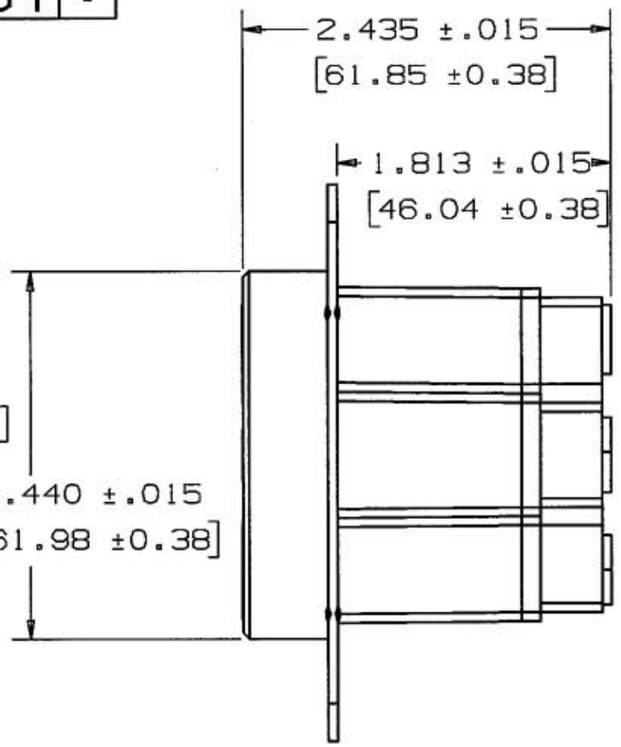

NOTES: UNLESS OTHERWISE SPECIFIED:

1. BOX TERMINAL WILL ACCEPT #12 THRU #4 CONDUCTOR SIZE.
2. TERMINAL SCREWS ARE 3/16" ALLEN HEAD.
3. MOUNTS TO 2-1/8" DEEP TWO GANG BOX.
4. DIMENSION FORMAT IS: INCHES(mm).

CAT NO.	CONFIGURATION	RATING	WIRE	CSA	U.L.	FED.SPEC.
IG9430A	NEMA 14-30R	30A-125/250V	3P-4W	NO	YES	NO
IG9450A	NEMA 14-50R	50A-125/250V	3P-4W	NO	YES	NO
IG9460A	NEMA 14-60R	60A-125/250V	3P-4W	NO	YES	YES
IG8430A	NEMA 15-30R	30A-3PH/250V	3P-4W	NO	YES	NO
IG8450A	NEMA 15-50R	50A-3PH/250V	3P-4W	NO	YES	YES
IG8460A	NEMA 15-60R	60A-3PH/250V	3P-4W	NO	YES	YES

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	POLYESTER	
BACK COVER	POLYESTER	
MOUNTING PLATE	.062 C.R.S.	ZINC PL.
CONTACTS	BRASS	
GROUND SHUNT	BRASS	
TERMINAL SCREW	STEEL	ZINC PL.
BOX TERMINAL	COPPER	

DIMENSION SHEET FOR CAT. NO.

REPAIRABLE ☐

NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
1	PRODUCTION RELEASE PER DCN 11118 CAC	CAC	8/11/03

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
RECEPTACLE STRAIGHT BLADE
(IG) 30A, 50A, 60A

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY CAC	APP. BY
TR. BY	SCALE 1:1
CHK'D BY	DATE 6/26/03

B M-9134 1