

## RCM+ Rack Mounted Horizontal Cable Manager With Cover Single Sided, Plastic Finger Style


- Used to provide horizontal pathway for cabling on one side of a two-post rack
- #12-24 mounting hardware is included
- Plastic cable manager fingers help control bend radius
- Snap-on removable hinged door opens past 180°, and remains open in up position for convenient cable access
- Stylized door that complements the look of the RCM and RCM+ vertical managers
- Open back design allows for free movement of cables from the front to the back of the cable manager
- Standard finger versions are fully compatible with the RCM vertical cable managers for enhanced cable capacity
- Extended finger versions are fully compatible with the RCM+ vertical cable managers
  - SX series managers offer extended length fingers which provide 45% more cable capacity than standard fingers
- UL Listed as a Communication Circuit Accessory. File No. E171936
- Material: Steel - 14 ga. (ASTM A569) with UL 94V-0 black plastic components
- Finishes\_\_\_: Flat Black Powder Coat (FB), Silver Powder Coat (SL), or Eaton White (EW)



**SB87019S2FB**  
Standard Length  
(2U)



**SB87019SX2FB**  
Extended Length  
(2U)



IH = Inner Height  
ID = Inner Depth

Catalog Number	Height	Inner Height In. (mm)	Width In. (mm)	Inner Depth In. (mm)	Weight Each Lbs. (kg)	Max CAT 6A Cables 0.25" OD (50% Fill)
<b>✓ Standard Fingers (for use with RCM Vertical Managers)</b>						
<b>SB87019S1</b> ___	1U	0.7" (18)	19" (482)	5.5" (140)	2.1 (0.9)	39
<b>✓ SB87023S1</b> ___	1U	0.7" (18)	23" (584)	5.5" (140)	2.3 (1.0)	39
<b>SB87019S2</b> ___	2U	2.4" (61)	19" (482)	5.5" (140)	2.5 (1.1)	134
<b>✓ SB87023S2</b> ___	2U	2.4" (61)	23" (584)	5.5" (140)	2.7 (1.2)	134
<b>SB87019S3</b> ___	3U	4.2" (106)	19" (482)	5.5" (140)	2.8 (1.3)	235
<b>SB87023S3</b> ___	3U	4.2" (106)	23" (584)	5.5" (140)	3.1 (1.4)	235
<b>SB87019S4</b> ___	4U	5.9" (150)	19" (482)	5.5" (140)	3.2 (1.4)	330
<b>SB87023S4</b> ___	4U	5.9" (150)	23" (584)	5.5" (140)	3.6 (1.6)	330
<b>Extended Fingers (for use with RCM+ High Density Vertical Managers)</b>						
<b>SB87019SX1</b> ___	1U	0.7" (18)	19" (482)	8.0" (203)	2.4 (1.1)	57
<b>SB87019SX2</b> ___	2U	2.4" (61)	19" (482)	8.0" (203)	3.1 (1.4)	195
<b>SB87019SX3</b> ___	3U	4.2" (106)	19" (482)	8.0" (203)	3.8 (1.7)	342
<b>SB87019SX4</b> ___	4U	5.9" (150)	19" (482)	8.0" (203)	4.4 (2.0)	480

✓ FB is a popular item

## RCM+ Rack Mounted Horizontal Cable Manager With Cover Double Sided, Plastic Finger Style


- Used to provide a horizontal pathway for cabling on both sides of a two-post rack in the same RMU spacing
- #12-24 mounting hardware is included
- Plastic cable manager fingers help control bend radius
- Snap-on, removable, hinged aluminum doors that open past 180° and remain open in the up position for convenient cable access
- Stylized door that complements the look of the RCM and RCM+ vertical managers
- Open back design allows for free movement of cables from the front to the back of the cable manager
- Standard finger versions are fully compatible with the RCM vertical cable managers for enhanced cable capacity
- Extended finger versions are fully compatible with the new RCM+ vertical cable managers
  - DX series managers offer extended length fingers which provide 45% more cable capacity than standard fingers
- Low-profile rear-design provides easy cabling access to the back-side of patch panels
- Material: Steel - 14 ga. (ASTM A569) with UL 94V-0 black plastic components
- Finishes\_\_\_: Flat Black Powder Coat (FB), Silver Powder Coat (SL), or Eaton White (EW)



**SB87019D1FB** Standard (2U) Length



**SB87019D2FB** Standard (2U) Length

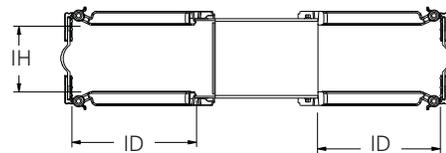

IH = Inner Height  
ID = Inner Depth

Catalog Number	Height	Inner Height In. (mm)	Width In. (mm)	Inner Depth In. (mm)	Weight Each Lbs. (kg)	Max CAT 6A Cables 0.25" OD (50% Fill)
<b>Standard Fingers (for use with RCM Vertical Managers)</b>						
<b>SB87019D1</b> ___	1U	0.7" (18)	19" (482)	5.5" (140)	2.9 (1.3)	78
<b>SB87023D1</b> ___	1U	0.7" (18)	23" (584)	5.5" (140)	3.3 (1.5)	78
<b>SB87019D2</b> ___	2U	2.4" (61)	19" (482)	5.5" (140)	3.7 (1.7)	268
<b>SB87023D2</b> ___	2U	2.4" (61)	23" (584)	5.5" (140)	4.1 (1.8)	268
<b>SB87019D3</b> ___	3U	4.2" (106)	19" (482)	5.5" (140)	4.5 (2.0)	470
<b>SB87023D3</b> ___	3U	4.2" (106)	23" (584)	5.5" (140)	4.9 (2.2)	470
<b>Extended Fingers (for use with RCM+ High Density Vertical Managers)</b>						
<b>SB87019DX1</b> ___	1U	0.7" (18)	19" (482)	8.0" (203)	3.1 (1.4)	114
<b>SB87019DX2</b> ___	2U	2.4" (61)	19" (482)	8.0" (203)	3.9 (1.7)	390
<b>SB87019DX3</b> ___	3U	4.2" (106)	19" (482)	8.0" (203)	4.7 (2.1)	684