



T5 Standard

F14T5/830/ALTO 40PK

Philips T5 Fluorescent Lamps featuring ALTO® Lamp Technology offer increased energy savings and low toxicity in a slim profile.

Product data

General Information		LLMF 6000 h Rated		94 %	
Cap-Base	G5 [G5]	LLMF 8000 h Rated		93 %	
Life to 50% Failures Preheat (Nom)	24000 h	LLMF 12000 h Rated		92 %	
Features	HE Alto® [High Efficiency Alto]	LLMF 16000 h Rated		91 %	
System Description	High Efficiency	LLMF 20000 h Rated		90 %	
LSF Preheat 2000 h Rated	99 %	Operating and Electrical			
LSF Preheat 4000 h Rated	99 %	Power (Rated) (Nom)		14.0 W	
LSF Preheat 6000 h Rated	99 %	Lamp Current (Nom)		0.165 A	
LSF Preheat 8000 h Rated	99 %	Temperature			
LSF Preheat 16000 h Rated	97 %	Design Temperature (Nom)		35 °C	
LSF Preheat 20000 h Rated	84 %	Controls and Dimming			
Light Technical		Dimmable		Yes	
Color Code	830 [CCT of 3000K]	Mechanical and Housing			
Initial lumen (Nom)	1350 lm	Cap-Base Information		Green [Green Cap]	
Luminous Flux (Rated) (Nom)	1200 lm	Approval and Application			
Color Designation	Warm White (WW)	Energy Efficiency Label (EEL)		A	
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W	Mercury (Hg) Content (Nom)		1.4 mg	
Correlated Color Temperature (Nom)	3000 K	Product Data			
Luminous Efficacy (rated) (Nom)	86 lm/W	Order product name		14W/830 Min Bipin T5 HE ALTO UNP/40	
Color Rendering Index (Max)	85				
Color Rendering Index (Min)	80				
Color Rendering Index (Nom)	82				
LLMF 2000 h Rated	96 %				
LLMF 4000 h Rated	95 %				

T5 Standard


EAN/UPC - Product	046677230777
Order code	230771
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927990483022

Net Weight (Piece)	54.000 g
ILCOS Code	FDH-14/30/1B-L/P-G5-16

Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Dimensional drawing

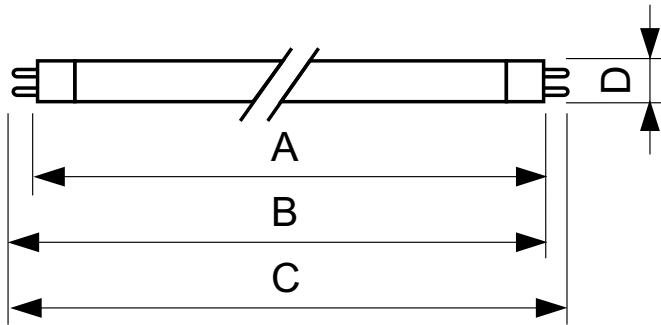


TL5 HE F14T5/830 HE Alto

Product	D (max)	A (max)	B (max)	B (min)	C (max)
14W/830 Min Bipin T5 HE	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm
ALTO UNP/40					

Photometric data

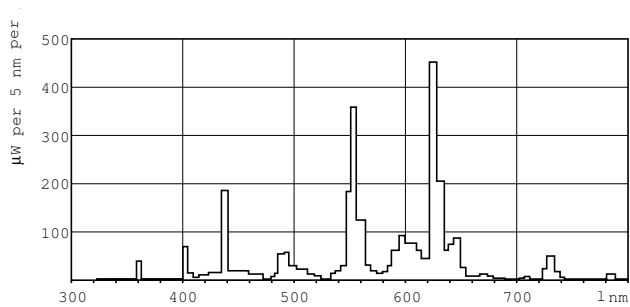

Lightcolor /830

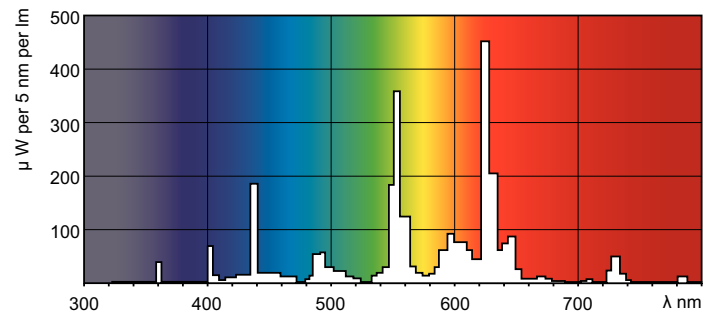

Lightcolor /830


T5 Standard

Lifetime



MASTER TL5 HE Life Expectancy 3 h cycle

MASTER TL5 HE Life Expectancy 12 h cycle

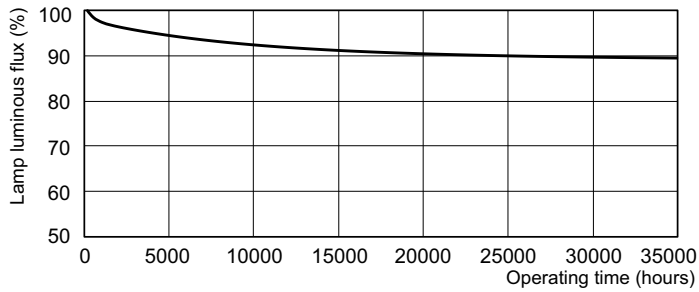

MASTER TL5 HE Lumen Maintenance 3 h + 12 h cycle

