Powering Business Worldwide

pe.eaton.com

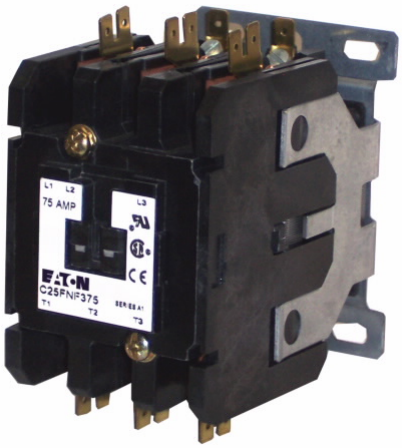

Definite Purpose Control - Contactor

C25FNF375A

UPC:782114117453

Dimensions:

- **Height:** 3.75 IN
- **Length:** 3.97 IN
- **Width:** 2.63 IN

Weight:2.8 LB

Notes: Resitive Load rating per pole

Warranties:

- 1 year

Specifications:

- **Connection:** Quick
- **Amperage Rating:** 75A
- **Coil:** 110-120 Vac, 50/60 Hz
- **Enclosure:** Open with metal mounting plate
- **Frame Size:** 60-75A, two- and three-pole
- **Model:** Contactor
- **Number Of Poles:** Three-pole
- **Resistive Load:** 90A
- **Terminals:** Box lugs (posidrive setscrew) and quick connect terminals (side-by-side)
- **Type:** Non-reversing

Supporting documents:

- Eatons Volume 5-Motor Control and Protection
- C25FNF3 AutoCAD 2D Footprint (mm)
- C25FNF3 3D Inventor
- C25FNF3 3D Model Xchange
- C25FNF3 2D PDF
- C25FNF3 AutoCAD 2D Footprint
- Eaton Specification Sheet - C25FNF375A

Certifications:

- CSA Certified
- UL Recognized

Product compliance: No Data

© 2016 Eaton. All rights reserved.