



PASS & SEYMOUR® Decorator Devices Plug Load Controllable Decorator Receptacles

26252CH, 26352CH, 26252CD, 26352CD
TR26262CH, TR26362CH, TR26262CD, TR26362CD

Tough decorator-style receptacles designed for energy savings.

These durable, dependable receptacles are designed to help you meet ASHRAE energy standards. The controlled receptacle marking printed on the face of the receptacle is both NEMA-approved and compliant with the National Electrical Code®. Tough nylon faces provide superior impact resistance, and the heavy-gauge steel straps are locked into receptacle bodies to beat pull-outs. These dependable performers feature extra-durable, single-piece, triple-wipe brass power contacts, too. Screw-pressure-plate back wiring and auto-ground speed installation.



FEATURES & BENEFITS

Pad-printed ink on face of receptacle for superior abrasion resistance.

Controlled receptacle marking is NEMA-approved and compliant with 2014 NEC®.

Can be used to control loads using WattStopper® DLM and other building control systems.

CH Version Only: Split circuit tab broken at the factory, allowing half of the receptacle to be controlled.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.



.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.

Auto-ground eliminates the necessity to terminate grounding conductor in device.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Dual mechanical shutter system to help prevent insertion of foreign objects (in Tamper-Resistant models).

FIELD USES / VERTICAL MARKETS

- Office
- Education
- Institutional
- Hospitality/Lodging
- MDU



PASS & SEYMOUR®


Decorator Devices

Plug Load Controllable Decorator Receptacles

TECHNICAL INFORMATION

Catalog #	Ratings	Color	NEMA Config.
Half-Controlled Duplex Receptacles Back & Side Wire			
26252CHI	15A 125V	Ivory	5-15R
26252CHW	15A 125V	White	5-15R
26252CH	15A 125V	Brown	5-15R
26252CHGRY	15A 125V	Gray	5-15R
26252CHBK	15A 125V	Black	5-15R
26252CHRED	15A 125V	Red	5-15R
26252CHLA	15A 125V	Light Almond	5-15R
26252CHBL	15A 125V	Blue	5-15R
26252CHGN	15A 125V	Green	5-15R
26352CHI	20A 125V	Ivory	5-20R
26352CHW	20A 125V	White	5-20R
26352CH	20A 125V	Brown	5-20R
26352CHGRY	20A 125V	Gray	5-20R
26352CHBK	20A 125V	Black	5-20R
26352CHRED	20A 125V	Red	5-20R
26352CHLA	20A 125V	Light Almond	5-20R
26352CHBL	20A 125V	Blue	5-20R
26352CHGN	20A 125V	Green	5-20R
Tamper-Resistant Half-Controlled Duplex Receptacles Back & Side Wire			
TR26262CHI	15A 125V	Ivory	5-15R
TR26262CHW	15A 125V	White	5-15R
TR26262CH	15A 125V	Brown	5-15R
TR26262CHGRY	15A 125V	Gray	5-15R
TR26262CHLA	15A 125V	Light Almond	5-15R
TR26362CHI	20A 125V	Ivory	5-20R
TR26362CHW	20A 125V	White	5-20R
TR26362CH	20A 125V	Brown	5-20R
TR26362CHGRY	20A 125V	Gray	5-20R
TR26362CHBK	20A 125V	Black	5-20R
TR26362CHLA	20A 125V	Light Almond	5-20R

Catalog #	Ratings	Color	NEMA Config.
Dual-Controlled Duplex Receptacles Back & Side Wire			
26252CDI	15A 125V	Ivory	5-15R
26252CDW	15A 125V	White	5-15R
26252CD	15A 125V	Brown	5-15R
26252CDGRY	15A 125V	Gray	5-15R
26252CDBK	15A 125V	Black	5-15R
26252CDRED	15A 125V	Red	5-15R
26252CDLA	15A 125V	Light Almond	5-15R
26252CDBL	15A 125V	Blue	5-15R
26252CDGN	15A 125V	Green	5-15R
26352CDI	20A 125V	Ivory	5-20R
26352CDW	20A 125V	White	5-20R
26352CD	20A 125V	Brown	5-20R
26352CDGRY	20A 125V	Gray	5-20R
26352CDBK	20A 125V	Black	5-20R
26352CDRED	20A 125V	Red	5-20R
26352CDLA	20A 125V	Light Almond	5-20R
26352CDBL	20A 125V	Blue	5-20R
26352CDGN	20A 125V	Green	5-20R
Tamper-Resistant Dual-Controlled Duplex Receptacles Back & Side Wire			
TR26262CDI	15A 125V	Ivory	5-15R
TR26262CDW	15A 125V	White	5-15R
TR26262CD	15A 125V	Brown	5-15R
TR26262CDGRY	15A 125V	Gray	5-15R
TR26262CDLA	15A 125V	Light Almond	5-15R
TR26362CDI	20A 125V	Ivory	5-20R
TR26362CDW	20A 125V	White	5-20R
TR26362CD	20A 125V	Brown	5-20R
TR26362CDGRY	20A 125V	Gray	5-20R
TR26362CDBK	20A 125V	Black	5-20R
TR26362CDLA	20A 125V	Light Almond	5-20R



For more information on these and other P&S products refer to our Catalog or visit our web site.

DIMENSIONS

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498
 Fed Spec WC596 , CSA C22.2 No. 42,
 CSA/CUL approved, File Number LR16063, Standard CSA-C22.2 No. 42

Performance

Electrical


Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only.
Product Identification	Ratings are permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

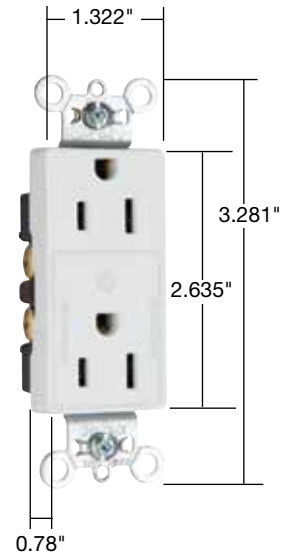

26252CHW

Materials

Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Zinc-Plated Steel
Ground Contacts	.040" 260 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Steel (Neutral = Nickel Plated Steel)
Ground Screw	#8 Hex Tri-Drive Steel
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel
Mounting Screws	Tri-Drive Steel
Ink	Pad Printed
Tamper-Resistant Shutters	Thermoplastic

Warranty

1 Year

ALSO AVAILABLE...

- Hospital Grade Devices
- PlugTail® Devices
- SPD & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca