

### Dual Room miniZ™


**Intelligent Daylight Management System. Independently control two individual rooms with one compact device.**

#### DESCRIPTION

The dual room miniZ™ allows two individual rooms to be independently controlled (single zone for each room) and offers the same performance features as the popular miniZ™ with a compact, versatile, cost-effective, code-compliant approach to daylight harvesting. This self-contained, self-configuring intelligent daylight management system meets a wide variety of commercial lighting needs, from basic switching to dual room/single zone per room daylight harvesting. It combines daylight harvesting, occupancy sensing, and flexible lighting control functions into a single, easily installed package. Providing install-and-forget convenience, the dual room miniZ™ features several methods of ladderless commissioning; one of which is the AutoCal feature, the first self-calibrating daylight harvesting system. The performance features and capabilities of the dual room miniZ™ provides an optimal package that surpasses any other daylight management system.

#### FEATURES

- Two individual room control (single zone for each room) combining separate daylight harvesting, occupancy sensors, and switching in one compact box
- Ladderless Commissioning™ provides install-and-forget convenience
- Autocal™ setting (patent pending) automatic photocell calibration
- Automatic closed loop setting (one zone per room) daylight control
- Automatic Correction setting for Light Loss Factor (LLF) recognizes and corrects for Lumen Maintenance Issues
- Simplified daylight harvesting with 3% to 100% dimming capabilities (0-10V fluorescent dimming ballasts required)
- Automatic Daylight Harvest Mode provides optimum lighting output for additional energy savings potential
- Convenient two occupancy sensor and two photocell integration
- Daylight switching, full range 0-10V dimming and network models available
- Cost effective energy code compliance

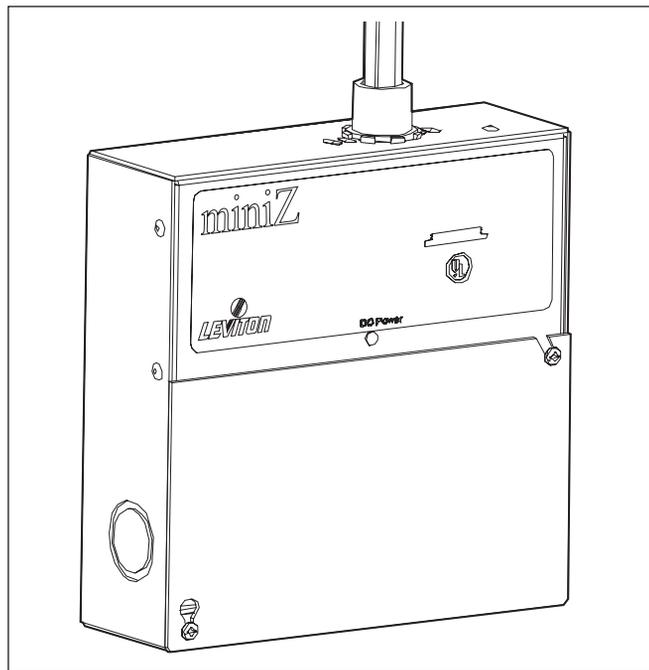

**Dual Room miniZ™ Intelligent Daylight Management System**

- Simplified integration with emergency and building automation systems
- Accepts external time clock inputs
- Closed loop or open loop daylight control
- Isolated contacts for HVAC relay

#### NETWORK FEATURES

- Luma-CAN Network Support
- Network Digital Switches
- Z-MAX Master/Slave Network Participation
- Remote Shared Network Inputs
- Scalable System Expansion

#### DIMENSIONS

- 6.65"L x 6.65"H x 2.1"D
- Shipping Weight: 4lbs.
- Unit Weight: 3.3lbs.
- 1/2" & 3/4" conduit knockouts
- 1/2" nipple with pigtails for easy wire connections

#### AGENCY STANDARDS AND COMPLIANCE

- UL and cUL Listed
- CEC Title-24 Listed
- Backed by Limited Five-Year Warranty

Dual Room miniZ™

**LEVITON** SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>



Leviton Mfg. Co., Inc.  
P.O. Box 2210 • Tualatin, Oregon 97062 • Phone: (503)404-5500 • Fax: (503) 404-5600

Visit our Website at: [www.leviton.com](http://www.leviton.com)




# Product Specifications

## Dual Room miniZ™

### SIMPLEST INSTALL STEPS


1. Physically install unit and any peripherals
2. Terminate power & control wiring
3. Enable AutoCal & Auto-Burn-In
4. Power up system
5. Installation & configuration complete!

1/2" nipple for convenient connection to junction box



Control Input (120-277VAC or 347VAC)\*  
Neutral  
Room 1 Line  
Room 1 Load  
Room 1 Output (0-10V)\*  
Room 2 Line  
Room 2 Load  
Room 2 Output (0-10V)\*

### Low Voltage Terminal & Configuration Board

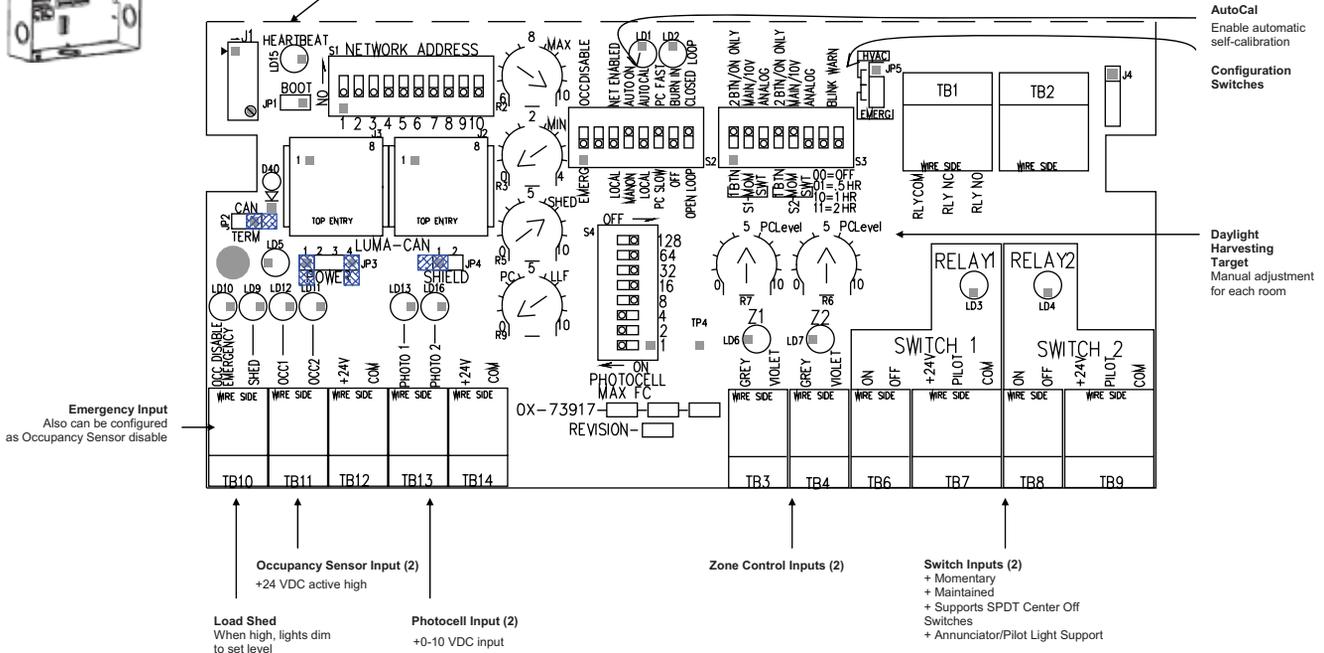

\* Available only on dimming models.

### LOAD RATINGS:

- 20A per relay, 120/277V
- 15A per relay, 347V
- Fluorescent, non-dimmed and 0-10V dimmed
- 120mA power output for operation of occupancy sensors, etc.

### POWER

- Input Power: 120, 277, or 347V\*; 10w Max, 50/60Hz
- Output Power: 2 circuits, up to 277V, 20A, or 2 circuits, up to 347V, 15A
- Output 0-10V Control: 0 or 2\*
- Available Peripheral Power: 120mA, 24V

### ORDERING INFORMATION

Model	Description	0-10V Outputs	Relay Outputs	CAN Network
mzb02-102	miniZ™ Basic, Dual Room, 2 Relay, 120V – 277V	0	2	No
mzd22-102	miniZ™ Dimming, Dual Room, 2 Relay, 120V – 277V	2	2	No
mzn22-102	miniZ™ Dimming, Dual Room, 2 Relay, 120V – 277V	2	2	Yes*
mzb02-C02	miniZ™ Basic, Dual Room, 2 Relay, 347V	0	2	No
mzd22-C02	miniZ™ Dimming, Dual Room, 2 Relay, 347V	2	2	No
mzn22-C02	miniZ™ Dimming, Dual Room, 2 Relay, 347V	2	2	Yes*

\*Consult with factory for availability of network models.

### LEVITON SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:
JOB NUMBER:	