






M-7278 3

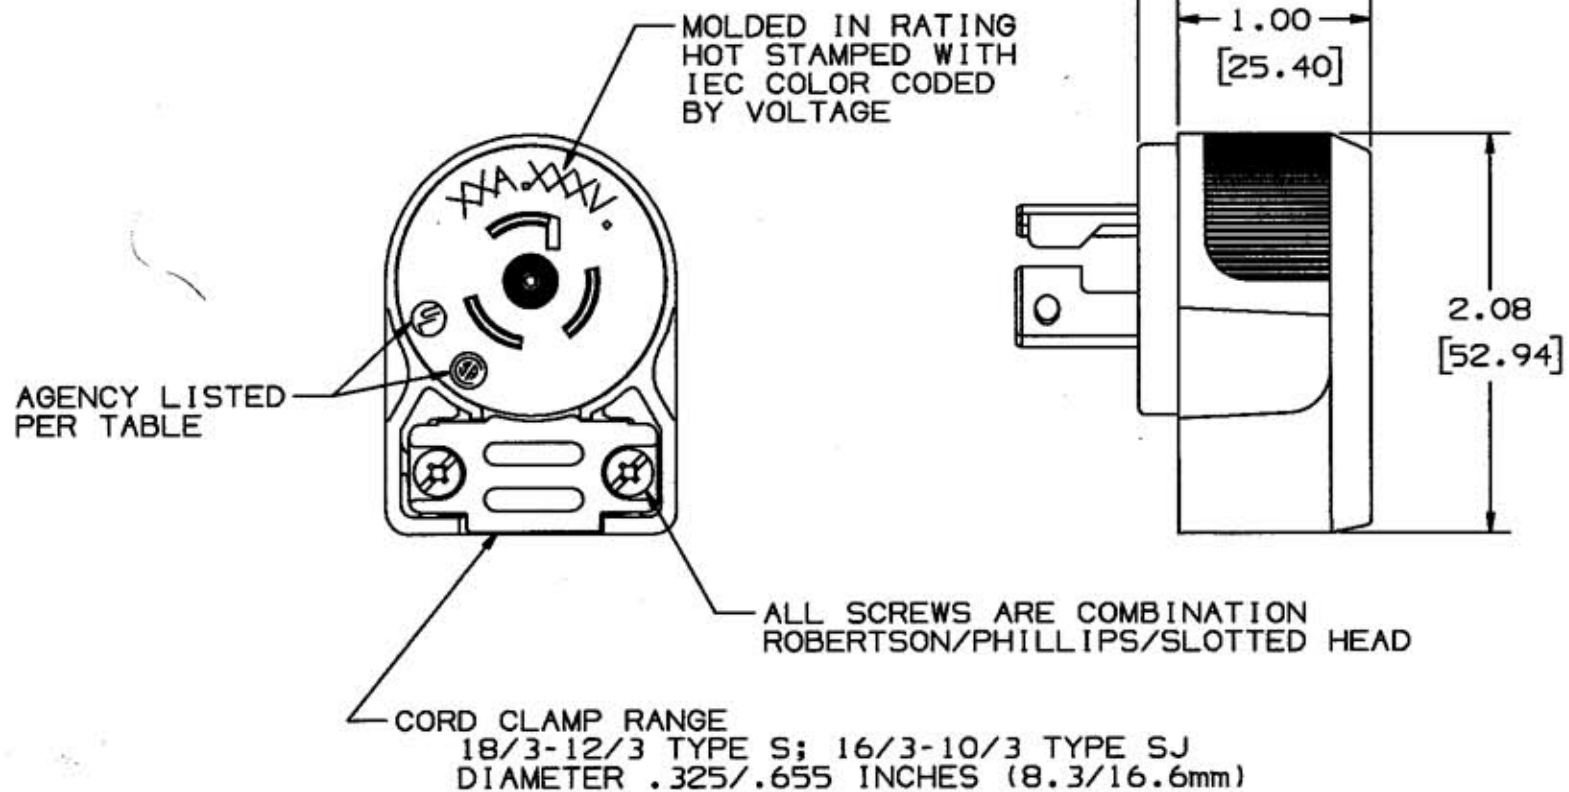

CORD CLAMP RANGE  
18/3-12/3 TYPE S; 16/3-10/3 TYPE SJ  
DIAMETER .325/.655 INCHES (8.3/16.6mm)

CAT. NO.	CONFIGURATION	RATING	IEC RATING COLOR	UL	CSA
HBL4720CA	NEMA L5-15R 	15A. 125V.	YELLOW	YES	YES
HBL4570CA	NEMA L6-15R 	15A. 250V.	BLUE	YES	YES
HBL4770CA	NEMA L7-15R 	15A. 277VAC	GRAY	YES	YES
HBL7567CA	3 POLE 3 WIRE NON GROUNDED 	10A 250V/ 15A 125V	BLACK	NO	NO

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
COVER	NYLON	BLACK
CORD CLAMP	POLYCARBONATE	BLACK
BLADE HOLDER	NYLON	NATURAL
RETAINER	LEXAN	CLEAR
WIRE CLAMP	.062 CRS	NICKEL PL
BLADES	BRASS	
TRI-DRIVE #8	BRASS	
TERMINAL SCREWS		
TRI-DRIVE	STEEL	ZINC PL
ASSEMBLY SCREWS		

3	REVISED VIEWS & CALLOUTS OF SCREWS TO TRI-DRIVE PER DCN #11421 RCM	DVB	1/27/04
2	IN LIST OF PARTS, "POLYCARBONATE WAS "LEXAN"; PER DCN #8898, JAN	CJC	2/18/02
1	"X" REMOVED PER DCN #2940 RCM	JZ	8/3/94
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
INSULGRIP  
2 POLE 3 WIRE  
TWIST-LOCK  
ANGLE PLUGS

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ±1/64	DR. BY RCM	APP. BY ZIMM
DECIMALS ±.005	TR. BY	SCALE --
ANGLES ±2°	CHK'D BY ZIMM	DATE 8/3/94