

NOTES:
1. IDENTIFICATION: 2RU HORIZONTAL, (6) L6-20R, METERED
208V / 20A / SINGLE-PHASE POU



2. ACCESSORY COMPONENTS:
(4) 10-32 x 1/2" MOUNTING SCREWS
(4) 12-24 x 1/2" MOUNTING SCREWS

4. POWER METER - RED, 4-DIGIT LED CONTINUOUSLY SCROLLS THROUGH POWER FACTOR, AMPS, VOLTS (RMS), AND REAL POWER IN WATTS (RMS).

6. RoHS COMPLIANT.

8. MAXIMUM AVAILABLE INPUT POWER = 3.3 KW

PANDUIT P/N	WEIGHT
HB1B1E0BA06J1	14 lb (6.3 kg)

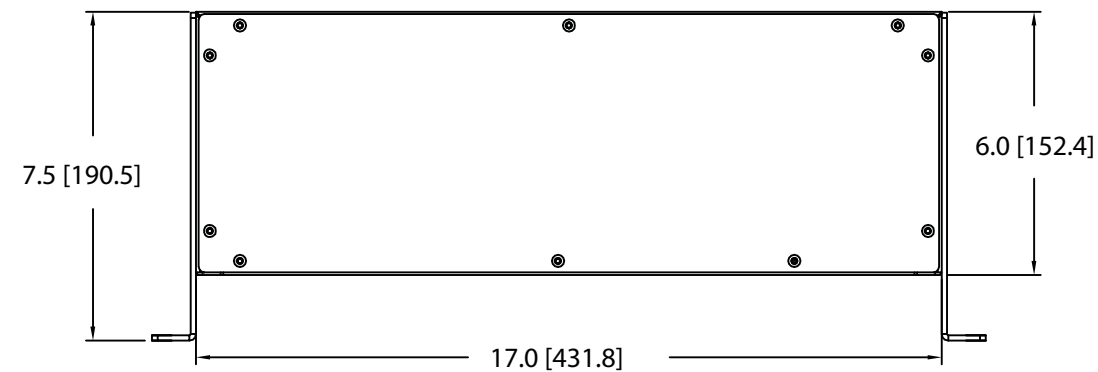

SIX (6)
RECEPTACLES
20 AMP, 250V
TWIST LOCK
NEMA L6-20R

01A	9-5-12	PIP	MRWA	A. UPDATED NOTE #5 & 8. B. ADDED NOTE #9.		09V098CC				
00A	2-24-11	MAV	KRKE	RELEASED TO PRODUCTION		09V098CC				
REV	DATE	BY	CHK	DESCRIPTION		ECN - R	CUST	SUP	OTH	

MODEL FILENAME		09V098CC/01.PRT	
CAD FILENAME/LAYERS		09V098CC_DC/01A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
2RU HORIZONTAL, (6) L6-20R, METERED POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005		[METRIC - MILLIMETER] X. +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13	
ANGLE		+/- 1°	
ALL DIMENSIONS ARE GIVEN IN		INCHES, THIRD ANGLE PROJECTION	
DRAWN BY	MAT'L:	SCALE	
MAV		NONE	
DATE		DRAWING NO.	DWG
2-24-11		09V098CC	B
CHK'D	KRKE		SIZE