


RCM+ Rack Mounted Vertical Cable Manager With Cover Double Sided Dual Density Style


- Double-sided SB864 Series cable managers utilize the SB860 and SB862 Series cable managers in back-to-back combination for use in applications with varying cable management requirements
- High-density extended fingers provide maximum cable support for each rack mounting space
- Low-density vertical cabling section can be used with RCM+ horizontal cable managers
- Front and rear vertical sections can be spaced apart when mounting on racks deeper than 3" (76mm), allowing cables to be routed out through side openings created between the vertical sections
- High-density vertical cable section can be used with RCM+ extended horizontal cable manager
- Snap-on gates on both sides allows for quick opening from either side or complete removal
- Open back design allows unrestricted routing of cables between front and rear sections
- Optional back removable covers are designed with pass through openings for cable routing, keyhole slots for cable spools, slots for cable straps, and keyhole slots for direct ePDU mounting
- Installation is easy and can be done in minutes using standard hand tools
- 1/4" (6.3mm) accessory mounting holes run the full height on both sides of cable manager to accommodate the attachment of cable management accessories
- UL Listed as a Communication Circuit Accessory. File No. E171936
- Material: Aluminum with UL 94V-0 black plastic components
- Finishes__: Flat Black Powder Coat (FB), Silver Powder Coat (SL), or Eaton White (EW)
- Vertical cable manager includes:
(2) vertical cabling sections, (1) door,
(50) push-in fasteners, (12) cable strap mounts, (4) cable retainer bars, required number of gates and mounting hardware



Top View

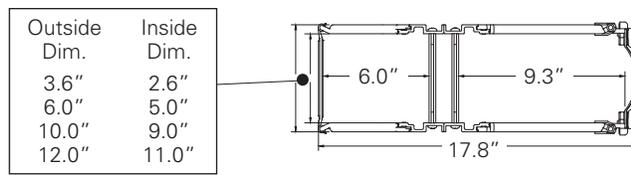

U.S. Patent 7,362,941
Other Patents Pending

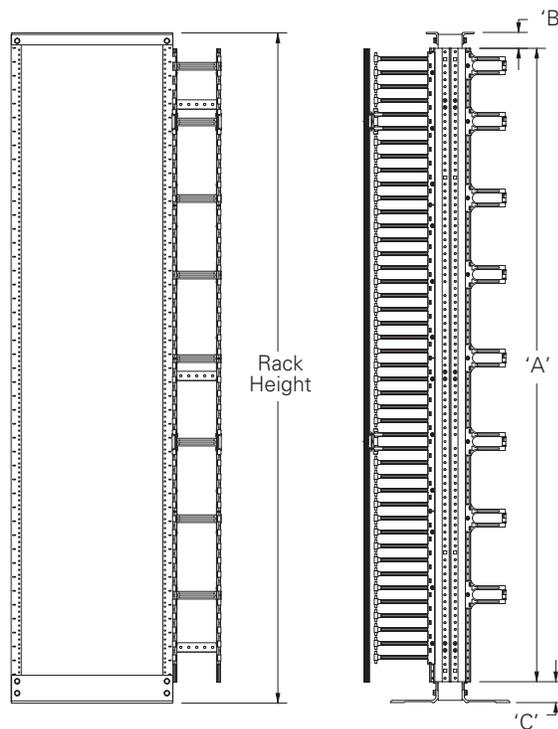

Double sided,
84" high x 6" wide
SB86486D084FB

Continued on page 19.

**RCM+ Rack Mounted Vertical Cable Manager cont.
Double Sided Dual Density Plastic Gate Style**

Catalog Number	Fits Rack Height of In. (mm)	'A' In. (mm)	'B' In. (mm)	'C' In. (mm)	Weight Each (kg)		Max CAT 6A Cables (0.25" OD) (50% Fill)
					Lbs.	(kg)	
3 ⁵ / ₈ " (92mm) Wide x 17 ⁷ / ₈ " (454mm) Deep							
SB86483D066 __	66" (1676)	60 ³ / ₈ " (1533)	3" (76.2)	2 ⁵ / ₈ " (66.7)	19.9	(9.0)	404
SB86483D072 __	72" (1829)	67 ³ / ₈ " (1711)	2" (50.8)	2 ⁵ / ₈ " (66.7)	22.3	(10.1)	404
SB86483D078 __	78" (1981)	72 ⁵ / ₈ " (1845)	2 ³ / ₄ " (69.9)	2 ⁵ / ₈ " (66.7)	24.1	(10.9)	404
✓ SB86483D084 __	84" (2133)	79 ⁵ / ₈ " (2022)	1 ³ / ₄ " (44.4)	2 ⁵ / ₈ " (66.7)	26.0	(11.8)	404
SB86483D090 __	90" (2286)	84 ⁷ / ₈ " (2156)	2 ¹ / ₂ " (63.5)	2 ⁵ / ₈ " (66.7)	27.6	(12.5)	404
SB86483D096 __	96" (2438)	90 ¹ / ₈ " (2289)	3 ¹ / ₄ " (82.6)	2 ⁵ / ₈ " (66.7)	29.3	(13.3)	404
SB86483D108 __	108" (2743)	102 ³ / ₈ " (2600)	3" (76.2)	2 ⁵ / ₈ " (66.7)	33.2	(15.0)	404
6" (152mm) Wide x 17 ⁷ / ₈ " (454mm) Deep							
SB86486D066 __	66" (1676)	60 ³ / ₈ " (1533)	3" (76.2)	2 ⁵ / ₈ " (66.7)	21.7	(9.8)	778
SB86486D072 __	72" (1829)	67 ³ / ₈ " (1711)	2" (50.8)	2 ⁵ / ₈ " (66.7)	24.3	(11.0)	778
SB86486D078 __	78" (1981)	72 ⁵ / ₈ " (1845)	2 ³ / ₄ " (69.9)	2 ⁵ / ₈ " (66.7)	26.3	(11.9)	778
✓ SB86486D084 __	84" (2133)	79 ⁵ / ₈ " (2022)	1 ³ / ₄ " (44.4)	2 ⁵ / ₈ " (66.7)	28.4	(12.9)	778
SB86486D090 __	90" (2286)	84 ⁷ / ₈ " (2156)	2 ¹ / ₂ " (63.5)	2 ⁵ / ₈ " (66.7)	30.1	(13.6)	778
SB86486D096 __	96" (2438)	90 ¹ / ₈ " (2289)	3 ¹ / ₄ " (82.6)	2 ⁵ / ₈ " (66.7)	32.1	(14.5)	778
SB86486D108 __	108" (2743)	102 ³ / ₈ " (2600)	3" (76.2)	2 ⁵ / ₈ " (66.7)	36.2	(16.4)	778
10" (254mm) Wide x 17 ⁷ / ₈ " (454mm) Deep							
SB864810D066 __	66" (1676)	60 ³ / ₈ " (1533)	3" (76.2)	2 ⁵ / ₈ " (66.7)	25.2	(11.4)	1402
SB864810D072 __	72" (1829)	67 ³ / ₈ " (1711)	2" (50.8)	2 ⁵ / ₈ " (66.7)	28.3	(12.8)	1402
SB864810D078 __	78" (1981)	72 ⁵ / ₈ " (1845)	2 ³ / ₄ " (69.9)	2 ⁵ / ₈ " (66.7)	30.4	(13.8)	1402
✓ SB864810D084 __	84" (2133)	79 ⁵ / ₈ " (2022)	1 ³ / ₄ " (44.4)	2 ⁵ / ₈ " (66.7)	32.9	(14.9)	1402
SB864810D090 __	90" (2286)	84 ⁷ / ₈ " (2156)	2 ¹ / ₂ " (63.5)	2 ⁵ / ₈ " (66.7)	34.8	(15.8)	1402
SB864810D096 __	96" (2438)	90 ¹ / ₈ " (2289)	3 ¹ / ₄ " (82.6)	2 ⁵ / ₈ " (66.7)	37.2	(16.9)	1402
SB864810D108 __	108" (2743)	102 ³ / ₈ " (2600)	3" (76.2)	2 ⁵ / ₈ " (66.7)	42.0	(19.0)	1402
12" (305mm) Wide x 17 ⁷ / ₈ " (454mm) Deep							
SB864812D066 __	66" (1676)	60 ³ / ₈ " (1533)	3" (76.2)	2 ⁵ / ₈ " (66.7)	29.4	(13.3)	1714
SB864812D072 __	72" (1829)	67 ³ / ₈ " (1711)	2" (50.8)	2 ⁵ / ₈ " (66.7)	32.9	(14.9)	1714
SB864812D078 __	78" (1981)	72 ⁵ / ₈ " (1845)	2 ³ / ₄ " (69.9)	2 ⁵ / ₈ " (66.7)	35.5	(16.1)	1714
SB864812D084 __	84" (2133)	79 ⁵ / ₈ " (2022)	1 ³ / ₄ " (44.4)	2 ⁵ / ₈ " (66.7)	38.3	(17.4)	1714
SB864812D090 __	90" (2286)	84 ⁷ / ₈ " (2156)	2 ¹ / ₂ " (63.5)	2 ⁵ / ₈ " (66.7)	40.6	(18.4)	1714
SB864812D096 __	96" (2438)	90 ¹ / ₈ " (2289)	3 ¹ / ₄ " (82.6)	2 ⁵ / ₈ " (66.7)	48.5	(19.7)	1714
SB864812D108 __	108" (2743)	102 ³ / ₈ " (2600)	3" (76.2)	2 ⁵ / ₈ " (66.7)	48.9	(22.2)	1714

Finish__ : Flat Black Powder Coat (FB), Silver Powder Coat (SL), or Eaton White (EW)

✓ Popular items include (FB) 84" high in 3⁵/₈", 6" and 10" widths

A = Height of RCM+ vertical section without doors

B = Distance between the top of the rack and the top of the RCM+ cable manager

C = Distance between the floor and the lowest part of the RCM+ cable manager

Note: Doors are not furnished on rear side cable managers, can be ordered separately.