




Catamount®

L-14-40-* HAS STRAIGHT TAIL

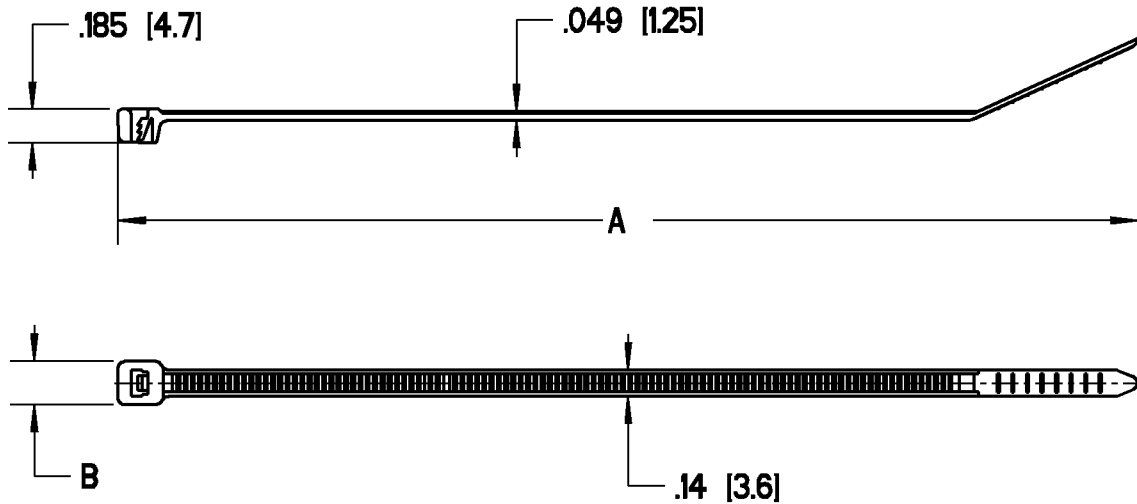

NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 40 LBS [178 N]
5. INSTALLATION TOOL/SETTING: ERG50 3-5

CATALOG NUMBER	MINIMUM BUNDLE Ø in [mm]	MAXIMUM BUNDLE Ø in [mm]	MIN INSTALL TEMP °F [°C]	A in [mm]	B in [mm]
L-8-40-*-**	.08 [2]	2.20 [56]	32 [0]	8.46 [215.0]	.25 [6.4]
L-8-40FL-*-**	.08 [2]	2.20 [56]	32 [0]	8.46 [215.0]	.25 [6.4]
L-11-40-*-**	.08 [2]	2.99 [76]	32 [0]	11.77 [299.0]	.264 [6.7]
L-14-40-*-**	.08 [2]	4.02 [102]	-4 [-20]	14.57 [370.1]	.264 [6.7]

* = COLOR CODE - 0= BLACK (OUTDOOR) 4= YELLOW 8= GRAY 17= FLUORESCENT YELLOW
 1= BROWN 5= GREEN 9= NATURAL 18= FLUORESCENT GREEN
 2= RED 6= BLUE 11= FLUORESECENT PINK 20= FLUORESCENT BLUE
 3= ORANGE 7= PURPLE 16= FLUORESCENT ORANGE

** = PACKAGING - C= STD PKG (100) D= BULK PKG (500) M= BULK PKG (1,000)

CONSULT CUSTOMER SERVICE FOR PACKAGE QUANTITY AVAILABILITY
 FLUORESCENT COLORS ARE NOT UL LISTED

GENERAL NOTES		 A Member of the ABB Group			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.					
REVISIONS		DESCRIPTION: 8", 11" & 14" SERIES 40 INTERMEDIATE CABLE TIES			
1	SEE ERN 2016442 FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: 054P000575	ORIGINAL PROJECT NO / (ERN NO) FM401182 / (2006127)	SHEET NO: 1 OF 1	REV. NO: 1	DRAWING NO: WSD-000221