



PL-S Short 2-Pin Base

PL-S 13W/835/2P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Warnings and Safety

· Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information			
Base	GX23 [GX23]		
Life To 10% Failures (Nom)	0 h		
Life to 50% Failures (Nom)	10000 h		
LSF 2000 h Rated	99 %		
LSF 4000 h Rated	98 %		
LSF 6000 h Rated	95 %		
LSF 8000 h Rated	86 %		
Light Technical			
Color Code	835 [CCT of 3500K]		
Initial lumen (Nom)	825 lm		
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3500 K		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	94 %		
LLMF 4000 h Rated	91 %		
LLMF 6000 h Rated	89 %		

LLMF 8000 h Rated	86 %	
Operating and Electrical		
Power (Rated) (Nom)	13 W	
Lamp Current (Nom)	0.290 A	
Temperature		
Design Temperature (Nom)	28 °C	
Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Cap-Base Information	2P	
Approval and Application		
Energy Efficiency Label (EEL)	В	


Datasheet, 2020, November 18 data subject to change

PL-S Short 2-Pin Base

Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	PL-S 13W/835/2P/ALTO
EAN/UPC - Product	046677146849
Order code	146845
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10	
Material Nr. (12NC)	927902783521	
Net Weight (Piece)	35.000 g	
ILCOS Code	FSD-13/27/1B-I-GX23	

Dimensional drawing




PL-S ALTO 13W/835/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-S 13W/835/2P/ALTO	28 mm	13 mm	139.5 mm	155.2 mm	177.7 mm

Photometric data

m

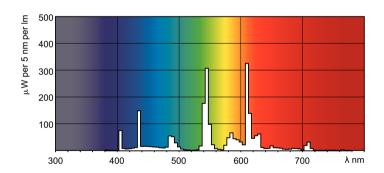


LDPB_PLS2PLM_835-Spectral power distribution B/W

LDPO_PLS2PLM_835-Spectral power distribution Colour

PL-S Short 2-Pin Base

Lifetime

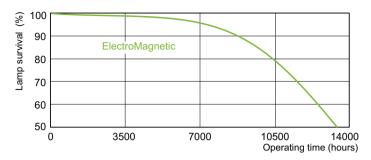



LDLE_PLS2PLM_0002-Life expectancy diagram

LDLE_PLS2PLM_0001-Life expectancy diagram



LDLM_PLS2PLM_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.