


**M-5872**

**1**

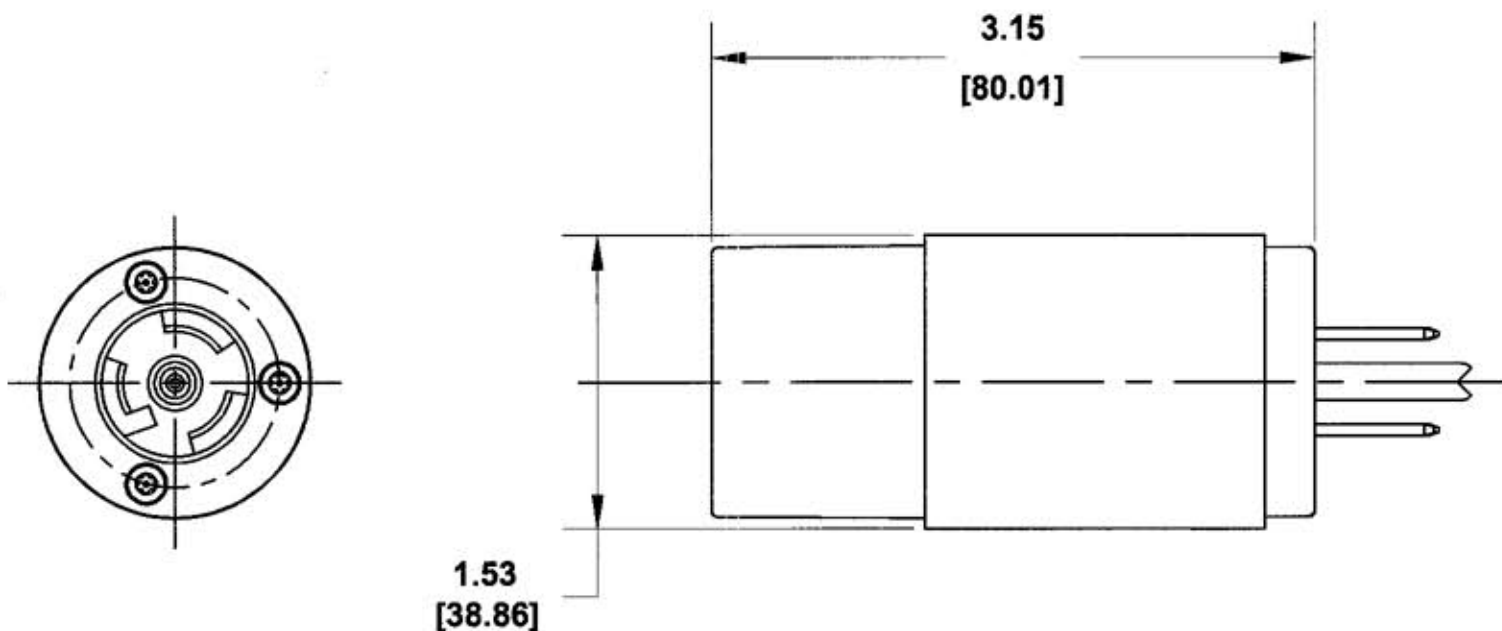

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
SPACER	NYLON	NATURAL
LEAD WIRES		
RETAINERS	POLYCARBONATE	CLEAR
WIRE CLAMPS	CRS	NICKEL
BIND PL. CONT. SPR.	BRASS	
INNER SPRING	BRASS	
BINDING SCREWS	BRASS	
GR. HEX HD. BIND. SCRS.	BRASS	GREEN
BLADES	BRASS	
BODY	NYLON	NATURAL
BLADE HOLDER	NYLON	NATURAL

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE

NON-REPAIRABLE

**B**

**M-5872**

**1**

CAT. NO.	SLOT END		BLADE END	
	CONFIGURATION	RATING	CONFIGURATION	RATING
HBL2270	NEMA 5-20R	20A 125V	NEMA 5-15P	15A 125V
HBL2274	NEMA 5-20R	20A 125V	NEMA L5-15P	15A 125V
HBL2271	NEMA L5-15R	15A 125V	NEMA 5-15P	15A 125V

**NOTES: (UNLESS OTHERWISE SPECIFIED)**

- 1) DIMENSIONS ARE: INCHES [MM]
- 2) .XX TOLERANCE TO BE ±.03 [0.76]

1	REDRAWN ON CAD ON UPDATED FORMAT. ADDED NOTES 1 & 2, HBL TO P/N'S IN TABLE, METRIC DIM.'S. DECIMAL DIM.'S WERE FRACTIONAL. REMOVED CAT. NO. 2272, 2275 AND 2273 FROM TABLE. TORX SCREWS WERE SLOTTED. IN PARTS LIST: POLYCARBONATE WAS LEXAN, NICKEL WAS ZINC PLATE, FOR BIND. PL. CONT. SPR. AND INNER SPRING BRASS WAS BRONZE. SUPERSEDES DRAWING DATED 2-26-76. PER DCN # 13355 DCK	DJP	12/14/06
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE  
**ADAPTERS**

TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 2°	WIRING DEVICE—KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
	DR. BY C/JG	APP. BY XXX
	TR. BY DCK	SCALE FULL
	CHK'D BY XXX	DATE 12/14/06