



# T5 Preheat

## F13T5/30U 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

### Product data

General Information	
Cap-Base	G5 [ G5]
Life to 10% Failures (Nom)	4000 h
Life to 50% Failures (Nom)	8000 h
Life to 50% Failures Preheat (Nom)	8000 h
Light Technical	
Color Code	830 [ CCT of 3000K]
Initial lumen (Nom)	1000 lm
Color Designation	Warm White (WW)
Lumen Maintenance 10000 h (Nom)	71 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	77 %
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Color Rendering Index (Nom)	83
Operating and Electrical	
Power (Rated) (Nom)	13.0 W
Lamp Current (Nom)	0.170 A
Voltage (Nom)	90 V


Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	14 kWh
Product Data	
Order product name	F13T5/30U 25PK
EAN/UPC - Product	046677207038
Order code	207035
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928001508332
Net Weight (Piece)	40.200 g
ILCOS Code	FD-13/30/1B-E-G5

### Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

# T5 Preheat



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
F13T5/30U 25PK	16 mm	516.9 mm	524.0 mm	521.6 mm	531.1 mm

TL 13W/830

## Photometric data

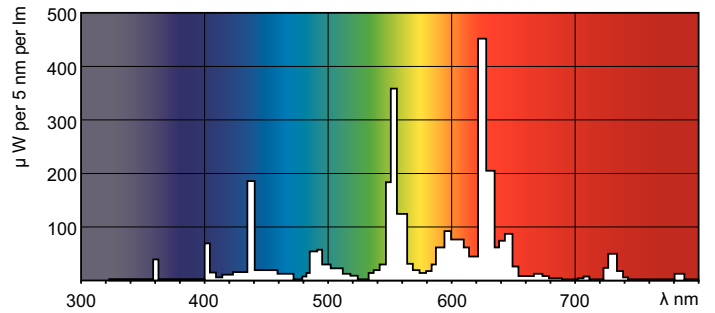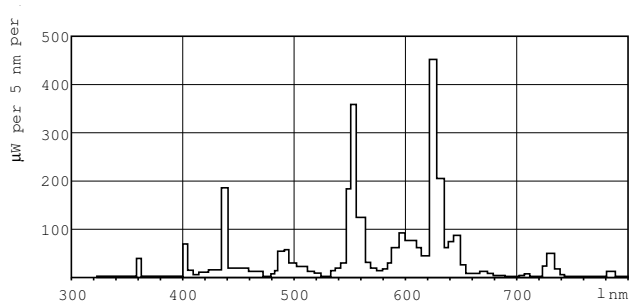

Lightcolor /830

Lightcolor /830

