



LED PAR30 S/L

12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data


| General Information | |
|---------------------------------------|------------------------------------|
| Base | E26 [Single Contact Medium Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 12-75W |
| Light Technical | |
| Color Code | 930 [CCT of 3000K] |
| Beam Angle (Nom) | 25 ° |
| Initial lumen (Nom) | 880 lm |
| Luminous Intensity (Nom) | 4500 cd |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 73 lm/W |
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and Electrical | |
| Input Frequency | 60 Hz |
| Power (Rated) (Nom) | 12 W |
| Lamp Current (Nom) | 120 mA |
| Wattage Equivalent | 75 W |

| Starting Time (Nom) | 0.5 s |
|---------------------------------|---|
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.9 |
| Voltage (Nom) | 120 V |
| Temperature | |
| T-Case Maximum (Nom) | 90 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Approval and Application | |
| Energy Efficiency Label (EEL) | Not applicable |
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | - kWh |
| Product Data | |
| Order product name | 12PAR30S/EXPERTCOLOR RETAIL/ F25/930/DIM |
| EAN/UPC - Product | 046677471071 |
| Order code | 471078 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929001286004 |

LED PAR30 S/L

Net Weight (Piece) 0.220 kg


Dimensional drawing




PAR30S 120V 12-75W 25D 3000K E26 D WH

| Product | D | C |
|---|---------|---------|
| 12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM | 94.8 mm | 93.1 mm |


Photometric data

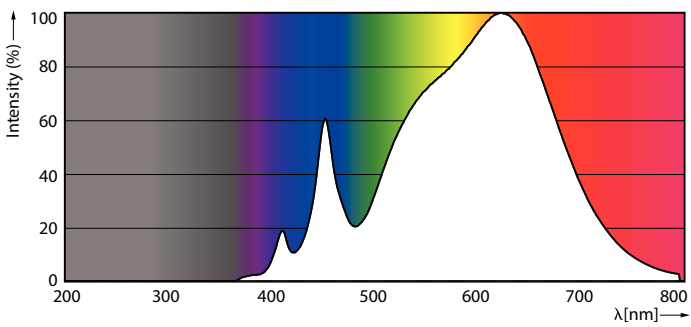

PAR38 120V 17-90W 1200lm 8D 3000K E26 D

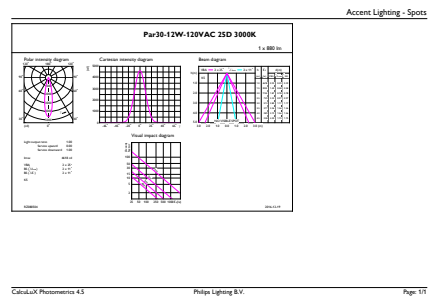

PAR30S 120V 12-75W 25D 3000K E26 D WH

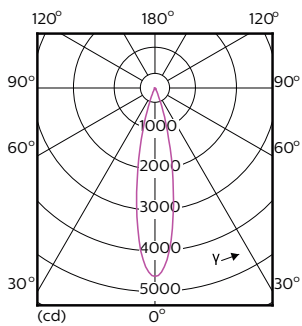

PAR30S 120V 12-75W 25D 3000K E26 D WH

LED PAR30 S/L

Lifetime



ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

ExpertColor PAR38 30S 30L Dim 120V Lumen Maintenance Diagram

