


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

TWIST TIE

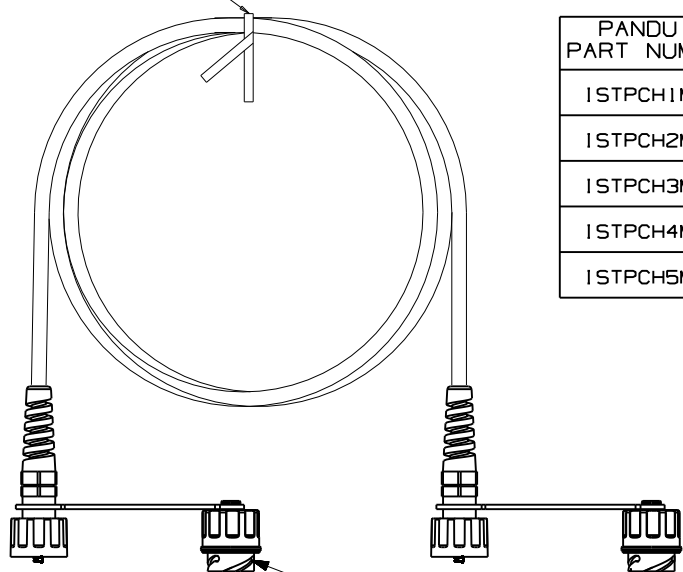

PANDUIT PART NUMBER	MIN. CABLE LENGTH	WEIGHT
ISTPCH1MBLY	1 M	1.82 lbs/10 PCS (825.8 g/10 PCS)
ISTPCH2MBLY	2 M	3.64 lbs/10 PCS (1651.6 g/10 PCS)
ISTPCH3MBLY	3 M	5.46 lbs/10 PCS (2477.5 g/10 PCS)
ISTPCH4MBLY	4 M	7.28 lbs/10 PCS (3303.3 g/10 PCS)
ISTPCH5MBLY	5 M	9.10 lbs/10 PCS (4129.1 g/10 PCS)

NOTES:

- **1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
- 2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
- 3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
- 4. CABLE MEETS CATEGORY 5E REQUIREMENTS AND CURRENT ODVA REQUIREMENTS FOR INDUSTRIAL CABLE.
- 5. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.


T568A WIRING

PLUG POSITION	CABLE WIRE
1	WHITE GREEN
2	GREEN
3	WHITE ORANGE
4	BLUE
5	WHITE BLUE
6	ORANGE
7	WHITE BROWN
8	BROWN

PLUG CAPS - ON ISTPCH*MBLY PARTS ONLY

SIZE

A

DRAWING FILENAME		M02479PH_DC371_00A.PRT
CATEGORY 5E INDUSTRIALNET, SFTP, SOLID, PATCH CORDS WITH PANDUIT PLUG CAPS CUSTOMER DRAWING		
 PANDUIT ^R CORP. TINLEY PARK, IL 60477	I.I. NUMBER	
	PRODUCT SPEC	
ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± .03(.8) (.XXX) ± .010(.3) (.XX) ± .005 ANGLES ±	WORK INSTRUCTION	
	SCALE	NONE
DRAWN BY	MDJr	PART NO.
DATE	4-22-04	ISTPCH*MBLY
CHK'D		DRAWING NO.
		02479-371

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH
R	4-11-07	MDJr		RELEASED TO PRODUCTION	02092-03				