

BALDOR® • **RELIANCE**

Product Information Packet

VL3507

.75HP, 1725RPM, 1PH, 60HZ, 56C, 3428LC, TEFC

Part Detail							
Revision:	S	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3428LC	Elec. Spec:	34WGY094	CD Diagram:	
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34G452	Layout:	
Frame:	56C	Mounting:	F1	Poles:	04	Created Date:	
Base:	N	Rotation:	R	Insulation:	B	Eff. Date:	06-10-2011
Leads:	6#18	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L

CAT.NO.	VL3507						
SPEC.	34G452Y094						
HP	.75						
VOLTS	115/230						
AMP	8.4/4.2						
RPM	1725						
FRAME	56C	HZ	60	PH	1		
SER.F.	1.25	CODE	J	DES	N	CLASS	B
NEMA-NOM-EFF	72	PF	78				
RATING	40C AMB-CONT						
CC		USABLE AT 208V	5.4				
DE	6203	ODE	6203				
ENCL	TEFC	SN					
	SFA 10/5						

Parts List		
Part Number	Description	Quantity
SA079726	SA 34G452Y094	1.000 EA
RA073151	RA 34G452Y094	1.000 EA
OC3020F12SP	CYL OIL CAP 20MFD/370V	1.000 EA
EC1270A02SP	ELEC CAP, 270-324 MFD, 125V, 1.48D X 3.	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
34CB3801	CAPACITOR BOX, DIE CAST	1.000 EA
34GS3002	GASKET, CAPACITOR BOX	1.000 EA
34GS5003A01	FOAM SLEEVE, ID = 2 1/16" X 4 3/8"	1.000 EA
51XB1214A08	12-14 X 1/2HX WS SL SR TYBX	2.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3300A24SP	PU ENDPLATE, MACH	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
34FH4002A01SP	IEC FH NO GREASER	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA

Parts List (continued)		
Part Number	Description	Quantity
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY 55 GALLONS	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
SP5056A18	MODEL 34 TYPE LC STATIONARY SWITCH WITH	1.000 EA
HA3100A37	THRUBOLT 10-32 X 8.500	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0001A01	CONN LABEL / WARNING LABEL (LC0001 / LB1	1.000 EA
NP1256L	ALUM, UL CSA CC, W/O THERMAL, LASER	1.000 EA
34PA1005	PACKING GROUP, BALDOR	1.000 EA
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
PK3083T	STYROFOAM PACKING CRADLE W/TAPE	1.000 EA


Performance Data at 230V, 60Hz, 0.75HP (Typical performance - Not guaranteed values)
General Characteristics

Full Load Torque:	2.25 LB-FT	Start Configuration:	DOL
No-Load Current:	2.8 Amps	Break-Down Torque:	5.7 LB-FT
Line-line Res. @ 25°C.:	3.22 Ohms A Ph / 1.76 Ohms B Ph	Pull-Up Torque:	5.0 LB-FT
Temp. Rise @ Rated Load:	71 C	Locked-Rotor Torque:	6.9 LB-FT
Temp. Rise @ S.F. Load:	89 C	Starting Current:	24.7 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	43.0	57.0	70.0	78.0	82.0	86.0	82.0
Efficiency:	50.2	66.1	71.1	72.3	72.0	68.6	72.0
Speed:	1780.0	1766.0	1749.0	1729.0	1707.0	1675.0	1707.0
Line Amperes:	2.9	3.2	3.7	4.3	5.1	6.2	5.1

Performance Graph at 230V, 60Hz, 0.75HP Typical performance - Not guaranteed values

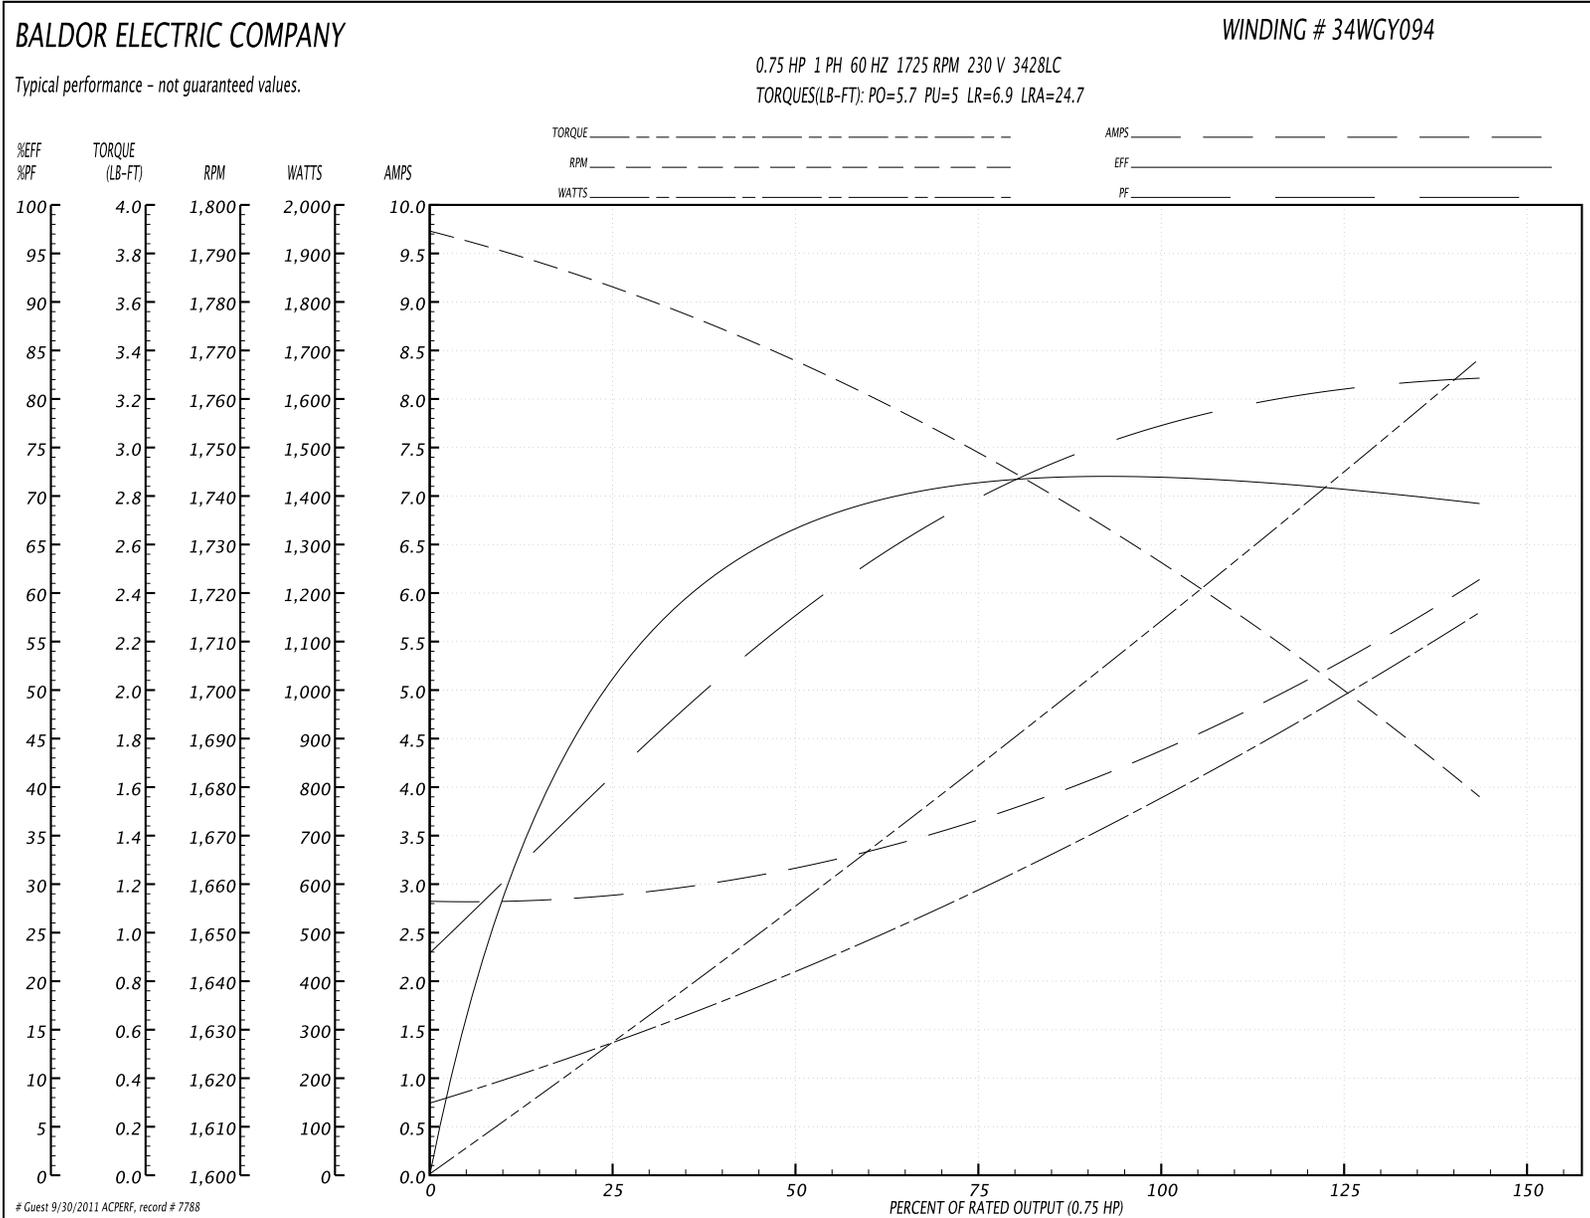


Performance Data at 115V, 60Hz, 0.56KW (Typical performance - Not guaranteed values)
General Characteristics


Full Load Torque:	3.06 N-M	Start Configuration:	DOL
No-Load Current:	5.6 Amps	Break-Down Torque:	7.73 N-M
Line-line Res. @ 25°C.:	0.79 Ohms A Ph / 1.73 Ohms B Ph	Pull-Up Torque:	6.78 N-M
Temp. Rise @ Rated Load:	71 C	Locked-Rotor Torque:	9.36 N-M
Temp. Rise @ S.F. Load:	87 C	Starting Current:	49.4 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	43.0	58.0	69.0	77.0	81.0	82.0	81.0
Efficiency:	50.5	66.3	71.1	72.4	72.0	68.5	72.0
Speed:	1780.0	1766.0	1749.0	1729.0	1707.0	1675.0	1707.0
Line Amperes:	5.81	6.4	7.4	8.61	10.2	12.4	10.2

Performance Graph at 115V, 60Hz, 0.56KW Typical performance - Not guaranteed values

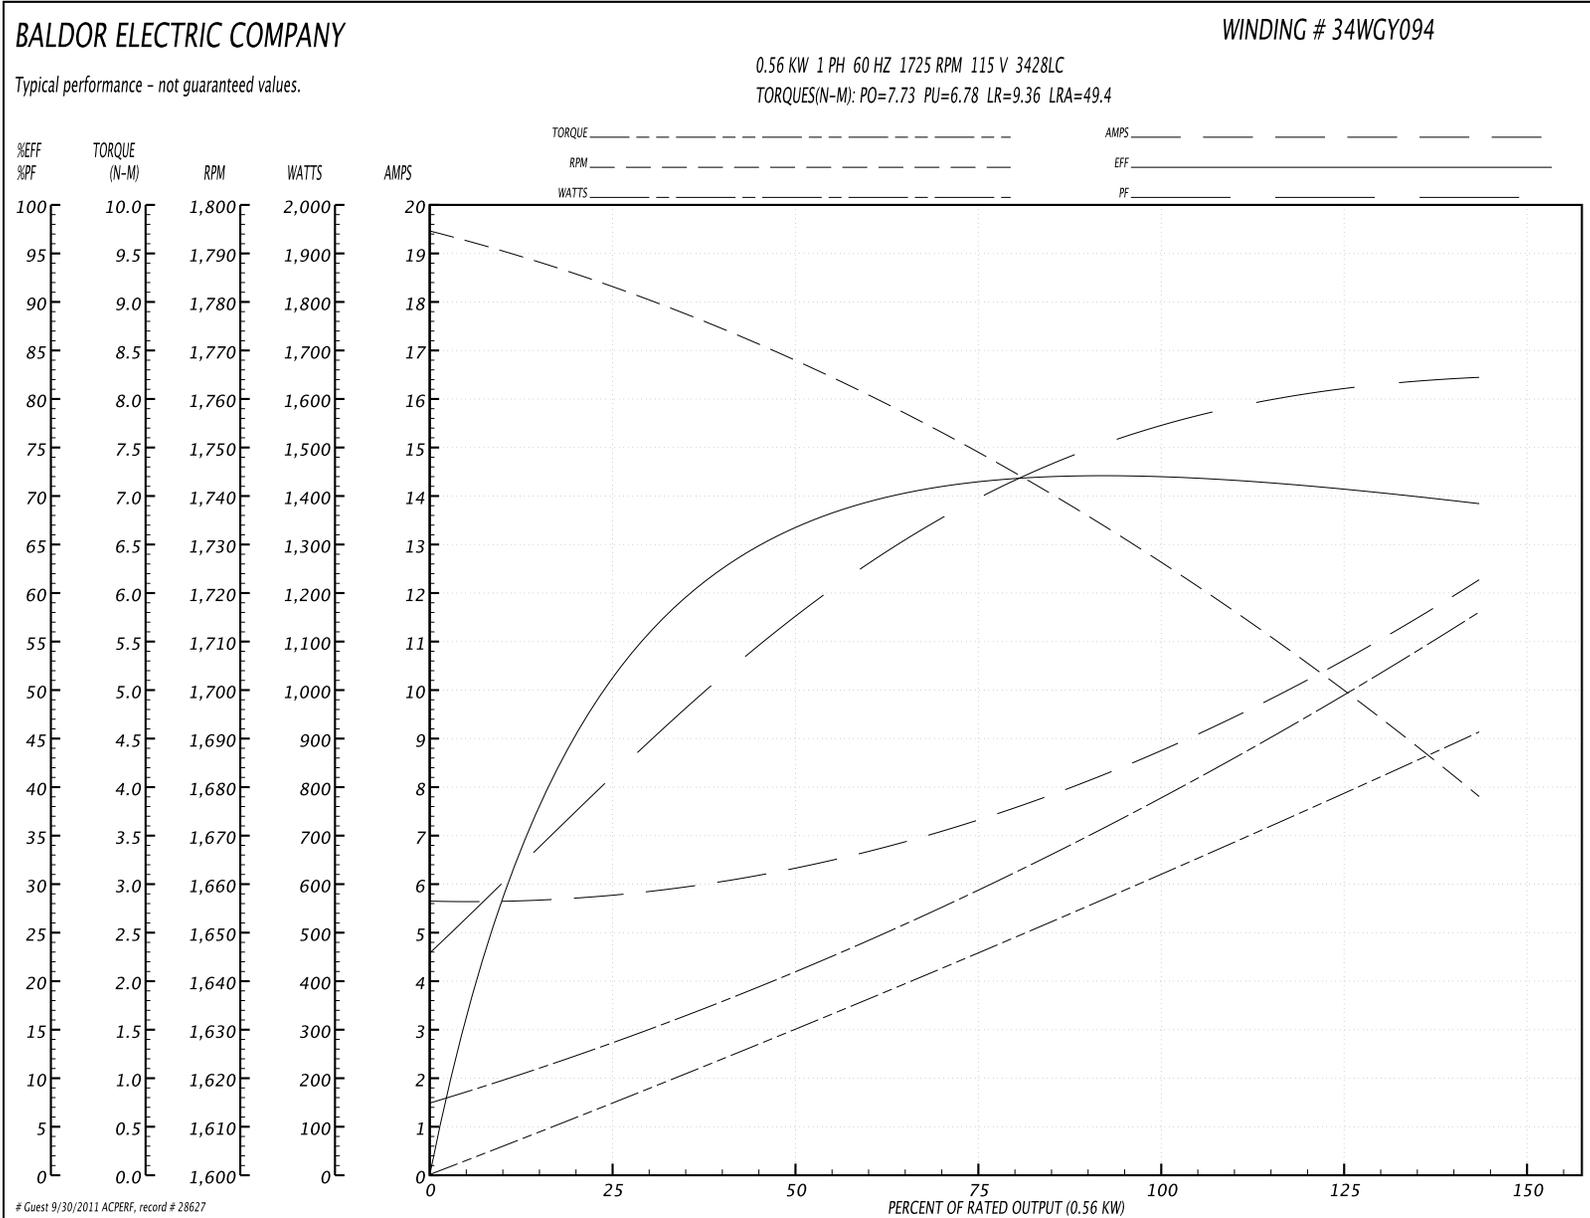

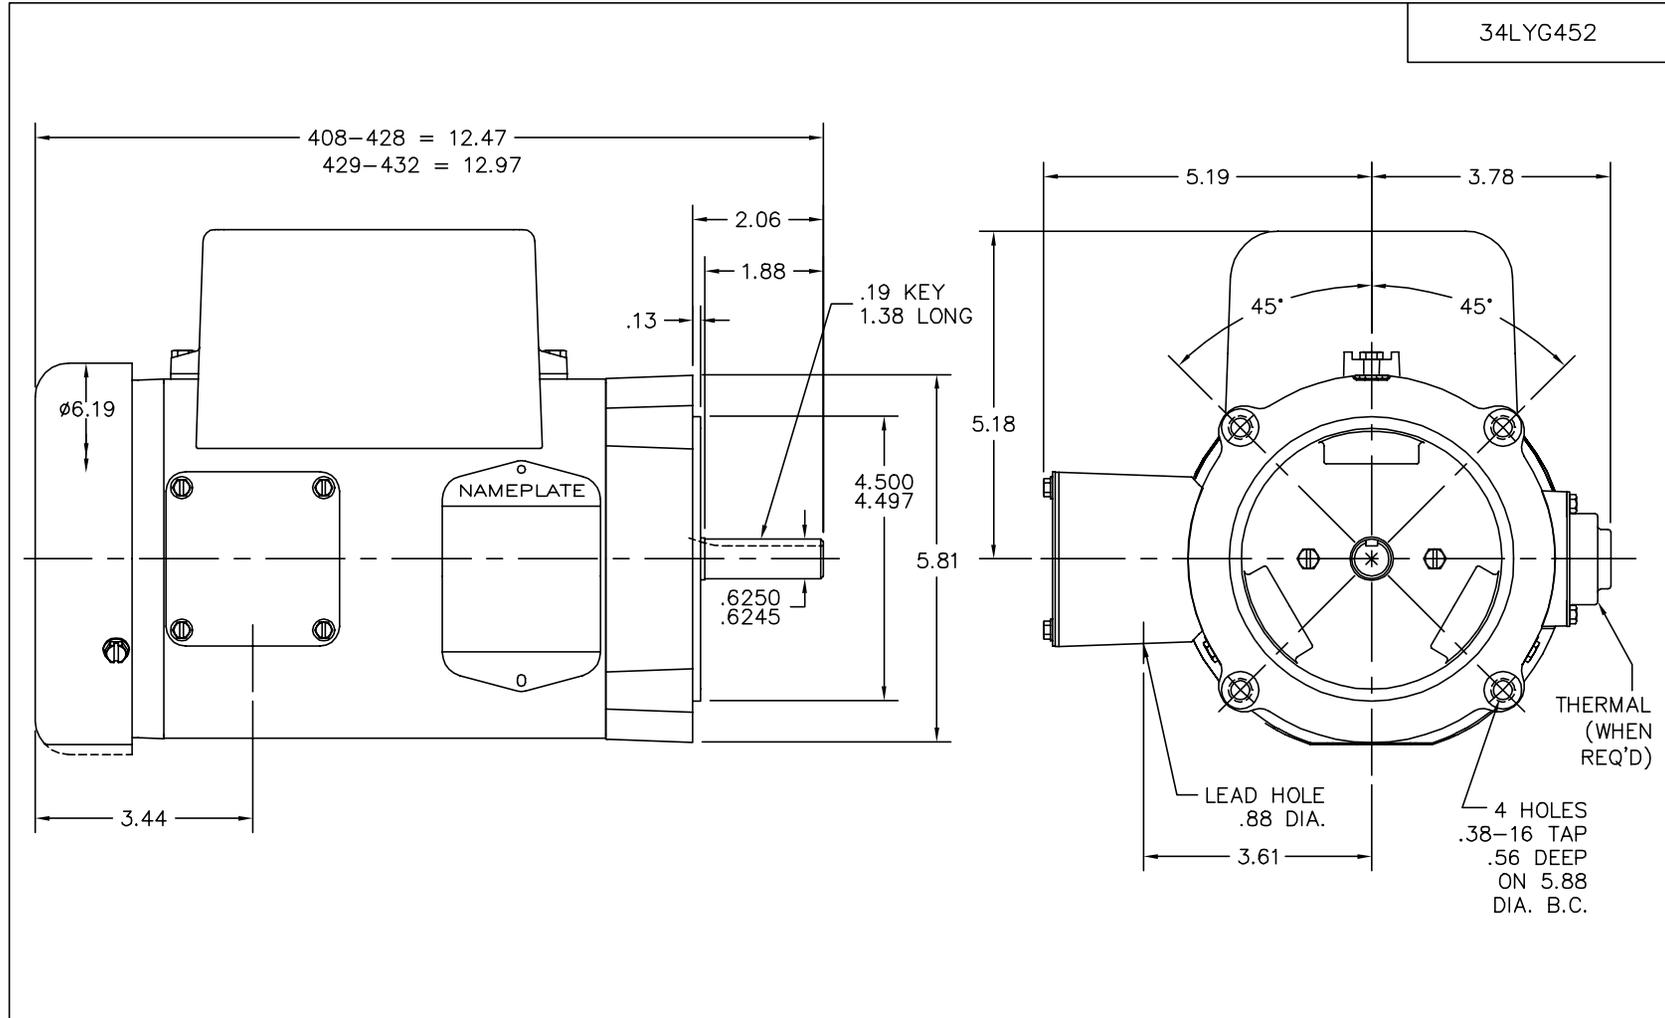

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

REV. DESC: UPDATED DRAWING

REV. LTR: C

VERSION: 01

TDR: 000000423571

BALDOR ELECTRIC Co.

FILE: \AAA\00037\636

REVISED: 14:57:38 02/26/2007


VERT 34LC NEMA 56 TEFC

MTL: -

BY: ENROSTO

34LYG452

CD0055

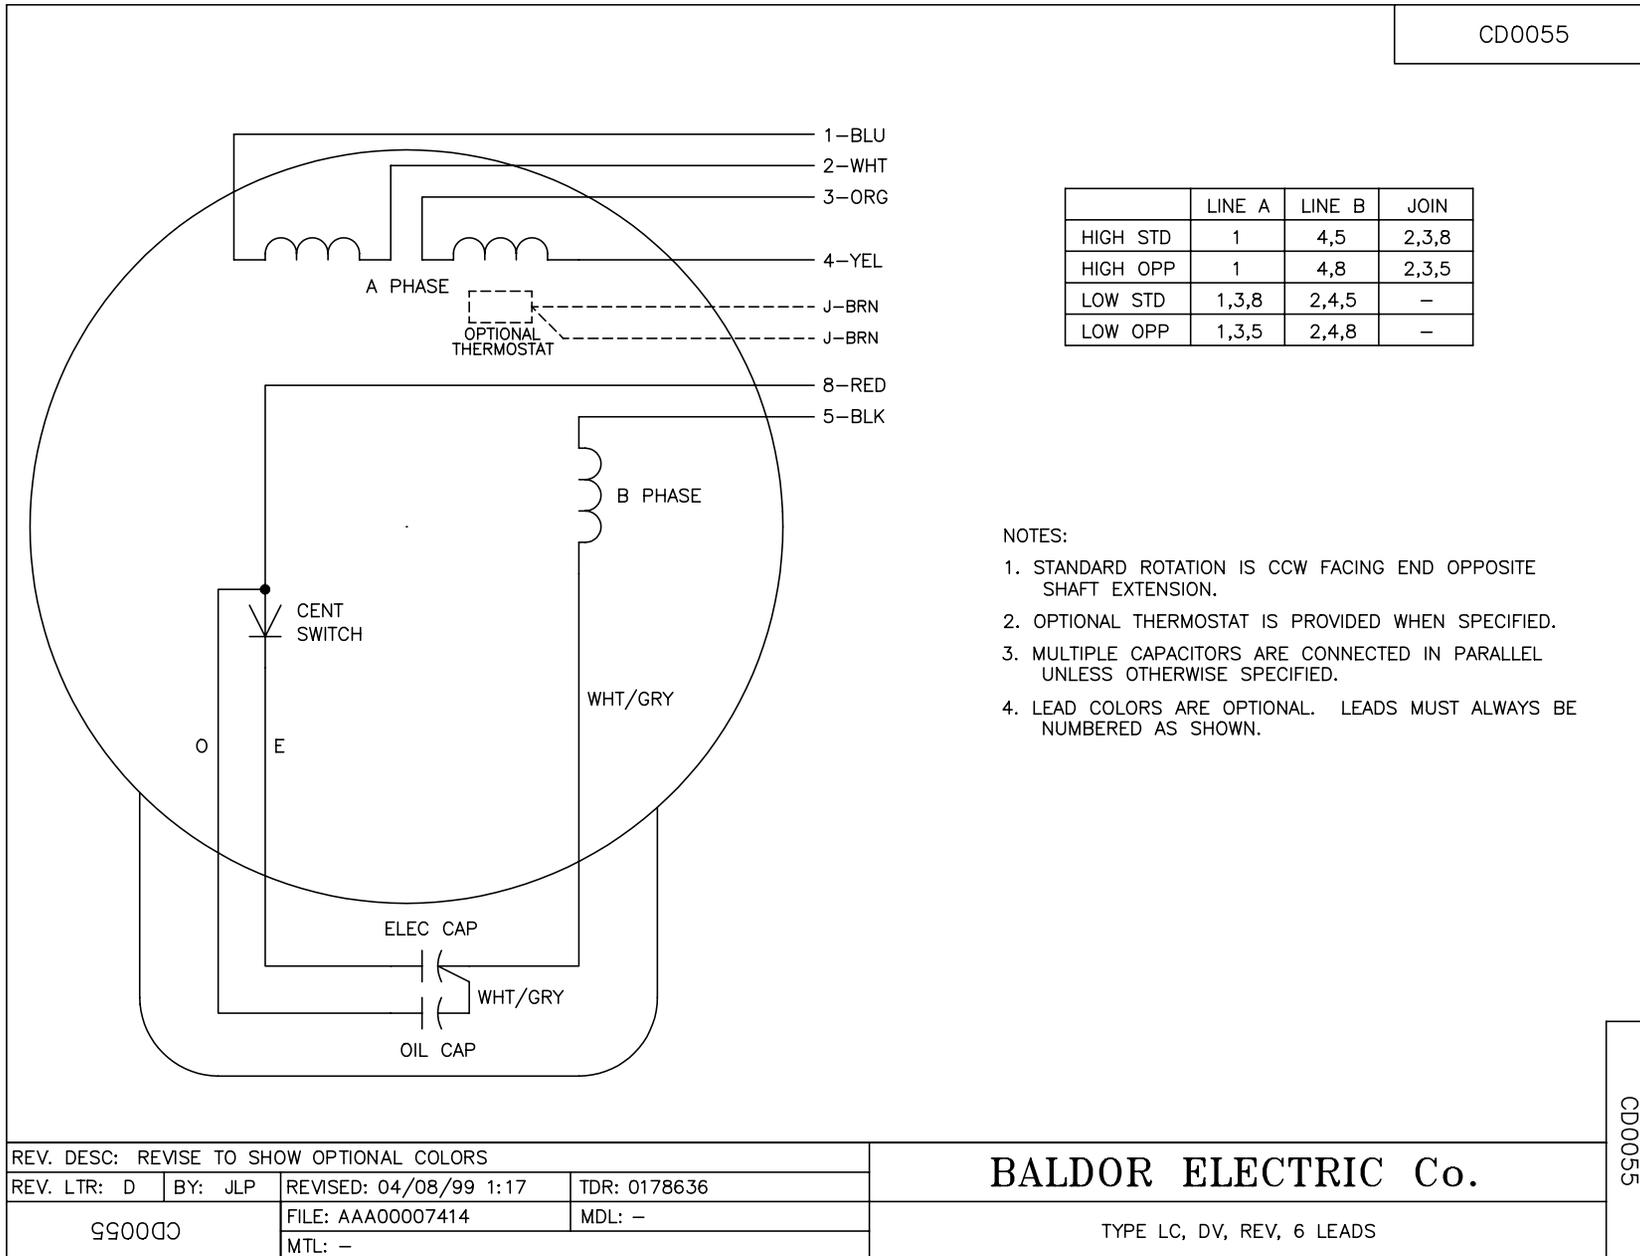

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
99000		FILE: AAA00007414	MDL: -
CD0055		MTL: -	

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, 6 LEADS

CD0055