


Grounding - Steel

Images

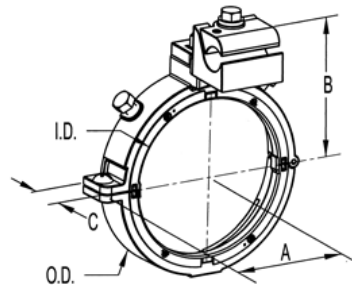

Application

Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

Product Information

Material: Steel
Finish: Zinc Plated, Grounding Lug, Tin Electro-Plate

Certifications & Codes:

Federal Specification Number: A-A-50553
NEMA Standard: FB-1
UL File Number: E20412
UL Standard: UL-514B
UNSPSC: 39121312

[Download Photo Image](#) [Download Dimensional Image](#)
Dimension A in Inches: 3.62
Dimension B in Inches: 5.12
Dimension C in Inches: 1.13
Dimension D in Inches: 6.09 O.D.
Dimension E in Inches: 4.84 I.D.

Catalog ID: SGBS-39150

UPC Number: 78174723916

Description: Split Bushing, Insulated, Grounding, Steel, Size 5 Inch, 350-500 MCM Lug

Application: Used in situations where wires have already been pulled through Rigid/IMC conduit, and an insulated bushing is required. 350 MCM - 500 MCM Aluminum Grounding lug. Rated 150 Degree C. Good for Utilities and Large Electrical Service Conduits, especially where a full size grounding wire is required.

Trade Size: 5"

Std Pkg Qty: 10

Unit Qty: -