

# SLS Series Accessories

SportsLiter Solutions

SPORTSLIGHTING

## ORDERING INFORMATION: SPORTSLITER® SYSTEM ACCESSORIES

| Catalog Number       | Description   | Weight    |
|----------------------|---|-----------|
|                      |   | lbs. (kg) |
| 4024SLS              | Slipfitter for 2" (2 3/8" OD) tenon for integral luminaires                         | 4 (1.8)   |
| 4024C <sup>4</sup>   | Slipfitter for 2" (2 3/8" OD) tenon for remote head units only                      | 4 (1.8)   |
| 4090 <sup>4</sup>    | Heavy-duty cast iron crossarm fitting for horizontal trunnion for remote heads only | 3 (1.4)   |
| SLS-V2 <sup>5</sup>  | Visor assembly 12"  | 3 (1.4)   |
| SLS-LV <sup>6</sup>  | Visor assembly 12" with external louvers  | 4 (1.9)   |
| SL-HCL <sup>3</sup>  | Half internal concentric louver   | 2 (0.9)   |
| SL-CL <sup>3</sup>   | Full internal concentric louver   | 3 (1.4)   |
| SLS-SPC <sup>1</sup> | Polycarbonate shield  | 5 (2.3)   |
| SLS-AA-REM           | Remote head aiming sight  | -         |
| FL-C3-14             | 3 ft. #14/3 SEOW-A cord   | -         |
| FL-C3-16             | 3 ft. #16/3 SEOW-A cord   | -         |
| FL-C6-14             | 6 ft. #14/3 SEOW-A cord   | -         |
| FL-C6-16             | 6 ft. #16/3 SEOW-A cord   | -         |
| SLSF                 | Field-installed single fuse holder (120, 277 & 347V)                                | -         |
| SLSFF                | Field-installed double fuse holder (208, 240 & 480V)                                | -         |
| SLS5010 <sup>2</sup> | Heavy-duty steel fitting  | 2 (0.9)   |
| SLSC                 | Safety cable for integral luminaires  | -         |
| LR-30                | Safety cable for remote yoke heads only   | -         |


- Suitable for NEMA 5/6/W beam spreads; 400-1000w only
  - Must use with SLS Series (integral ballasted) when mounting on center location of TCA-W3 & TCA-R3 style crossarm brackets
  - NEMA 2 - 6 only; Not for use with beam type N/M/W
  - For use with remote head only
  - Shipped with visor attached to lens ring assembly
  - Shipped with visor/louver attached to lens ring assembly
- Note: For other mounting accessories, see floodlight mounting accessories (page 519)



## ORDERING INFORMATION: SLS MOUNTING ACCESSORIES

| Catalog Number  | Maximum Loading  |                  | Description        | Weight lbs. (kg) | EPA ft <sup>2</sup> (m <sup>2</sup> ) |
|---|------------------|------------------|--------------------|------------------|---------------------------------------|
|   | Fixture Quantity | Weight lbs. (kg) |                    |                  |                                       |
| <b>Round Steel Pole - Crossarm Type - TCA-R Series - Clamps 3" to 5 1/2" dia.</b> |                  |                  |                    |                  |                                       |
| TCA-R2  | 2                | 210 (95.3)       | For two fixtures   | 28 (12.7)        | .8 (0.1)                              |
| TCA-R3 <sup>1</sup>   | 3                | 315 (142.9)      | For three fixtures | 70 (31.7)        | 1.6 (0.2)                             |
| TCA-R4  | 4                | 420 (190.5)      | For four fixtures  | 106 (48)         | 2.5 (0.2)                             |
| <b>Wood Pole - Crossarm Type - TCA-W Series - Thru or Lag Bolt (Not Included)</b> |                  |                  |                    |                  |                                       |
| TCA-W2  | 2                | 210 (95.3)       | For two fixtures   | 21 (9.5)         | 1 (0.1)                               |
| TCA-W3 <sup>1</sup>   | 3                | 315 (142.9)      | For three fixtures | 80 (36.3)        | 1.8 (0.2)                             |
| TCA-W4  | 4                | 420 (190.5)      | For four fixtures  | 106 (48)         | 2.4 (0.2)                             |

- One SLS5010 mounting bracket included
- Note: Galvanized available, add suffix -M38

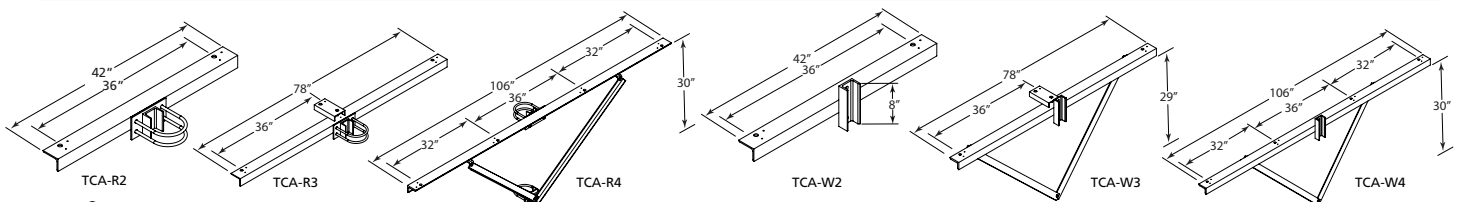

SPORTSLITER SOLUTIONS