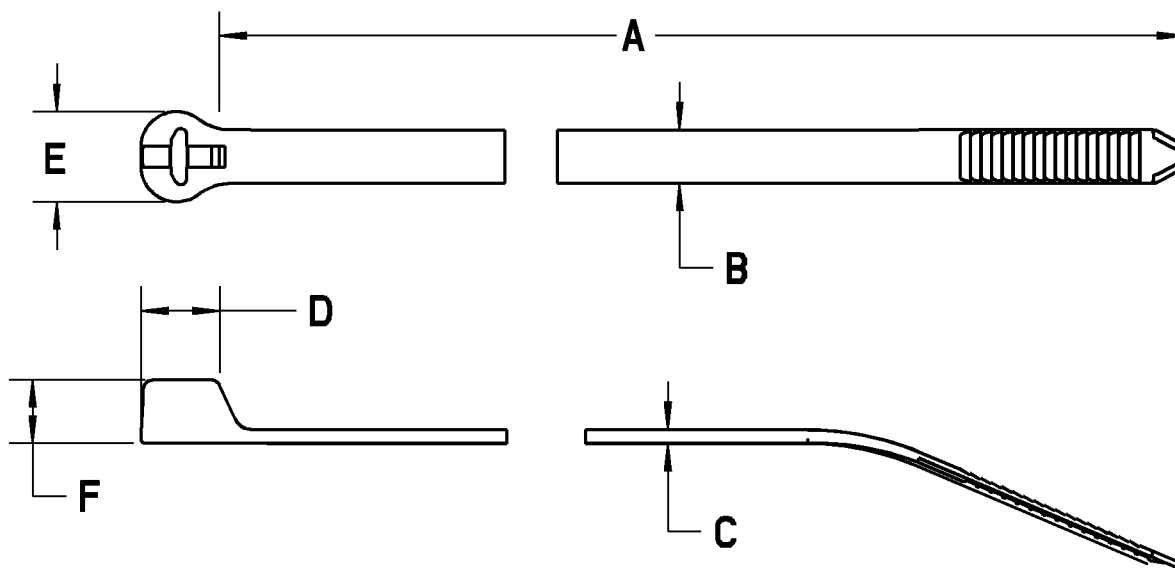


**Ty-Rap****NOTES.**

1. MATERIAL: NYLON HEAT STABILIZED, UV RESISTANT.
2. COLOR: BLACK
3. CONTINUOUS OPERATING TEMPERATURE: (-40°F / -40°C) - (221°F / 105°C)
4. FLAMABILITY: UL94 V-2

TY28MX-A	50/222	14.20 [360.68]	.188 [4.77]	.050 [1.27]	.263 [6.68]	.315 [8.00]	.220 [5.89]	4.00 [102.0]
TY27MX-A	120/540	13.4 [340]	.270 [6.86]	.063 [1.60]	.360 [9.14]	.480 [12.2]	.320 [8.13]	3.50 [89.0]
TY25MX-A	50/220	7.31 [186]	.188 [4.77]	.048 [1.22]	.250 [6.35]	.315 [8.00]	.220 [5.89]	1.75 [44.4]
TY24MX-A	40/178	5.50 [140]	.140 [3.56]	.042 [1.07]	.156 [3.96]	.250 [6.35]	.180 [4.51]	1.125 [28.6]
TY23MX-A	18/80	3.62 [91.9]	.092 [2.34]	.036 [0.91]	.130 [3.30]	.185 [4.70]	.153 [3.88]	.625 [15.9]

CAT. NO.	TENSILE (LBS/N)	A	B	C	D	E	F	MAX BUNDLE
----------	--------------------	---	---	---	---	---	---	---------------

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

- | | |
|---|---|
| 1 | SEE ERN 2013834 FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: FM401183 |
|---|---|

Thomas & Betts
www.tnb.com

DESCRIPTION:

TYMX-A SERIES HS/UV
TY-RAP CABLE TIES**

ORIGINAL PROJECT NO / (ERN NO)

FM401181 / (2005322)

SHEET NO:

1 OF 1

REV. NO:

1

DRAWING NO:

WSD-000157