





NXSW-OO



NXSW-ORLO



NXSW-SS



NXSW-RL



NXSW-TO

Project Name _____


Catalog No. _____ Date _____

NX Specialty Switch Wall Stations provide manual control of the NX System. The NX Specialty Switch Stations include an On/Off switch, an On/Raise/Lower/Off switch, a Scene Switch with 4 presets plus Raise/Lower, a Raise/Lower dimmer switch and a Timed On switch. All Switch Stations provide plug and play integration with the NX SmartPORT™. Fits Standard Decorator Style Wallplate (sold separately).

Product Features

- Attractive, architecturally-pleasing decorator style design
- Custom button cap engraving available
- Multiple switch options available
- All switches mount to standard single or multi-gang wall boxes
- Plug and play integration with NX Room Controller
- Five-year limited warranty
- Low voltage device: 24VDC
- Delivers simplified configuration and control of Hubbell Lighting luminaires using SpectraSync™ color tuning technology

Dimensional Data

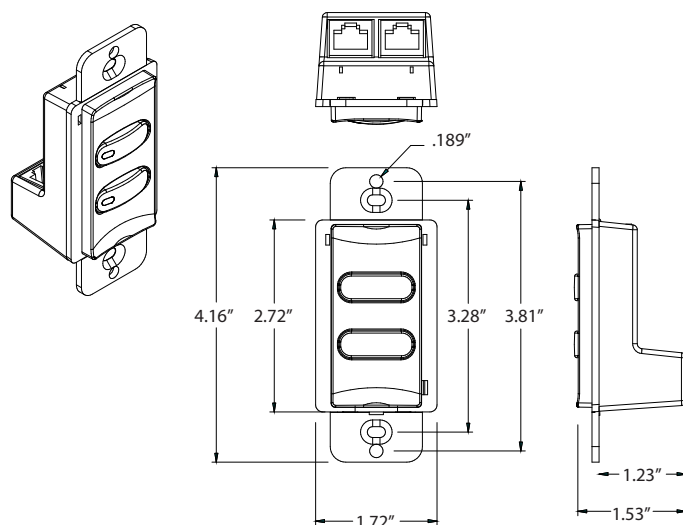

Ordering Information

NXSW				
MODEL	SWITCH TYPE		COLOR	
NX Specialty Switch	OO On/Off	Blank	White	
	ORLO On/Raise/Lower/Off	IV	Ivory	
	RL Raise/Lower	LA	Light Almond	
	TO Timed On	GY	Gray	
	SS Scene	BK	Black	
		RD	Red*	


* Special order only

Ordering Information

CAT5 System Cables

MODEL/DESCRIPTION	
CAT5-3F-OR-PLENUM	CAT5 Cable for NX SmartPORT Devices, Plenum Rated, 3ft, Orange
CAT5-10F-OR PLENUM	CAT5 Cable for NX SmartPORT Devices, Plenum Rated, 10ft, Orange
CAT5-25F-OR PLENUM	CAT5 Cable for NX SmartPORT Devices, Plenum Rated, 25ft, Orange
CAT5-50F-OR PLENUM	CAT5 Cable for NX SmartPORT Devices, Plenum Rated, 50ft,Orange
CAT5-100F-OR PLENUM	CAT5 Cable for NX SmartPORT Devices, Plenum Rated, 100ft, Orange

Wiring Diagrams

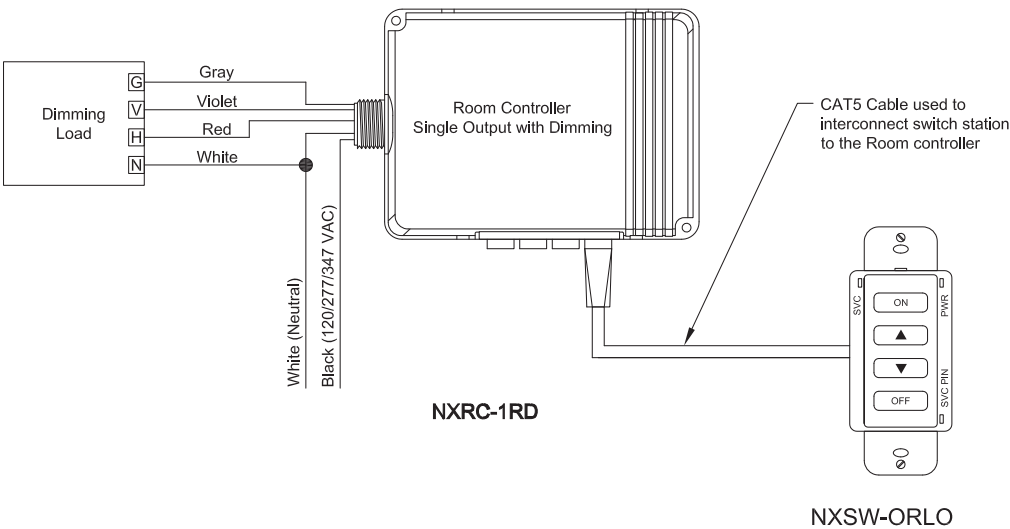

General Specifications

Addressing	Eight position rotary switch
Power Requirements	Powered by NX SmartPORT using plenum rated CAT5 cables (ordered separately)
Standby Power (W)	120VAC: 0.1 277VAC: 0.1 347VAC: 0.4
Operating Environment	Indoor use only Operating Temperature: 32°F to 104°F [0°C to 40°C] Relative humidity (non-condensing): 0 to 95%
Construction	Housing - Rugged, high impact, injection molded plastic
Dimensions	4.2"L [106.68mm] x 1.6"W [40.64mm] x 1.4"D [35.56mm]
Weight	1.6 oz [45.34 g]
Color	White, Ivory, Light Almond, Gray, and Black