


Heavy duty grade armored vinyl plugs & connectors

Product description

2-pole, 3-wire grounding
15A, 125V/AC
20A, 125V/AC

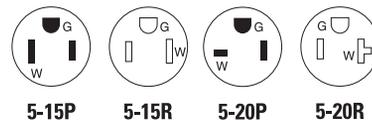

2867

Design features

- Armored housing resists abuse and is automatically grounded
- Solid brass plug blades are firmly embedded in body
- Terminals in individual chambers to positively insulate conductors
- Terminal screws backed out and ready for wiring
- Terminal screw clamps are designed to contain wire and prevent binding
- Combination Slot/Phillips head mounting and terminal screws for installation flexibility (Slot/Robertson screws in Canada where available)

Armored vinyl plugs & connectors



| Rating A | V/AC | Description | Cord diameter | Color | Plug catalog no. | Connector catalog no. | USA | RoHS |
|----------|------|--------------------------|-------------------------|-------|------------------|-----------------------|-----|------|
| 15 | 125 | NEMA 5-15, straight body | 0.25-0.63" (6.4-16.0mm) | Y | □ 2867 | □ 2887 | • | • |
| 20 | 125 | NEMA 5-20, straight body | 0.25-0.63" (6.4-16.0mm) | Y | □ 2809 | □ 2228 | • | • |

Listed to UL498, file no. E15012; CSA certified to C22.2, no. 42; NOM certified




2227

Heavy duty grade armored vinyl plugs & connectors

Product description

2-pole, 3-wire grounding
15A, 250V/AC
20A, 250V/AC

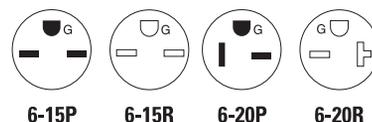

Design features

- Armored housing resists abuse and is automatically grounded
- Solid brass plug blades are firmly embedded in body
- Terminals in individual chambers to positively insulate conductors
- Terminal screws backed out and ready for wiring
- Terminal screw clamps are designed to contain wire and prevent binding
- Combination Slot/Phillips-head mounting and terminal screws for installation flexibility (Slot/Robertson screws in Canada where available)

Armored vinyl plugs & connectors



| Rating A | V/AC | Description | Cord diameter | Color | Plug catalog no. | Connector catalog no. | USA | RoHS |
|----------|------|--------------------------|-------------------------|-------|------------------|-----------------------|-----|------|
| 15 | 250 | NEMA 6-15, straight body | 0.25-0.63" (6.4-16.0mm) | Y | □ 2866 | □ 2227 | • | • |
| 20 | 250 | NEMA 6-20, straight body | 0.25-0.63" (6.4-16.0mm) | Y | □ 3809 | □ 2229 | • | • |

Listed to UL498, file no. E15012; CSA certified to C22.2, no. 42; NOM certified

Color ordering information:

Y (Yellow)



(Yellow)

Dimensional information: B-70 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page G-21



RoHS compliant - Page G-21