

Scheduling Devices
Count Down Digital
Wall Switch Timers

HUBBELL

Features

- Enabled preset intervals, ON / OFF momentary pushbutton switch feature
- Configurable audible alert before turning OFF
- Adjustable to up to 4 hours
- 3-Way capable
- Designed for use on 120 or 277V AC circuits



Ordering Information


Description	UPC Number	Catalog Number
User adjustable up to 4 hours, 3-Way capable Includes an ON/OFF push button	783585413020	DT2000W

Listings

cULus listed to UL 773A
 Meets ASHRAE 90.1, and CEC Title 24 compliant

Specifications

Housing	Polycarbonate
Mounting Bracket	Aluminum
Wire Leads	6" 14AWG copper wire
Mounting Strap	Steel

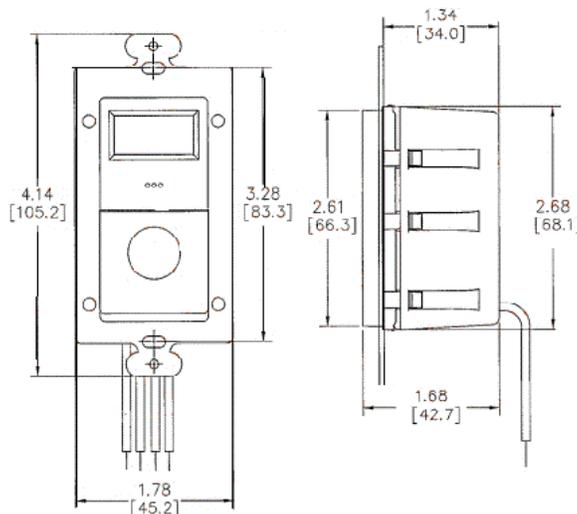

Performance

Controls	
5 button selection	Preset time selection
LED Indicators	Illuminates once time is selected
OFF Switch	6 seconds to 20 minutes (default set to 10 minutes)

Electrical	
Load Capacity	120VAC, 600W Incandescent, 5A Ballast, 5A CFL/LED, 277V; Horsepower rating 1/6

Environmental	
Operating Temperature	32°F to 104°F (0°C to 40°C) with rate of change not exceeding 20°F(11°C) per hour
Storage	-40°F to 150°F (-40°C to 65°C); 20% to 90% non condensing relative humidity

Complementary Products

Nylon Wallplate	NP26W
SS Wallplate	SS26
Snap-On Wallplate	NPS26W

Online Resources

Customer Use Drawing
 eCatalog
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

