

GU Conduit Outlet Boxes

Explosionproof, Dust-Ignitionproof

UNILETS® for use with Threaded Metal Conduit. Furnished with Internal Ground Screw.

Class I, Division 1 and 2, Groups B♦, C, D
 Class II, Division 1 and 2, Groups E, F, G
 Class III
 NEMA 3,4

Enclosures and Junction Boxes

ENCLOSURES AND JUNCTION BOXES: HAZARDOUS LOCATION CONDUIT OUTLET BOXES

Applications

- Complies with a wide range of classified area requirements.
- Corrosion-resistant: ideal indoors or out.
- For pulling of wires.
- Connect conduit lengths and change direction of conduit runs.
- Provide access for maintenance.

Features

- Malleable iron bodies have high tensile strength and ductility. Provides great resistance to corrosion, impact, and shock.
- Accurately tapped, tapered hub threads for tight, rigid joints and ground continuity.
- Furnished with covers and cover gasket.
- General purpose wiring.
- Designed for Class I, Groups B, C, D; Class II, Groups E, F, G; and Class III.
- Externally threaded body with internally threaded cover.
- Smooth, rounded integral bushing in each hub type box protects conductor insulation.
- Internal ground screw standard.

Standard Materials






- Bodies and covers: malleable iron

Standard Finishes

- Bodies and covers: triple-coat — (1) zinc electroplate, (2) chromate, and (3) epoxy powder coat


Certifications and Compliances

- UL Standard: UL 886 (UL 1203)
- UL Listed: E10444
- CSA Standard: C22.2 No. 25, C22.2 No. 30
- CSA Certified: 025875

	Hub Type	Conduit Size (Inches)	Cover Opening in/mm	Capacity in ³ /dm ³	Catalog Number ♦
	GUC	1/2	3.38/98.6	19.0/0.31	GUC50
		3/4	3.38/98.6	19.0/0.31	GUC75
		1	3.38/98.6	19.0/0.31	GUC100
	GUL	1/2	3.38/98.6	19.0/0.31	GUL50
		3/4	3.38/98.6	19.0/0.31	GUL75
		1	3.38/98.6	19.0/0.31	GUL100
	GULB	1/2	3.38/98.6	19.0/0.31	GULB50
		3/4	3.38/98.6	19.0/0.31	GULB75
		1	3.38/98.6	19.0/0.31	GULB100
	GUT	1/2	3.38/98.6	19.0/0.31	GUT50
		3/4	3.38/98.6	19.0/0.31	GUT75
		1	3.38/98.6	19.0/0.31	GUT100
	GUX	1/2	3.38/98.6	19.0/0.31	GUX50
		3/4	3.38/98.6	19.0/0.31	GUX75
		1	3.38/98.6	19.0/0.31	GUX100

Dimensions

Hub Size (Inches)	Dimensions in Inches/Millimeters					
	A	B	C	D	E	F
1/2	4.28/108.7	2.44/62.0	2.97/75.4	0.75/19.1	0.81/20.6	2.25/57.2
3/4	4.28/108.7	2.44/62.0	2.97/75.4	0.75/19.1	0.81/20.6	2.25/57.2
1	4.28/108.7	2.44/62.0	2.97/75.4	0.94/23.9	0.94/23.9	2.25/57.2

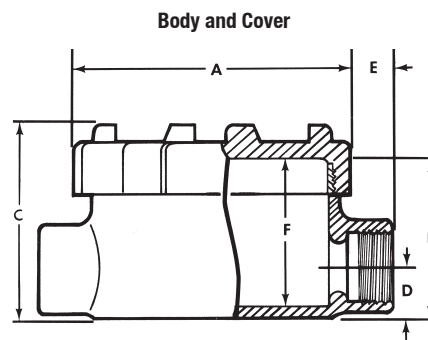

♦ In Class I, Division 1, Group B atmospheres, all conduit runs must have a sealing fitting (not supplied) field-installed adjacent to the enclosure.