

## Beam Clamps and Hanger Rod Supports

### 512-U Channel to Beam Clamp

Secures all sizes of Kindorf® channel to beams where flange edge does not exceed .8" thickness.


CAT. NO.	DESIGN LOAD (LBS.)	WT. LBS./C
512-U	500	25

Load rating each clamp 800 lbs. with a safety factor of 3.

Assembly requires one H-113-E bolt and one B-910-1/2 steel nut per clamp — order separately.

1/4" steel.

Galv-Krom® finish.

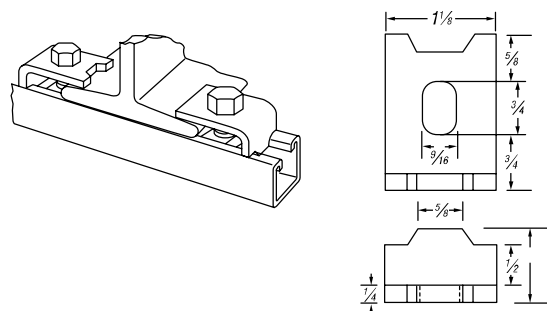


### E-764 Channel Clip

Complete with set screw for clipping a length of channel slot-side down and across the runner bars of a dropped ceiling installation.

CAT. NO.	WT. LBS./C
E-764	4

At least two required per each such application.

Galv-Krom® finish.

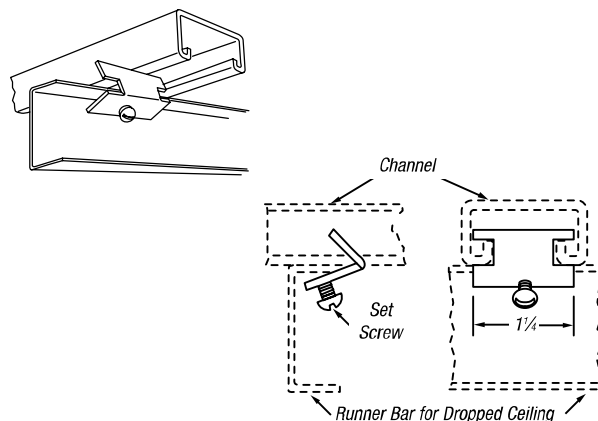

### E-765 Center Beam Clamp

Clamps 1 1/2" x 1 1/2" Kindorf® channel to beams where beam flange does not exceed 3/4" thickness and 4" to 6 3/4" wide.

CAT. NO.	LOAD RATING (LBS.)	WT. LBS./C
E-765	800	112

Load rating is 800 lbs. with a safety factor of 3.

Furnished assembled.

1/2" steel clamps, 3/16" steel strap.

Galv-Krom® finish.

