



# T5 Preheat

## F4T5/CW PH 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

### Product data


General Information		Voltage (Nom)	
Cap-Base	G5 [ G5]		29 V
Life to 10% Failures (Nom)	5000 h	Controls and Dimming	
Life to 50% Failures (Nom)	10000 h	Dimmable	Yes
Life to 50% Failures Preheat (Nom)	10000 h	Approval and Application	
System Description	na [-]	Energy Efficiency Label (EEL)	B
		Mercury (Hg) Content (Nom)	4.4 mg
		Energy Consumption kWh/1000 h	5 kWh
Light Technical		Product Data	
Color Code	33-640	Order product name	F4T5/CW PH 25PK
Initial lumen (Nom)	140 lm	EAN/UPC - Product	046677332365
Color Designation	Cool White (CW)	Order code	332361
Lumen Maintenance 10000 h (Nom)	58 %	Numerator - Quantity Per Pack	1
Lumen Maintenance 2000 h (Nom)	70 %	Numerator - Packs per outer box	25
Lumen Maintenance 5000 h (Nom)	70 %	Material Nr. (12NC)	928000003321
Correlated Color Temperature (Nom)	4100 K	Net Weight (Piece)	14.000 g
Luminous Efficacy (rated) (Nom)	35 lm/W	ILCOS Code	FD-4/41/2B-E-G5
Color Rendering Index (Nom)	60		
Operating and Electrical			
Power (Rated) (Nom)	4 W		
Lamp Current (Nom)	0.170 A		

### Warnings and Safety

- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

# T5 Preheat



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
F4T5/CW PH 25PK	16 mm	135.9 mm	143.0 mm	140.6 mm	150.1 mm

TL Mini 4W/33-640

## Photometric data

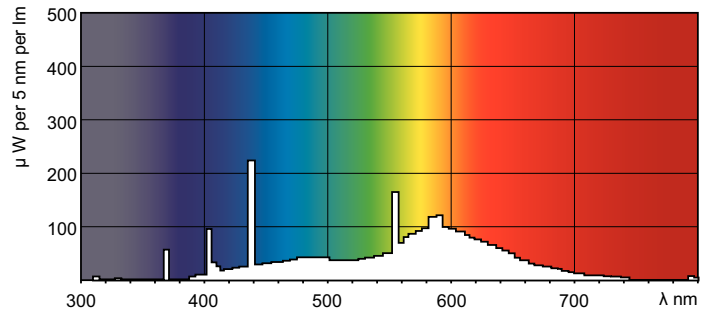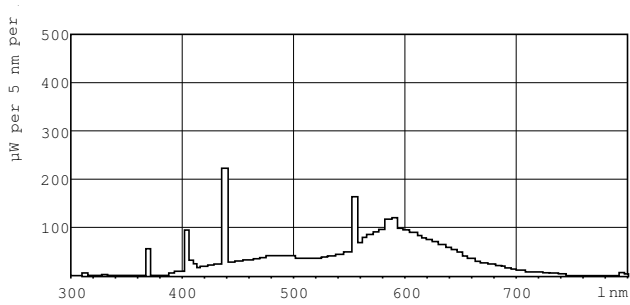

Lightcolor /33-640

Lightcolor /33-640

