

EASY-TWIST™

Crimp Sleeve & Nylon Wire Connectors

SB, TOP & C-N SERIES

FEATURES

- **COPPER CRIMP SLEEVES:** Bullet is designed for easy installation and provide an exceptional connection.
- **CLOSED END CONNECTORS:** Made from nylon 6/6 (Polyimide 66).
- **STEEL CRIMP SLEEVES:** Economical, brass-plated steel provides an excellent low resistance connection.
- UL 94V-2 self extinguishing, closed end style.

CERAMICS

- Made of high quality ceramics.
- Have excellent electrical and heat resistant properties.
- Maximum working temperature of 1,000 °F.
- For applications above 200 °F.
- Uses include appliances, high powered lighting fixtures, ceiling fans, heaters, plastic extrusion/injection molding barrels and similar high temperature applications.

RATINGS



LISTED
WIRE CONNECTOR



231168

Part # SB is UL Listed

Part # C-N and C-N-B are

UL and CSA Listed

TEMPERATURE RATING:

C-N Series 105 °C (221 °F)

TOP Series 93.3333 °C (200 °F)


Example: (100) (10X100) =

100 in standard package,
1000 in standard carton.




COLOR / TYPE	WIRE RANGE
Copper Crimp Sleeve	18-10 AWG
Copper Crimp Sleeve	18-8 AWG
Steel Crimp Sleeve	18-10 AWG
Steel Crimp Sleeve	14-8 AWG
Ceramic, White	22-14 AWG
Ceramic, White	22-10 AWG
Ceramic, White	18-8 AWG
Nylon, Clear	22-18 AWG
Nylon, Clear	22-14 AWG
Nylon, Clear	22-10 AWG
Nylon, Clear	16-10 AWG


TOP-L

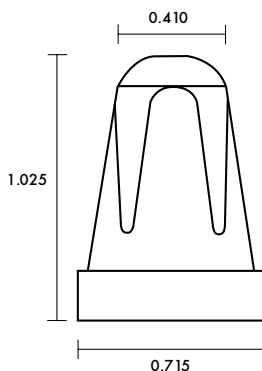

TOP-M




TOP-S



Scan QR code for mobile access
to wire combinations.



MAX VOLTAGE	BLISTER PACK	CARTON	BAG
—	SB1810 (100) (10x100)	—	SB1810-B (1000) (10x1000)
—	SB1808 (50) (10x50)	—	SB1808-B (500) (10x500)
—	SB1810S (100) (10x100)	—	SB1810S-B (1000) (10x1000)
—	SB1408S (50) (10x50)	—	SB1408S-B (500) (10x500)
—	TOP-S-D (15) (15x25)	TOP-S-CD (100) (10x100)	—
—	TOP-M-D (15) (15x25)	TOP-M-CD (100) (10x100)	—
—	TOP-L-D (15) (15x25)	TOP-L-CD (100) (10x100)	—
300V	—	C22-N (100) (18x100)	C22-N-B (1000) (30x1000)
300V	—	C16-N (100) (12x100)	C16-N-B (1000) (20x1000)
300V	—	C12-N (50) (12x50)	C12-N-B (1000) (10x1000)
300V	—	C8-N (40) (12x40)	C8-N-B (500) (12x500)

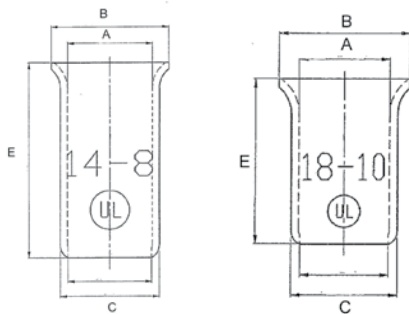

All Dimensional Data is listed in inches.

CAT. NO.	I.D. (A)	MAX. SKIRT ENTRY (B)	MAX. WIDTH (C)	MAX. SKIRT DEPTH (D)	LENGTH/ HEIGHT (E)
SB1810	0.204	0.295	0.240	n/a	0.374
SB1808	0.263	0.364	0.307	n/a	0.610
C22-N	0.102	0.244	0.307	0.236	0.709
C16-N	0.118	0.311	0.374	0.276	0.787
C12-N	0.173	0.413	0.492	0.378	1.004
C8-N*	0.209	0.488	0.563	0.472	1.091