

Material

- Single function.
- KOHLER finishes resist corrosion and tarnishing.
- MasterClean™ sprayface is easy to clean.
- Requires shower hose (sold separately).
- 2.5 gal/min (9.5 l/min) flow rate.
- Complements Kelston® faucet line.
- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.
- Single-function handshower delivers a full, consistent spray, regardless of water pressure.
- MasterClean™ sprayface is easy to clean.
- 2.5 gpm (gallons per minute) flow rate.
- Requires K-8593 or K-9514 shower hose (sold separately).
- Coordinates with Kelston faucets and accessories.
- KOHLER finishes resist corrosion and tarnishing.
- Bracket or slidebar required for wall-mount installation.
- Deck-mount holder required for deck-mount installation.

Required Products/Accessories

K-8593 72" Shower Hose

or

K-9514 60" Shower Hose



OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992







OBC



KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	BRZ	Oil-Rubbed Bronze
	2BZ	Oil-Rubbed Bronze

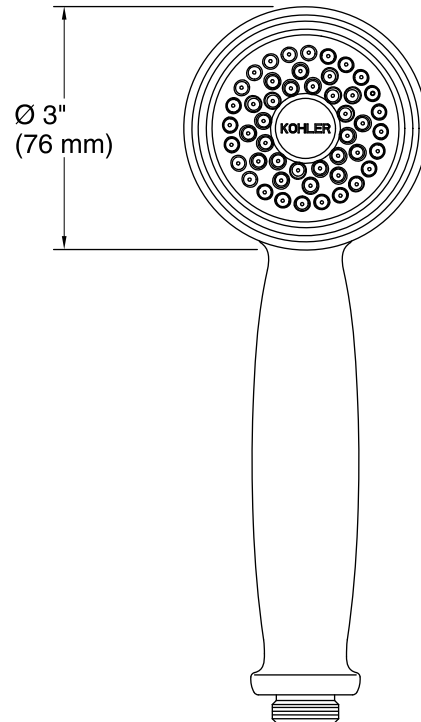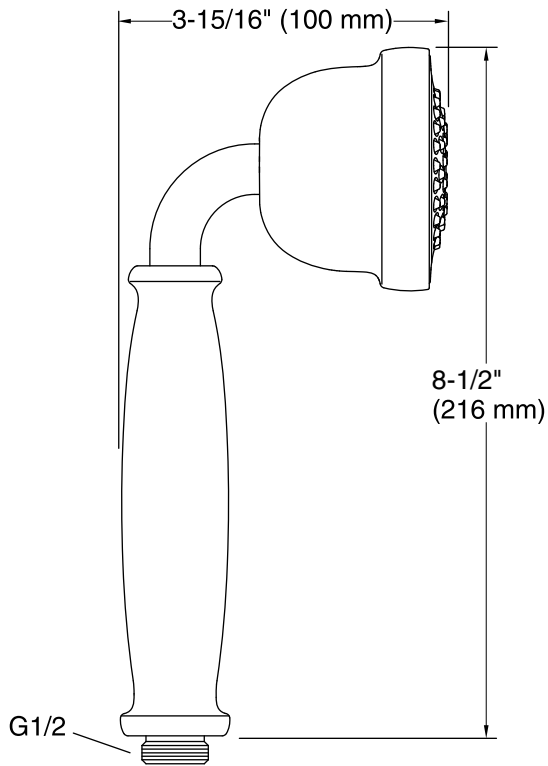

Technical Information

All product dimensions are nominal.

Notes

For use with automatic compensating valves rated at 2.5 gal/min (9.5 l/min) or less.

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

OBC compliant when installed to the specific requirements of these regulations.