

Features

- Performance showering packages offer increased functionality and simplify the ordering process.
- Single lever handle provides on/off activation and temperature setting with a single operation.
- Multifunction showerhead offers wide coverage, therapeutic massage, and soft aerated spray settings.
- Multifunction handshower offers wide soft coverage, soft pulse, and soft aerated spray settings.
- Includes handshower, showerhead, showerarm with diverter, shower hose, sidebar kit, and Rite-Temp valve trim.
- Coordinates with Fairfax® faucets and accessories.
- KOHLER finishes resist corrosion and tarnishing.

Installation

- Wall-mount
- Trim only; requires K-304 Rite-Temp pressure-balancing valve (sold separately).

Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits

or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins

K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

Included Components

Product consists of:

K-9514 60" Shower Hose
K-9511 Showerarm and Diverter
K-8524 30" Sidebar
K-12009 Multi-function Showerhead
K-T12021-4 Rite-Temp® Valve Trim
K-349 Sidebar Trim Kit
1055527 Handshower Relaxing



Codes/Standards

ASME A112.18.1/CSA B125.1




DOE - Energy Policy Act 1992


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze

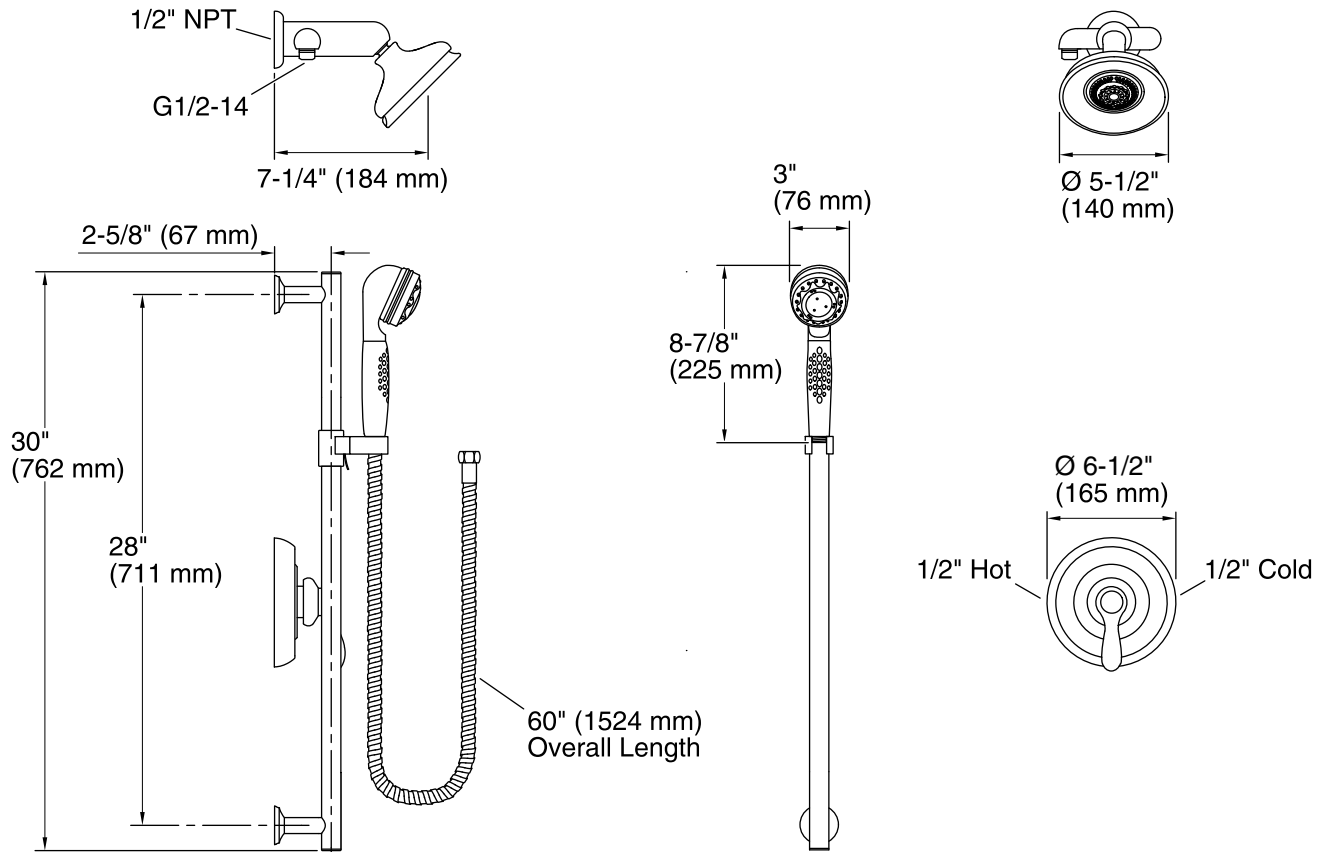

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Pressure: 80 psi (5.5 bar)

Notes

Install this product according to the installation guide.

Install the Rite-Temp® valve according to the valve installation guide.