

Windward®

5' Bath **K-1113-F**



Features

- Decked oval shape creates a graceful and spacious bathing experience.
- Molded lumbar support and armrests offer extra comfort.
- Four-sided integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- End drain.

Material

Acrylic

Installation


Alcove

Additional Hydrotherapy Options

- Soaking Bath 1113-F
- BubbleMassage air bath 1112-GF
- Whirlpool 1112-F
- Whirlpool + heater 1112-FH

Recommended Products/Accessories

K-11677 Bath Drain
K-7166-AF Bath Drain
K-24916 Wireless Music Kit
K-1491 Bath/Whirlpool Pillow
K-1601 Bath/Whirlpool Footstop
K-7213 27" Cable Bath Drain
K-7214 27" Cable Bath Drain
K-7265 Clearflo Bath Drain



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond




KOHLER®

Windward®


5' Bath **K-1113-F**


No change in measurements if connected with drain illustrated. (K-11677)


Recommended Faucet Location



Tile Flange Detail

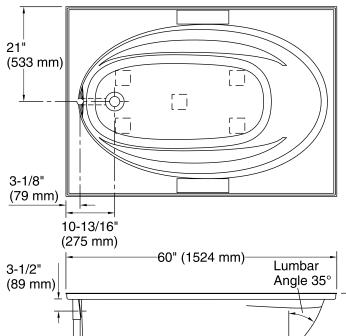

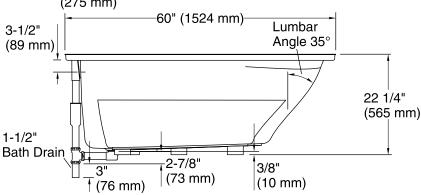

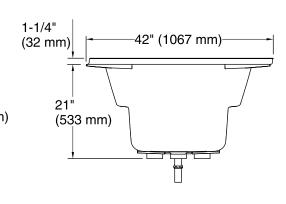

Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: End

Basin area, bottom: 41" x 20-1/2" (1041 mm x 521 mm)
Basin area, top: 53-1/2" x 32-1/8" (1359 mm x 816 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 35 lbs/ft² (170.9 kg/m²)

Water depth: 15" (381 mm)
Water capacity: 57 gal (215.8 L)

Cutout: Drop-in, 58-1/2" x 40-1/2" (1486 mm x

1029 mm)

Minimum flat for door: 3-1/4" (83 mm)

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

