

Features

- Single lever handle allows for both volume and temperature control
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1bar)]
- Includes metal Pop-up drain with lift rod and tailpiece.
- 5-3/8" (137 mm) spout reach
- Coordinates with Antique faucets, accessories, and showering components to complete your bathroom.
- Premium Metal Construction
- For single-hole installation or 4-inch centers with escutcheon plate ("optional" escutcheon plate included for three-hole drillings).
- Pre-attached flexible supply lines simplify installation
- Single-handle sink faucet for single-hole installations
- KOHLER ceramic disc valves exceed industry longevity standards two times for a lifetime of durable performance
- Solid brass construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing.
- High-temperature limit stop allows you to preset a comfortable maximum temperature to eliminate scalding
- Part of the Antique faucet collection
- 1.2 gpm (gallons per minute) flow rate.

Installation

- Bath- or deck-mount.

Optional Products/Accessories

K-14531 Escutcheon Plate



ADA **CSA B651** **OBC**

Codes/Standards

ASME A112.18.1/CSA B125.1
 NSF/ANSI 61
 NSF/ANSI 372
 All applicable US Federal and State material regulations
 DOE - Energy Policy Act 1992
 EPA WaterSense®
 California Energy Commission (CEC)
 ADA
 ICC/ANSI A117.1
 CSA B651
 OBC


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	PB	Vibrant® Polished Brass
	BN	Vibrant® Brushed Nickel

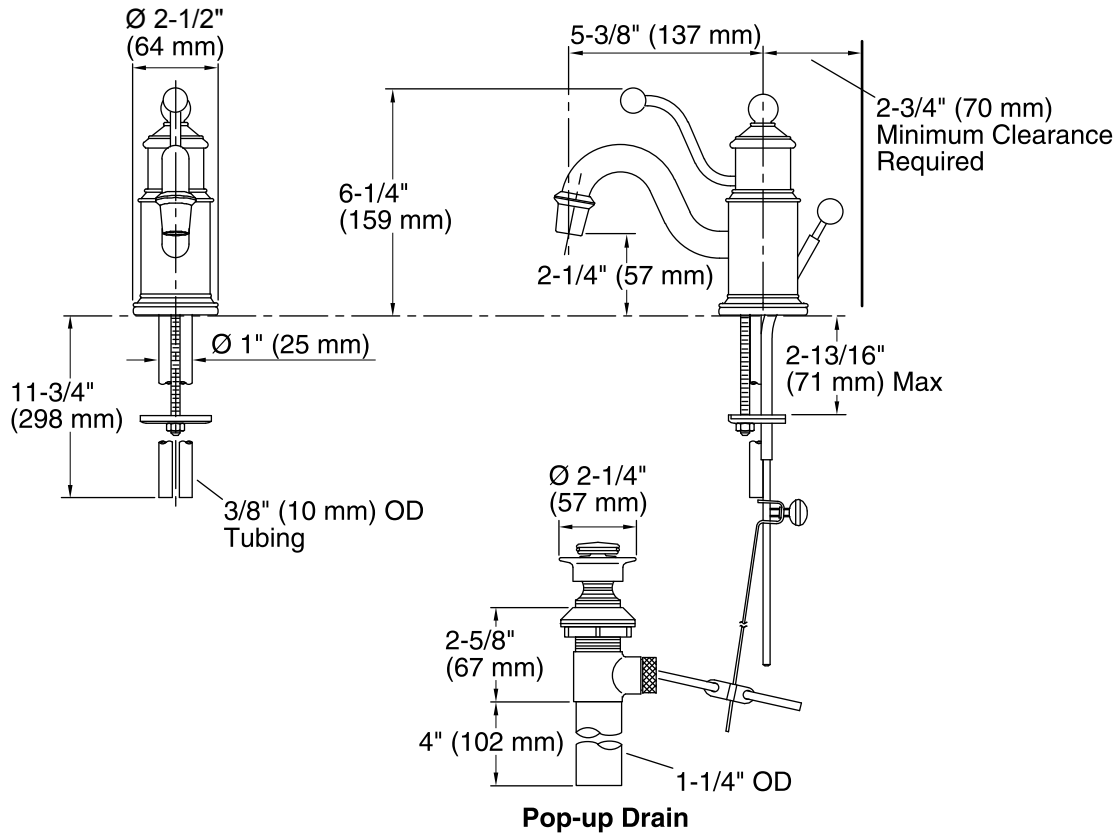

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Drain tailpiece included: Yes

Spout:

Spout reach: 5-3/8" (137 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.