

Features

- Brass construction.
- Wall-mount installation.
- For 8" (203 mm) centers.
- Valvet® valves.
- 8" (203 mm) spout reach.
- Rotating spout.
- Six-prong handles.
- Soap dish.
- Inside threaded couplings.
- Lower flow aerator options are available (refer to the Kohler Price Book).
- 1.5 gal/min (5.7 l/min) maximum flow rate [max at 60 psi (4.14 bar)]



ADA

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1

KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
--	----	-----------------

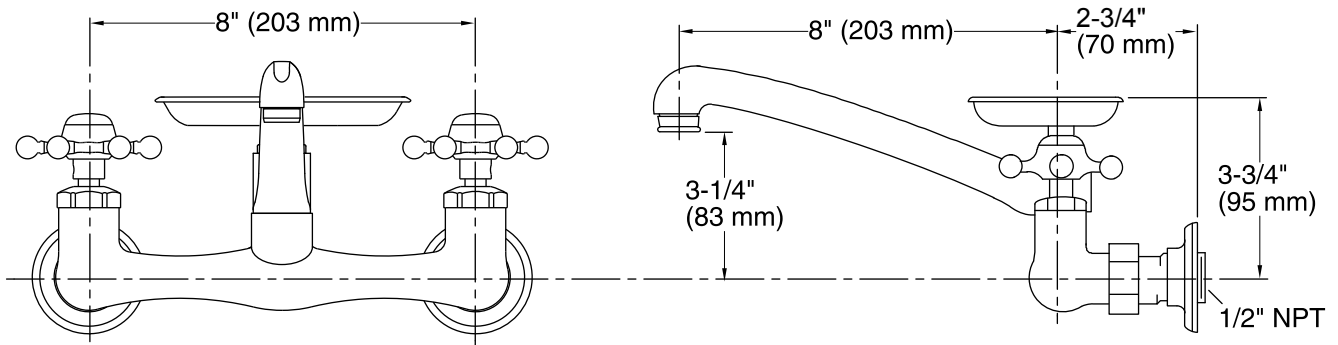

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Spout:

Spout reach: 8" (203 mm)

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.