



# Above-counter/Wall-mount Bathroom Sink

## K-2200

#### **Features**

No faucet holes; requires wall- or counter-mount faucet.

#### Material

Vitreous china.

#### Installation

- Vessel or wall-mount.
- Requires K-9655 Vessel bracket for wall-mount installation.

#### **Recommended Products/Accessories**

K-7114 Pop-Up Drain K-7129 Drain K-9018 P-Trap K-9655 Wall-Mount Vessel Bracket

#### **Included Components**

Additional Components: Adjustable linkage



ADA CSA B651

Codes/Standards
ASME A112.19.2/CSA B45.1
ADA
ICC/ANSI A117.1
CSA B651

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.


| Color | Code | Description    |
|-------|------|----------------|
|       | 0    | White          |
|       | HW1  | Honed White    |
|       | 96   | Biscuit        |
|       | 47   | Almond         |
|       | NY   | Dune           |
|       | 95   | Ice™ Grey      |
|       | G9   | Sandbar        |
|       | K4   | Cashmere       |
|       | 58   | Thunder™ Grey  |
|       | 7    | Black Black™   |
|       | HW   | Bouclé™ Muslin |
|       | HV   | Bouclé™ Tweed  |








# Above-counter/Wall-mount Bathroom Sink K-2200

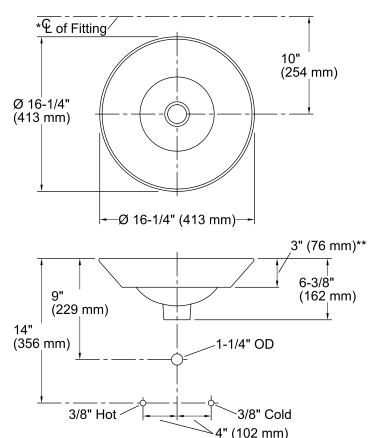



### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Single

Installation: Vessel, Wall-mount

Bowl area (Only): Diameter: 15-7/8" (403 mm)

Water depth: 4-1/4" (108 mm)

Drain hole: 1-3/4" (44 mm)

Template: 1002980-7, required, included

#### **Notes**

Install this product according to the installation instructions.

Product does not have an overflow.

\*Spout must be 5" (127 mm) long (min) for adequate clearance into the bathroom sink when installed with centerline as shown.

NOTICE: Countertop manufacturer or cutter must use the cut-out template provided with the product, or a current one provided by Kohler Co. (call 1-800-4-KOHLER). Kohler Co. is not responsible for cutout errors when the incorrect

cut-out template is used.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

