



# Highcrest™

## Elongated Toilet Bowl

### K-4302

#### Features

- Vitreous china.
- 10" (254 mm) or 12" (305 mm) rough-in.
- 1-1/2" top spud.
- 11-3/8" (289 mm) x 10-3/8" (264 mm) water area.
- 2-1/4" 57 mm) passageway.
- 1.6 gpf (6 lpf).
- 26" (660 mm) x 14-1/2" (368 mm) x 16-1/2" (419 mm).

#### Included Components

Additional Components:

Bolt cap accessory pack

Spud



ADA

CSA B651

OBC

#### Codes/Standards

ASME A112.19.2/CSA B45.1  
DOE - Energy Policy Act 1992  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes


*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------



0

White

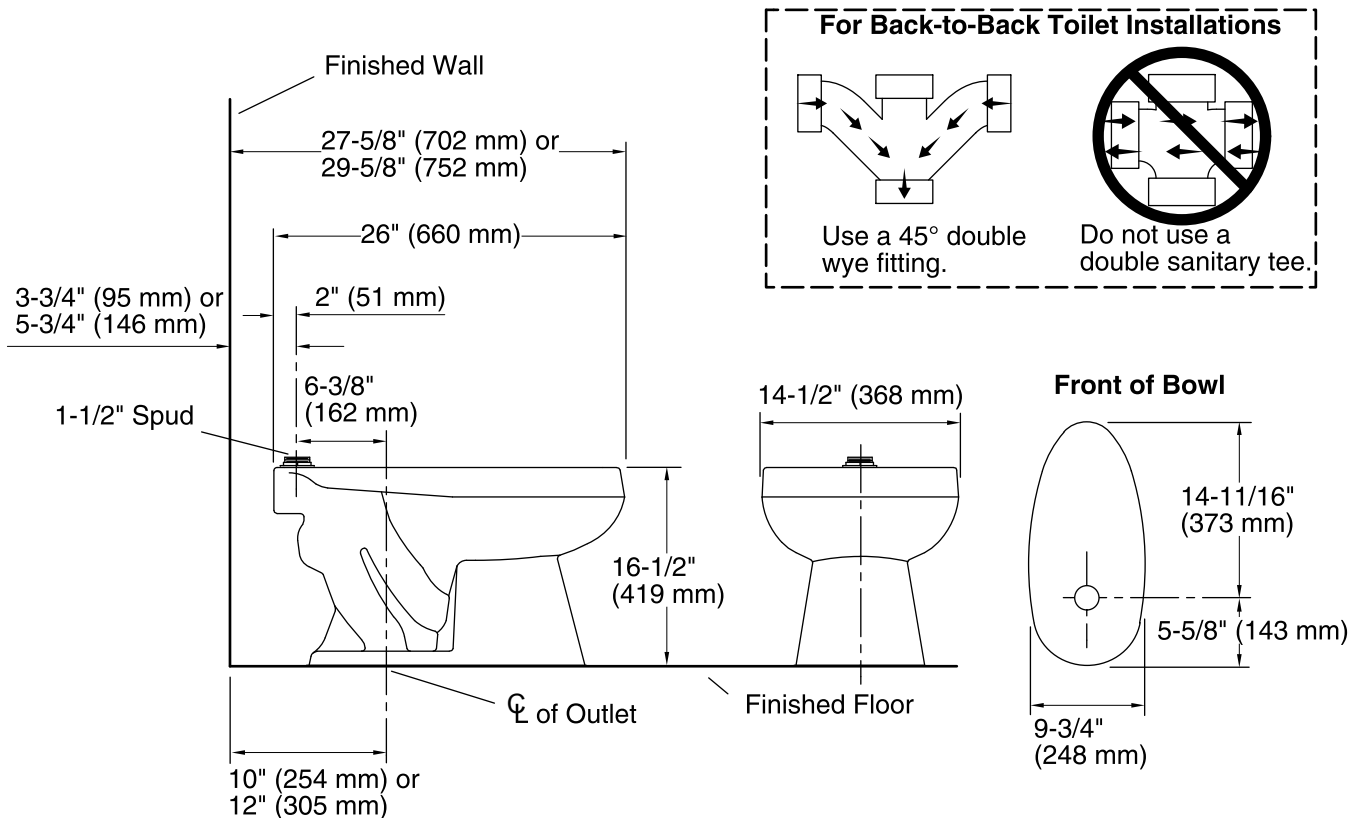

### Technical Information

All product dimensions are nominal.

Toilet type:	Flushometer, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated
Flush type:	Siphon jet
Spud size:	1-1/2", Inlet, Top
Trap passageway:	2-1/4" (57 mm)
Water surface size:	11-3/8" x 10-3/8" (289 mm x 264 mm)
Rim to water surface:	6" (152 mm)
Rough-in:	12" (305 mm)
Seat-mounting holes:	5-1/2" (140 mm)

### Fixture Supply Requirements

Min static pressure:	35 psi (241.3 kPa)
Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	25 psi (172.4 kPa)
Min flow rate:	25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

Refer to manufacturer and local codes for flush valve requirements.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.