

Shift® Ellipse Shift™ Ellipse Handshower K-45415

Features

- Multifunction handshower offers full-coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 2.0 gpm (7.6 l/min) maximum flow rate.
- Contains flow regulating check valve for backflow prevention.

Installation

- Deck-mount holder required for deck-mount installation.
- Bracket or slidebar required for wall-mount installation.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose K-9514 60" Shower Hose

Recommended Products/Accessories

K-23723 Faucet cleaner



Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|--------------------------|
| | CP | Polished Chrome |
| | SN | Vibrant® Polished Nickel |
| | BN | Vibrant® Brushed Nickel |
| | BV | Vibrant® Brushed Bronze |
| | 2BZ | Oil-Rubbed Bronze |
| | BL | Matte Black |





Shift® Ellipse Shift™ Ellipse Handshower K-45415

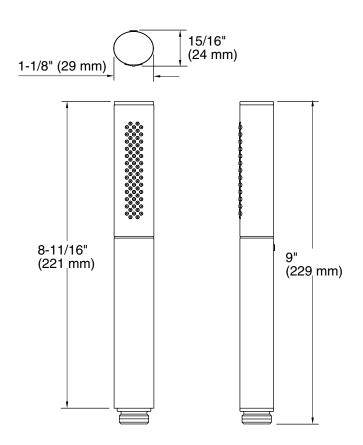

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum

2 gal/min (7.6 l/min)

flow:

Notes

Install this product according to the installation guide.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials.

Note: Handshower contains flow regulating check valve for backflow prevention.

OBC compliant when installed to the specific requirements of these regulations.

