

## Features

- 36-inch minimum base cabinet width.
- Large single bowl.
- 9-inch depth.
- Single compartment.
- Three oversized faucet holes with two oversized accessory holes to the right.
- Strainer not included.

#### Material

- KOHLER<sup>®</sup> enameled cast iron.
- Acid-resistant enamel finish.

## Installation

- Under-mount.
- Oversized holes allow for easy installation of faucets and accessories.

## **Recommended Products/Accessories**

K-9000 P-Trap K-6063 Sink Rack K-6377 Sponge Caddy K-6378 Kitchen Brush Caddy K-6379 Kitchen Squeegee K-6382 Disinfecting Wipes Dispenser K-6383 Soap Dispenser K-8618 Paper Towel Holder K-8619 Flexible Kitchen Mat K-8624 Dish Scraper K-8801 Sink Strainer K-8799 Sink Strainer K-6637 Cutting Board

## **Optional Products/Accessories**

1054375 Under-mount Sink Kit, 23"

## **Included Components**

Additional Components: Mounting hardware

## Codes/Standards

ASME A112.19.1/CSA B45.2

## KOHLER<sup>®</sup> Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	lce™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	R1	Roussillon™ Red
	20	Suede
	KA	Black 'n Tan
	FP	Caviar
	_	


7 Black Black<sup>™</sup>



# Cape Dory® under-mount kitchen sink K-5864-5U



# Cape Dory® under-mount kitchen sink K-5864-5U

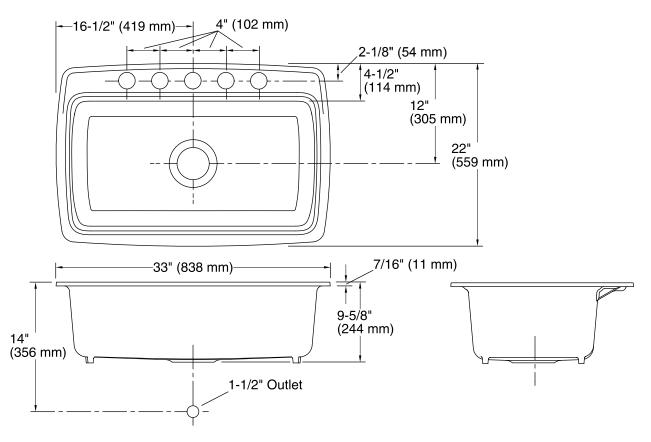

## **Technical Information**

All product dimensions are nominal.			
Bowl configuration:	Single		
Installation:	Under-mount		
Min. base cabinet width:	36" (914 mm)		
Bowl area (Only):	Length: 29" (737 mm) Width: 15" (381 mm) Bowl depth: 9" (229 mm)		
Number of deck holes:	5		
Faucet hole(s):	2-3/8" (60 mm)		
Drain hole:	3-5/8" (92 mm)		
Template:	Under-mount, 1034873-7, required, included		

#### Notes

Install this product according to the installation instructions.

Faucet holes in under-mount fixture are oversized at  $\tilde{A}$ <sup>~</sup> 2-3/8" (60 mm). Drill faucet holes in counter according to fitting roughing-in.

