

5/16" MOUNTING HOLE (3X)

✓ 100 AMP. RINGLESS METER SOCKET

3 CIRCUIT 100 AMP. LOAD CENTER
30 AMP BREAKER 1-POLE
20 AMP BREAKER 1-POLE








— BREAKER
HOLE

-R32U	5-20R2GFI
30AMP.	20AMP.
RECEPTACLE	GFI DUPLEX

-R32U	5-20R2GFI
30AMP.	20AMP.
RECEPTACLE	GFI DUPLEX

WIRE RANGE TABLE:


CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-2	12-8	12-2
LOAD	14-10	14-10	-----	-----
NEUTRAL END HOLE	14-8	14-2	12-8	12-2
NEUTRAL SIDE HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

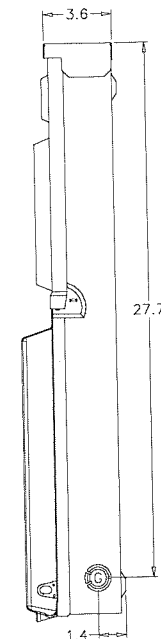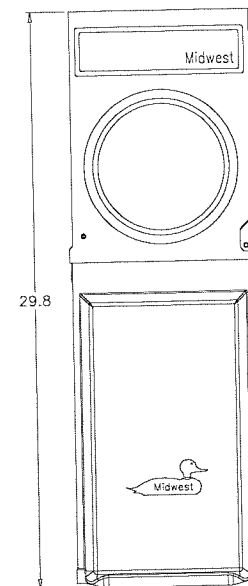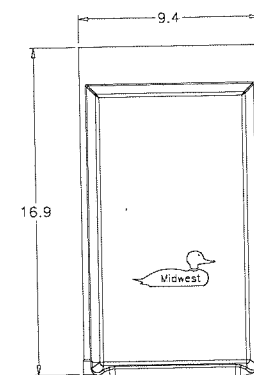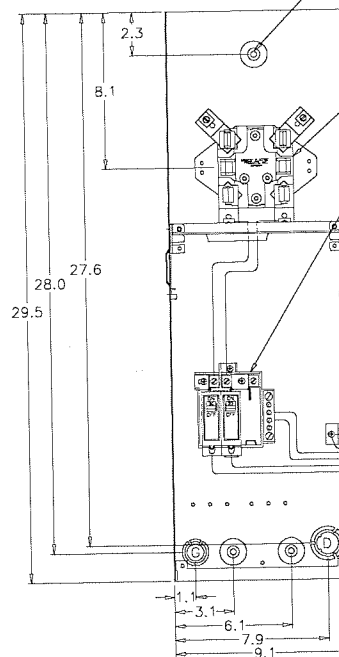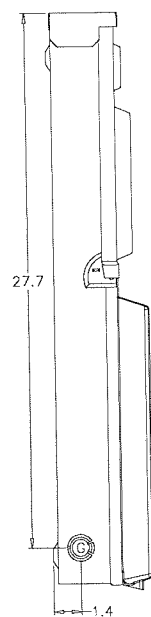

KNOCKOUT TABLE:

G= 1/2", 3/4", 1" KO
B= 1", 1-1/4", 1-1/2" KO
D= 3/4", 1", 1-1/4" KO
H= 9/16", 1/2" KO

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: JDE

Ck. By:

CR: R0814112

* = Critical To Quality

Unless Otherwise Specified

Tolerances On:
3 Pl. Decimals $\pm .010$
2 Pl. Decimals $\pm .030$
Fractions $\pm 1/32$
Angles $\pm 1/2^\circ$
Holes $\pm .003$

Holes $\pm .003$
Dimensions Are In Inches

TITLE:

LE: R041C010
OUTLINE DRAWING

DWG NO:

265A6227

(SH49)

Rev.1 CR R0814112 JE 2-19-08
Rev.2 CR R1105618 IB 08-19-11