


5/16" MOUNTING HOLE (3X)

100 AMP. RINGLESS METER

5 CIRCUIT 100 AMP. LOAD CENTER
50 AMP GFI BREAKER 2-POLE
20 AMP BREAKER 1-POLE
20 AMP BREAKER 1-POLE





5-20R2GFCI
20AMP. DUPLEX (2X)

14-50R 50AMP. RECEPTACLE



KNOCKOUT TABLE:


G= 1/2", 3/4", 1" KO
B= 1", 1-1/4", 1-1/2" KO
D= 3/4", 1", 1-1/4" KO
H= 9/16" KO

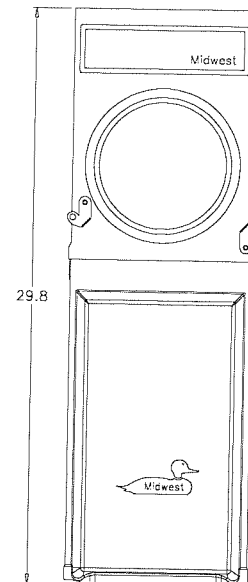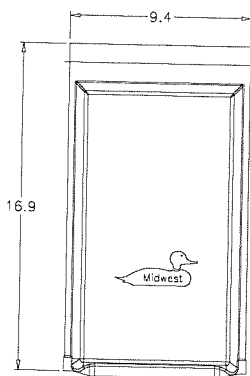

WIRE RANGE TABLE:

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	---	6-1/0	---	6-1/0
LOAD	14-10	14-10	---	---
NEUTRAL LARGE HOLE	12-8	12-1/0	10-8	10-1/0
NEUTRAL SMALL HOLE	14-8	14-4	12-8	12-4
EQUIP. GRND.	12-8	12-2	12-8	12-2

MIDWEST ELECTRIC
PRODUCTS, INC.
Mankato, MN



Dr. By: JDE
Ck. By:
CR: R0814112

* = Critical To Quality

Unless Otherwise
Specified

Tolerances On:
3 Pl. Decimals ± .010
2 Pl. Decimals ± .030
Fractions ± 1/32
Angles ± 1/2°
Holes ± .003
Dimensions Are in Inches

AutoCad
Generated

SCALE 1 : 1
SIZE A

SHEET 1 OF 1

TITLE: R076C033
OUTLINE DRAWING

DWG NO:

265A6227

SH32