

**INPUT**

- 120V AC, 60Hz, 60w

**OUTPUT**

- 12V DC, 3A, Class 2 transformer

**INPUT LEAD**

- 18 Gauge, 6ft. long with plug end

**OUTPUT LEAD**

- 18 gauge, 6ft. pigtail for additional wiring (non-ribbed = positive, ribbed = negative)

**SIZE**

- 4" (w) x 4-3/4" (L)

**MOUNTING**

- Wall or deck with mounting hardware. Can power up to 8 faucets or flush valves. (Note: Insulation displacement connectors between multi-unit AC adapter and wire lead provided by installer)

**WIRE LEADS**

- 104401 -18 gauge, 6" long
- 104402 -22 gauge, 24" long with 22" cable faucet wire harness shield, power connector on one end and pigtails on the other (red = positive, black = negative)

**STANDARDS**

- UL listed
- CSA certified

**WARRANTY**

- Warranted for 5 years against material or manufacturing defects



**Multi-Unit Power AC Adapter & 24" Wire Lead**

**Model: 104401 (adapter), 104402 (wire lead)**

**Warning:** Do not touch leads ( + - ) together while unit is plugged in. Unit will fail and warranty will be voided.


**104402** must be ordered separately. One needed per faucet/flush valve.

**COMPATIBLE SKUS**

- CA8301 and 8301
- CA8302 and 8302
- CA8303 and 8303
- CA8304 and 8304
- ALL FLUSH VALVES

All wiring connections must comply with local electrical codes; consult a licensed electrician if necessary.

**Wiring Connection Diagram**

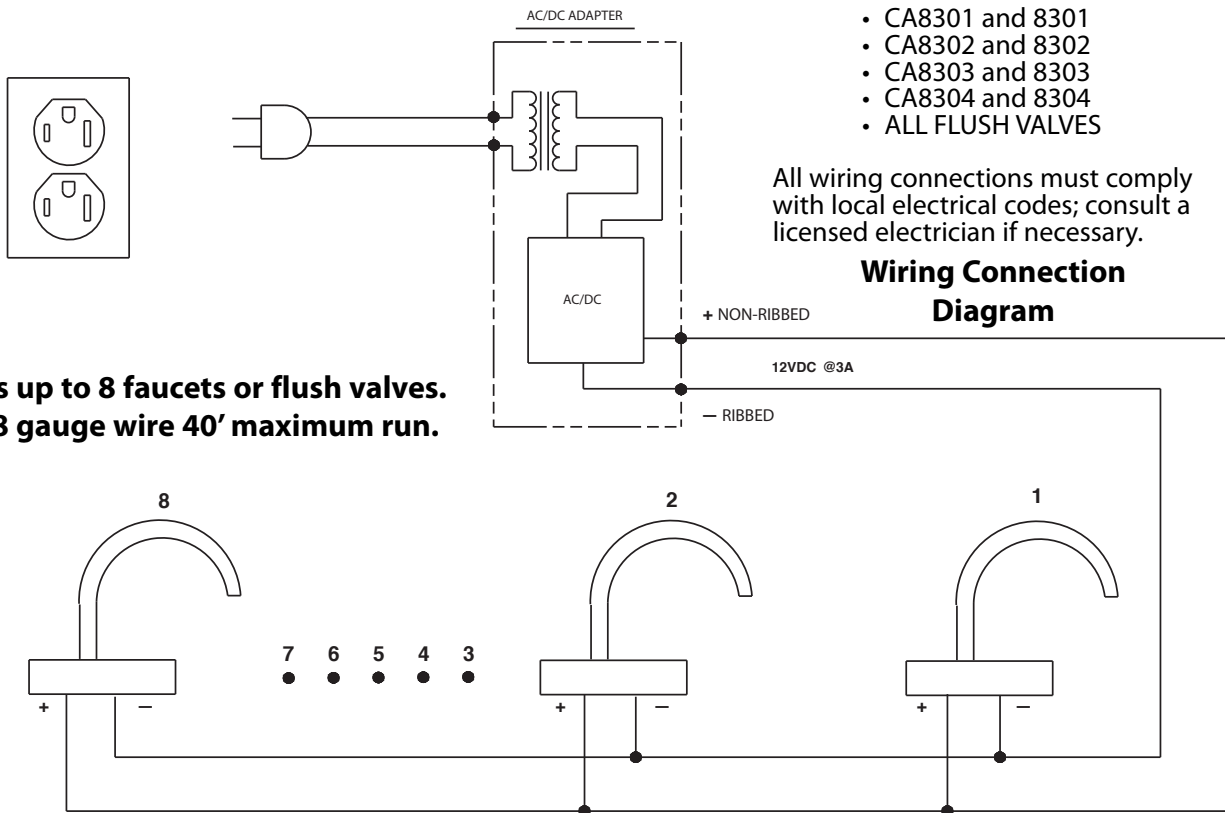

**Powers up to 8 faucets or flush valves. Use 18 gauge wire 40' maximum run.**

**CRITICAL DIMENSIONS**

(DO NOT SCALE)