




1

NOTES:

1. IDENTIFICATION: VERTICAL, (20) 5-20R
120V / 20A / SINGLE-PHASE POU

<u>PART NO.</u>	<u>COLOR</u>
CMRPSV20SILTL	BLACK

2. ACCESSORY COMPONENTS:
(4) #10-32 x 1/2" MOUNTING SCREWS
(4) #12-24 x 1/2" MOUNTING SCREWS
(2) #10-32 LOCKING COLLAR SCREWS
(2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. SURGE SUPPRESSION UP TO 330V OR 720 JOULES.
5. UL® & c-UL® LISTED 1950.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR
A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE
WITH THIS PART.
8. MAXIMUM AVAILABLE INPUT POWER = 1.9 KW
9. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,
STATE, AND LOCAL CODES.

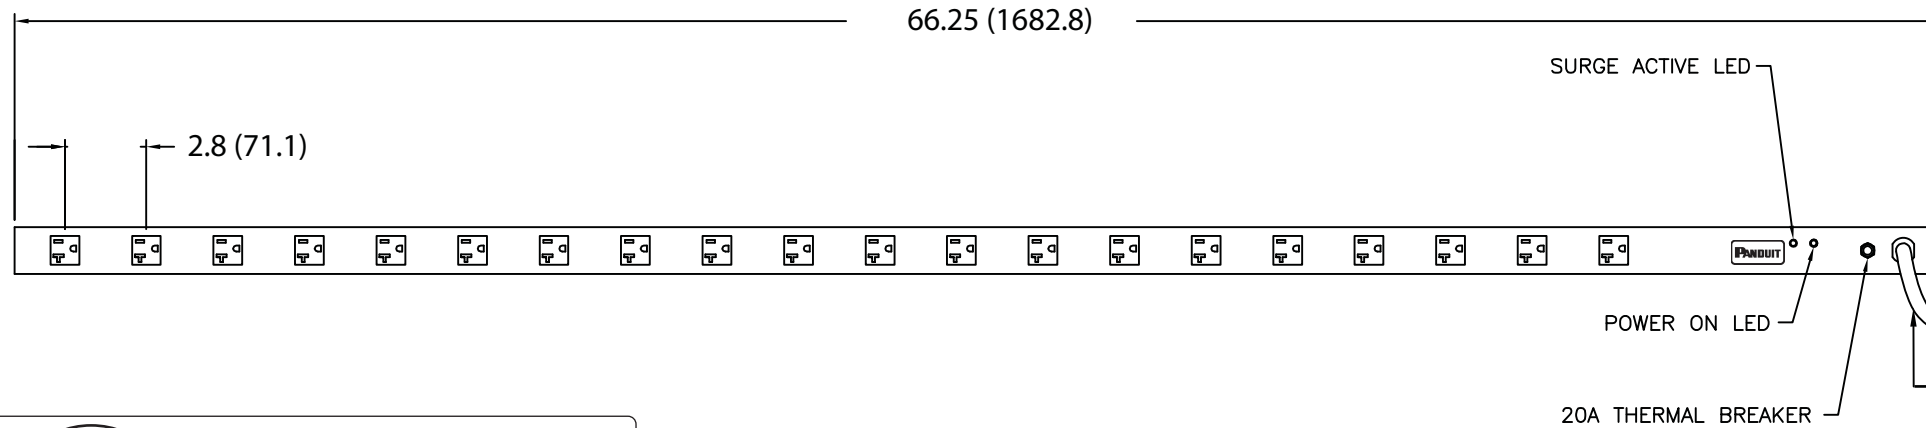

MODEL FILENAME		09V098YS/00.PRT	
CAD FILENAME/LAYERS		09V098YS_DC/00A.PRT	
PANDUIT CORP TINLEY PARK, ILLINOIS			
VERTICAL, (20) 5-20R POWER OUTLET UNIT CUSTOMER DRAWING			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:		UNLESS OTHERWISE SPECIFIED,	
INCHES X.X +/- 0.03 X.XX +/- 0.015 X.XXX +/- 0.005		[METRIC - MILLIMETER] X. +/- 0.8 X.X +/- 0.4 X.XX +/- 0.13	
ANGLE +/- 1°		ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION	
DRAWN BY MRWA		SCALE NONE	
DATE 10-26-11		DRAWING NO. 09V098YS	
CHK'D KRKE		DWG B SIZE	