


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

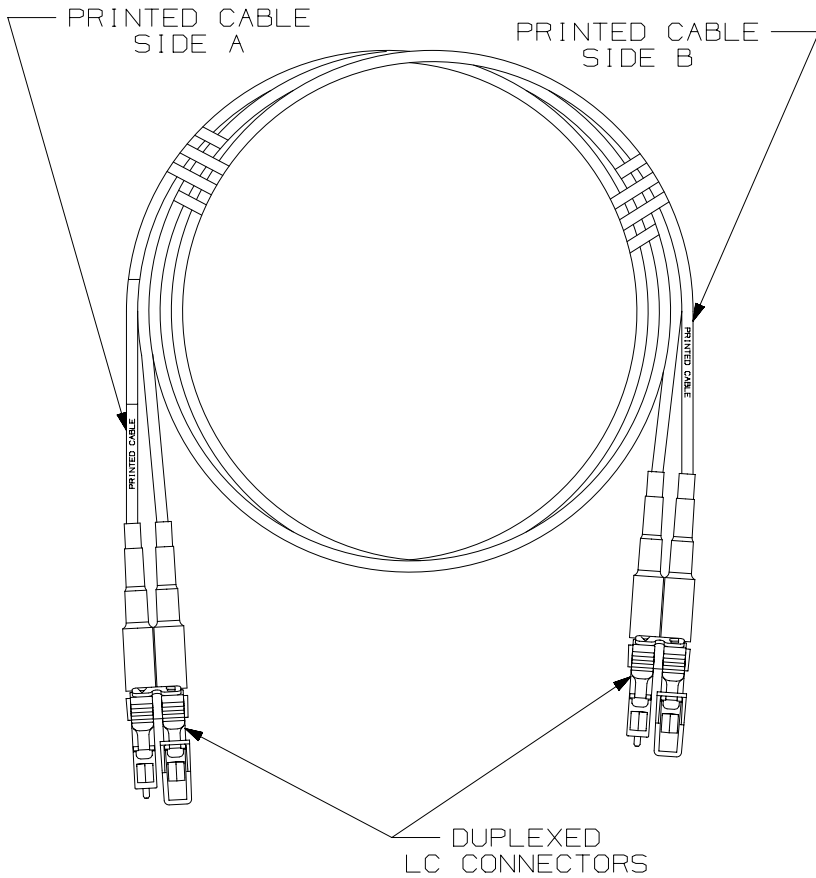

COMPONENT	TYPE/DESCRIPTION	COLOR	MAXIMUM LOSS
CABLE	MULTIMODE 62.5/125um OFNR, 1.6mm DUPLEX	ORANGE	3.0 dB/KM @ 850nm 1.0 dB/KM @ 1300nm
CONNECTORS	MULTIMODE LC	ELECTRIC IVORY	.30 dB

- NOTES:
1. SEE CURRENT CATALOG FOR PACKAGE QUANTITY.
  2. FOR LENGTHS OTHER THAN THOSE SHOWN, CONTACT YOUR PANDUIT SALES PERSON.
  3. TESTED TO EIA/TIA 568-B.3.
  4. DUST CAPS MAY VARY FROM ONES SHOWN.
  5. PATCH CORD ROUTING CONFIGURATION A TO B.
  6. ALL MATERIALS AND COMPONENTS USED MUST MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

PANDUIT PART NO.	MINIMUM LENGTH	FERRULE TYPE
F6E10-10M1Y	1 METER ( 3.28 FT. )	ZIRCONIA
F6E10-10M2Y	2 METERS ( 6.56 FT. )	ZIRCONIA
F6E10-10M3Y	3 METERS ( 9.84 FT. )	ZIRCONIA
F6E10-10M4Y	4 METERS ( 13.12 FT. )	ZIRCONIA
F6E10-10M5Y	5 METERS ( 16.40 FT. )	ZIRCONIA
F6E10-10M6Y	6 METERS ( 19.69 FT. )	ZIRCONIA
F6E10-10M7Y	7 METERS ( 22.97 FT. )	ZIRCONIA
F6E10-10M8Y	8 METERS ( 26.25 FT. )	ZIRCONIA
F6E10-10M9Y	9 METERS ( 29.53 FT. )	ZIRCONIA
F6E10-10M10Y	10 METERS ( 32.81 FT. )	ZIRCONIA
F6E10-10M15Y	15 METERS ( 42.21 FT. )	ZIRCONIA
F6E10-10M20Y	20 METERS ( 65.62 FT. )	ZIRCONIA
F6E10-10M25Y	25 METERS ( 82.02 FT. )	ZIRCONIA
F6E10-10M30Y	30 METERS ( 98.43 FT. )	ZIRCONIA

PART NUMBER		F6E10-10M*Y	
TITLE			
DUPLEX 62.5/125um FIBER OPTIC PATCH CORD LC TO LC CONFIGURATION			
CUSTOMER DRAWING			
ITEM REVISION NAME		M01268DC/00	
DATASET FILE NAME		M01268DC_DC/02D	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN ( mm )		MATERIAL:	
.X ±		.XXX ±	
.XX ±		ANGLES ±	
		THIRD ANGLE PROJECTION	
DRAWING NUMBER:		01268-47	
DRAWN BY	DATE	CHK	SCALE
EFK	12-12-01	WMA	NONE
SHT 1 OF 1			SIZE
			A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	8/26/15	JSP	WJM	RWB	A. UPDATED DRAWING TITLE BLOCK.	01268-47

D101000DA/14

2

1

2

1