

**PASS & SEYMOUR®**  
 PlugTail® Plug Load Controllable Devices Extra  
 Heavy-Duty Spec Grade Receptacles 15 & 20A, 125V

**Meet Plug Load Control requirements faster than ever.**

PlugTail devices and connectors mean that device installation is the same regardless of skill level of the installer. The UL-Listed connectors are keyed to ensure proper wiring installation into each receptacle. The connector simply snaps into the back of the device – no fussing with wires, stripping, or tightening screws. PlugTail devices are finger safe with no exposed terminals, so taping is not required. Device installation is faster than ever!

These durable, dependable receptacles feature a permanently marked, differentiated solution that meets all necessary code requirements. The controlled receptacle marking printed on the face of the receptacle is both NEMA-approved, and compliant with the National Electrical Code®, CA Title 24, and ASHRAE Energy Efficiency Standard 90.1. This clear, permanent marking helps end-users differentiate controlled receptacles from others.



**PTTR26362SCCHW and PTTR5362CDW**

**FEATURES & BENEFITS**

**.032 inch thick, brass, triple-wipe power contacts** for lasting retention.

**Dual mechanical shutter system** to help prevent insertion of foreign objects (TR models).

**No exposed terminals** create a finger safe application before, during, and after use

**Permanent controlled markings** on face of receptacle compliant with ASHRAE 90.1, CA Title 24, and NEC.



**PTTR26362SCCHW**

**Auto-ground clip** assures positive ground.

**Built-in connector** features large brass terminal contacts to ensure consistent, reliable electrical connections.

**Half-controlled versions are pre-wired with one welded pre-stripped wire lead** to facilitate split circuit applications.

**Plated steel strap design** for maximum durability and corrosion resistance

**FIELD USES / VERTICAL MARKETS**

- Office
- Education
- Institutional
- MDU
- Lodging/Hospitality



# PASS & SEYMOUR®

## PlugTail® Plug Load Controllable Devices Extra Heavy-Duty Spec Grade Receptacles 15 & 20A, 125V

### TECHNICAL INFORMATION

Catalog #	Ratings	Color	NEMA Config.
<b>Half Controlled TR PlugTail Deco Receptacles</b>			
PTTR26262SCCH	15A 125V	Brown	5-15R
PTTR26262SCCHGRY	15A 125V	Grey	5-15R
PTTR26262SCCHI	15A 125V	Ivory	5-15R
PTTR26262SCCHLA	15A 125V	Lt. Almond	5-15R
PTTR26262SCCHW	15A 125V	White	5-15R
PTTR26362SCCH	20A 125V	Brown	5-20R
PTTR26362SCCHBK	20A 125V	Black	5-20R
PTTR26362SCCHGRY	20A 125V	Grey	5-20R
PTTR26362SCCHI	20A 125V	Ivory	5-20R
PTTR26362SCCHLA	20A 125V	Lt. Almond	5-20R
PTTR26362SCCHW	20A 125V	White	5-20R
<b>Dual Controlled TR PlugTail Deco Receptacles</b>			
PTTR26262CD	15A 125V	Brown	5-15R
PTTR26262CDGRY	15A 125V	Grey	5-15R
PTTR26262CDI	15A 125V	Ivory	5-15R
PTTR26262CDLA	15A 125V	Lt. Almond	5-15R
PTTR26262CDW	15A 125V	White	5-15R
PTTR26362CD	20A 125V	Brown	5-20R
PTTR26362CDBK	20A 125V	Black	5-20R
PTTR26362CDGRY	20A 125V	Grey	5-20R
PTTR26362CDI	20A 125V	Ivory	5-20R
PTTR26362CDLA	20A 125V	Lt. Almond	5-20R
PTTR26362CDW	20A 125V	White	5-20R

Catalog #	Ratings	Color	NEMA Config.
<b>Half Controlled PlugTail Deco Receptacles</b>			
PT26252SCCH	15A 125V	Brown	5-15R
PT26252SCCHGRY	15A 125V	Grey	5-15R
PT26252SCCHI	15A 125V	Ivory	5-15R
PT26252SCCHLA	15A 125V	Lt. Almond	5-15R
PT26252SCCHW	15A 125V	White	5-15R
PT26352SCCH	20A 125V	Brown	5-20R
PT26352SCCHBK	20A 125V	Black	5-20R
PT26352SCCHGRY	20A 125V	Grey	5-20R
PT26352SCCHI	20A 125V	Ivory	5-20R
PT26352SCCHLA	20A 125V	Lt. Almond	5-20R
PT26352SCCHW	20A 125V	White	5-20R
<b>Dual Controlled PlugTail Deco Receptacles</b>			
PT26252CD	15A 125V	Brown	5-15R
PT26252CDGRY	15A 125V	Grey	5-15R
PT26252CDI	15A 125V	Ivory	5-15R
PT26252CDLA	15A 125V	Lt. Almond	5-15R
PT26252CDW	15A 125V	White	5-15R
PT26352CD	20A 125V	Brown	5-20R
PT26352CDBK	20A 125V	Black	5-20R
PT26352CDGRY	20A 125V	Grey	5-20R
PT26352CDI	20A 125V	Ivory	5-20R
PT26352CDLA	20A 125V	Lt. Almond	5-20R
PT26352CDW	20A 125V	White	5-20R

For more information on these and other P&S products refer to our Catalog or visit our web site.

PlugTail® Plug Load Controllable Devices Extra Heavy-Duty Spec Grade Receptacles 15 & 20A, 125V

**TECHNICAL INFORMATION (CONT.)**

Catalog #	Ratings	Color	NEMA Config.
<b>Half Controlled TR PlugTail Duplex Receptacles</b>			
PTTR5262SCCH	15A 125V	Brown	5-15R
PTTR5262SCCHGRY	15A 125V	Grey	5-15R
PTTR5262SCCHI	15A 125V	Ivory	5-15R
PTTR5262SCCHLA	15A 125V	Lt. Almond	5-15R
PTTR5262SCCHW	15A 125V	White	5-15R
PTTR5362SCCH	20A 125V	Brown	5-20R
PTTR5362SCCHBK	20A 125V	Black	5-20R
PTTR5362SCCHGRY	20A 125V	Grey	5-20R
PTTR5362SCCHI	20A 125V	Ivory	5-20R
PTTR5362SCCHLA	20A 125V	Lt. Almond	5-20R
PTTR5362SCCHW	20A 125V	White	5-20R
<b>Dual Controlled TR PlugTail Duplex Receptacles</b>			
PTTR5262CD	15A 125V	Brown	5-15R
PTTR5262CDGRY	15A 125V	Grey	5-15R
PTTR5262CDI	15A 125V	Ivory	5-15R
PTTR5262CDLA	15A 125V	Lt. Almond	5-15R
PTTR5262CDW	15A 125V	White	5-15R
PTTR5362CD	20A 125V	Brown	5-20R
PTTR5362CDBK	20A 125V	Black	5-20R
PTTR5362CDGRY	20A 125V	Grey	5-20R
PTTR5362CDI	20A 125V	Ivory	5-20R
PTTR5362CDLA	20A 125V	Lt. Almond	5-20R
PTTR5362CDW	20A 125V	White	5-20R

Catalog #	Ratings	Color	NEMA Config.
<b>Half Controlled PlugTail Duplex Receptacles</b>			
PT5262SCCH	15A 125V	Brown	5-15R
PT5262SCCHGRY	15A 125V	Grey	5-15R
PT5262SCCHI	15A 125V	Ivory	5-15R
PT5262SCCHLA	15A 125V	Lt. Almond	5-15R
PT5262SCCHW	15A 125V	White	5-15R
PT5362SCCH	20A 125V	Brown	5-20R
PT5362SCCHBK	20A 125V	Black	5-20R
PT5362SCCHGRY	20A 125V	Grey	5-20R
PT5362SCCHI	20A 125V	Ivory	5-20R
PT5362SCCHLA	20A 125V	Lt. Almond	5-20R
PT5362SCCHW	20A 125V	White	5-20R
<b>Dual Controlled PlugTail Duplex Receptacles</b>			
PT5262CD	15A 125V	Brown	5-15R
PT5262CDGRY	15A 125V	Grey	5-15R
PT5262CDI	15A 125V	Ivory	5-15R
PT5262CDLA	15A 125V	Lt. Almond	5-15R
PT5262CDW	15A 125V	White	5-15R
PT5362CD	20A 125V	Brown	5-20R
PT5362CDBK	20A 125V	Black	5-20R
PT5362CDGRY	20A 125V	Grey	5-20R
PT5362CDI	20A 125V	Ivory	5-20R
PT5362CDLA	20A 125V	Lt. Almond	5-20R
PT5362CDW	20A 125V	White	5-20R

Catalog #	Wire Type	Length
<b>PlugTail Connectors – Right Angle</b>		
PTRA6STR	#12 AWG Stranded	6 inches
PTRA6SOL	#12 AWF Solid	6 inches

## DIMENSIONS

### 3rd Party Compliance

cUL Listed, File Number E140596, Standard UL498.  
 Federal Specification WC596.  
 Conforms to NEMA WD-1 and WD-6.

### Performance

#### Electrical


Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	125V
Current Interrupting	Certified for current interrupting at full-rated current (receptacle only)
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

#### Mechanical

PlugTail Connector Identification	#12 AWG, THHN, copper conductor, 6" leads, stripped, solid or stranded, for use with PlugTail Receptacles only
Product Identification	Ratings are permanent part of the device

#### Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

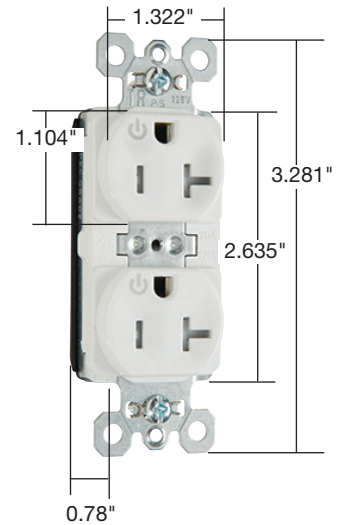


### PlugTail Receptacle Materials

Face	Nylon
Integral Ground System	.036 260 Brass
Back Body	PVC
Assembly Drive Screw	Zinc-Plated Steel
Line Contacts	.032 688 Brass
Auto-Ground Clip	Stainless Steel
Mounting Strap	.042" Zinc-Plated Steel
Mounting Screws	Tri-Drive Steel

### Warranty

1 Year

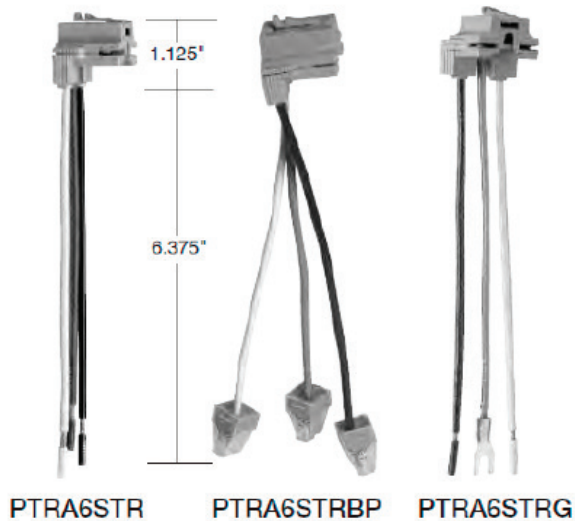

#### Electrical Wiring Systems

P.O. Box 4822  
 Syracuse, NY 13221-4822  
 Phone: 1.800.776.4035  
[www.legrand.us/passandseymour](http://www.legrand.us/passandseymour)

570 Applewood Crescent  
 Vaughan, Ontario L4K 4B4  
 Phone: 905.738.9195  
[www.legrand.ca](http://www.legrand.ca)