

PASS & SEYMOUR®

CABLE REELS

1000, 1200, 1400 & SDR SERIES



legrand®

SAFE, RELIABLE

Our high-performance, safety-driven solutions have the same unifying principle no matter where they are used: Difficult conditions don't mean products and devices need to be difficult to install and use.

As an addition to our growing industrial product line, Cable Reels from Legrand enhance any commercial or industrial application. They're easy to use and enhance productivity, maximizing efficiency by keeping cords and power control organized. Made in the USA, each reel is designed to work hard in hard environments with components that are high-quality, durable and dependable. Focus on getting the job done quickly and well - without interruption.

FEATURES & BENEFITS

- Sturdy, high-quality construction
- Made in the USA
- Safe and reliable
- Prevents tripping, shocks and burns
- Smooth cable payout
- Minimizes cable stress, prevents cable damage and extends cable life
- Keeps cables neatly stored and out of the way
- Easy installation



& STURDY



1000 SERIES CABLE REELS

For commercial and light industrial applications, there's no better reel than the 1000 Series. Built with tough, reliable components, this cable reel is durable and made to last. High-quality construction places it above other options, while still remaining an economical and efficient choice for warehouses, maintenance shops and more.

1000 Series Cable Reels are incredibly easy to install and use, featuring separate base plates that allow the reel to be quickly repositioned and moved. Add these cable reels to your equipment and experience a safer, cleaner and more efficient worksite.

FEATURES

- Retracts cables up to 50 feet vertically (even with mobile end accessories attached)
- Can be quickly repositioned to bring cables where they are needed
- 20 amp, 125 volt slip ring
- Six-foot feeder cord
- Adjustable ball stop
- Ceiling, wall or bench mounting
- Rated for indoor use
- Reinforced steel frame
- Black molded nylon construction
- Robust, long-life spring
- Two-year warranty



LEGRAND PART NUMBERING SYSTEM 1000 SERIES

Product Group	Product Series	Cable Gauge	# Conductors	GFCI	Cord Length	Mobile End	Amperage
CR = Cord Reel PD = Pendant	CD = 1000 Series (Commercial Duty) 12 = 1200 Series 14 = 1400 Series	16 12	3	N = No	25 35 50	F = Flying Lead R = Quad RB T = Tritap S = Single Outlet L = Locking Single Outlet G = Ground Continuity Monitoring	10 15 20

PART NUMBER	MOBILE END	GFCI	LENGTH	CABLE	AMPERAGE
CRCD163N25F10	Flying Lead	No	25	16AWG 3C	10
CRCD163N35F10	Flying Lead	No	35	16AWG 3C	10
CRCD163N50F10	Flying Lead	No	50	16AWG 3C	10
CRCD123N25F20	Flying Lead	No	25	12AWG 3C	20
CRCD123N35F20	Flying Lead	No	35	12AWG 3C	20
CRCD123N50F20	Flying Lead	No	50	12AWG 3C	20
CRCD163N25R10	Quad RB	No	25	16AWG 3C	10
CRCD163N35R10	Quad RB	No	35	16AWG 3C	10
CRCD163N50R10	Quad RB	No	50	16AWG 3C	10
CRCD123N25R15	Quad RB	No	25	12AWG 3C	15
CRCD123N35R15	Quad RB	No	35	12AWG 3C	15
CRCD123N50R15	Quad RB	No	50	12AWG 3C	15
CRCD123N25R20	Quad RB	No	25	12AWG 3C	20
CRCD123N35R20	Quad RB	No	35	12AWG 3C	20
CRCD123N50R20	Quad RB	No	50	12AWG 3C	20
CRCD163N25T10	Tri-Tap	No	25	16AWG 3C	10
CRCD163N35T10	Tri-Tap	No	35	16AWG 3C	10
CRCD163N50T10	Tri-Tap	No	50	16AWG 3C	10
CRCD123N25T15	Tri-Tap	No	25	12AWG 3C	15
CRCD123N35T15	Tri-Tap	No	35	12AWG 3C	15
CRCD123N50T15	Tri-Tap	No	50	12AWG 3C	15
CRCD123G25R15	Quad RB	Yes	25	12AWG 3C	15
CRCD123G35R15	Quad RB	Yes	35	12AWG 3C	15
CRCD123G50R15	Quad RB	Yes	50	12AWG 3C	15
CRCD123G25R20	Quad RB	Yes	25	12AWG 3C	20
CRCD123G35R20	Quad RB	Yes	35	12AWG 3C	20
CRCD123G50R20	Quad RB	Yes	50	12AWG 3C	20
CRCD123G25T15	Tri-Tap	Yes	25	12AWG 3C	15
CRCD123G35T15	Tri-Tap	Yes	35	12AWG 3C	15
CRCD123G50T15	Tri-Tap	Yes	50	12AWG 3C	15
CRCD123N50S15	Single Outlet	No	50	12AWG 3C	15
CRCD123N50S20	Single Outlet	No	50	12AWG 3C	20
CRCD123N50L15	Locking Single Outlet	No	50	12AWG 3C	15
CRCD123N50L20	Locking Single Outlet	No	50	12AWG 3C	20
CRCD123N35S15	Single Outlet	No	35	12AWG 3C	15
CRCD123N35S20	Single Outlet	No	35	12AWG 3C	20
CRCD123N35L15	Locking Single Outlet	No	35	12AWG 3C	15
CRCD123N35L20	Locking Single Outlet	No	35	12AWG 3C	20
CRCD123N25S15	Single Outlet	No	25	12AWG 3C	15
CRCD123N25S20	Single Outlet	No	25	12AWG 3C	20
CRCD123N25L15	Locking Single Outlet	No	25	12AWG 3C	15
CRCD123N25L20	Locking Single Outlet	No	25	12AWG 3C	20
CRCD123N35G15	Ground Continuity Monitor	No	35	12AWG 3C	15
CRCD123N50G15	Ground Continuity Monitor	No	50	12AWG 3C	15
CRCD123N35G20	Ground Continuity Monitor	No	35	12AWG 3C	20
CRCD123N50G20	Ground Continuity Monitor	No	50	12AWG 3C	20

1200 SERIES CABLE REELS

For industrial applications that require a small spring-driven cord reel, the 1200 Series is designed for superb reliability with rugged features for harsh environments. Long-lasting and available with different amperages and cable lengths, there's an option for you.

1200 Series Cable Reels are particularly well suited for assembly and fabrication sites, automotive work bays, truck crane control, conveyors, utility trucks and educational, entertainment and recreational centers.


FEATURES

- All-steel construction with fiberglass/nylon drum
- Durable yellow or black powder-coated finish
- Options include ball stop only or receptacle box
- Operating temperature range of -22°F to 194°F (-30°C to 90°C)
- Adjustable cable guide arm with 12 positions to direct cables wherever you need them
- Smooth-running 4-roller guide for minimum cable stress
- Ratchet that locks the spool to keep cable at specific extension and disengages by pulling
- Adjustable ball stop that limits cable retraction and prevents damage to cord end accessories
- Precision slip ring assembly for long life
- 6-foot feeder cord
- Safety chain hole
- Cable included
- UL and CSA Listed



PART NUMBER	COLOR	CABLE LENGTH	APPLICATION	AWG/C	AMPERAGE	END ACCESSORY
CR12L123N50F20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N35F20	Yellow	35 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N25F20B	Black	25 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N25F20	Yellow	25 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N50R20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	20A Quad RB
CR12L123N25R20	Yellow	25 ft.	Lift/Drag	12AWG 3C	20	20A Quad RB
CR12L123N30F20	Yellow	30 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N50F20B	Black	50 ft.	Lift/Drag	12AWG 3C	20	None
CR12L123N30F20B	Black	30 ft.	Lift/Drag	12AWG 3C	20	None
CR12L124N25F16	Yellow	25 ft.	Lift/Drag	12AWG 4C	16	None
CR12L124N35F16	Yellow	35 ft.	Lift/Drag	12AWG 4C	16	None
CR12L124N35F16B	Black	35 ft.	Lift/Drag	12AWG 4C	16	None
CR12L143N50F15	Yellow	50 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N30F15	Yellow	30 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N40F15	Yellow	40 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N50F15B	Black	50 ft.	Lift/Drag	14AWG 3C	15	None
CR12L143N30F15B	Black	30 ft.	Lift/Drag	14AWG 3C	15	None
CR12L144N35F12	Yellow	35 ft.	Lift/Drag	14AWG 4C	12	None
CR12L163N50F10	Yellow	50 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N25F10	Yellow	25 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N35F10	Yellow	35 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N50F10B	Black	50 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N25F10B	Black	25 ft.	Lift/Drag	16AWG 3C	10	None
CR12L163N35F10B	Black	35 ft.	Lift/Drag	16AWG 3C	10	None
CR12L164N35F08	Yellow	35 ft.	Lift/Drag	16AWG 4C	8	None
CR12L164N50F08	Yellow	50 ft.	Lift/Drag	16AWG 4C	8	None
CR12L164N50F08B	Black	50 ft.	Lift/Drag	16AWG 4C	8	None

LEGRAND PART NUMBERING SYSTEM 1200 SERIES

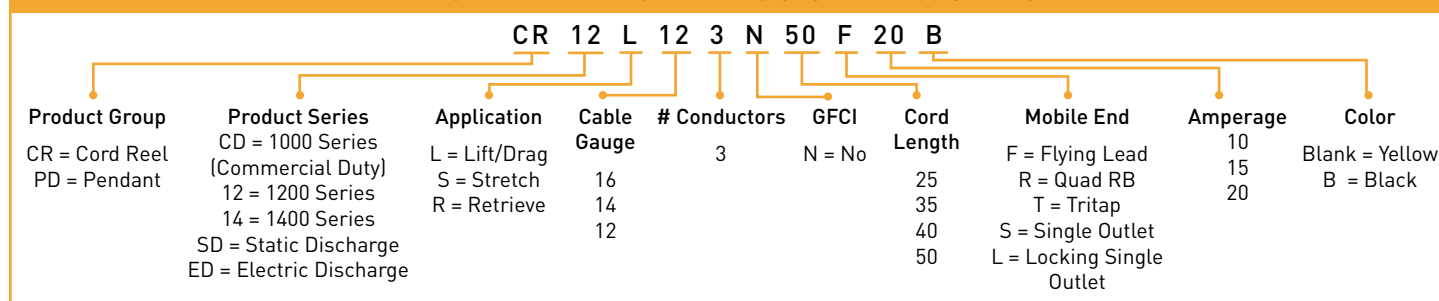

1400 SERIES CABLE REELS

The most demanding industrial environments deserve the toughest cable reel, built to withstand harsh applications for years with little or no maintenance. Look to the 1400 Series Cable Reels for assembly and fabrication sites, extendable conveyors, class A-C overhead cranes and hoists, automotive work bays and truck cranes, utility and ladder trucks.

FEATURES

- Rugged, steel frame construction with safety chain hole for overhead-mounted reels
- Precision-built main spring housed in a safety-sealed canister
- Durable yellow or black powder-coated finish with black thermoplastic slip ring cover
- Operating temperature range of -22°F to 194°F (-30°C to 90°C)
- Adjustable cable guide arm with 12 positions to direct cables wherever you need them
- Ratchet that locks the spool to keep cable at specific extension and disengages by pulling
- Adjustable ball stop that limits cable retraction and prevents damage to cord end accessories
- Precision slip ring assembly enclosed in NEMA 4 weatherproof, gasketed enclosure with grounded ring
- UL & CSA Listed for indoor & outdoor use to NEMA 4
- Come with one conductor grounded to the reel
- Type SOOW-A cable is pre-installed



LEGRAND PART NUMBERING SYSTEM 1400 SERIES

Product Group	Product Series	Application	Cable Gauge	# Conductors	GFCI	Cord Length	Mobile End	Amperage	Color
CR = Cord Reel PD = Pendant	CD = 1000 Series (Commercial Duty) 12 = 1200 Series 14 = 1400 Series SD = Static Discharge ED = Electric Discharge	L = Lift/Drag S = Stretch R = Retrieve	16 14 12	3	N = No	25 35 40 50	F = Flying Lead R = Quad RB T = Tritap S = Single Outlet L = Locking Single Outlet	10 15 20	Blank = Yellow B = Black



PART NUMBER	COLOR	CABLE LENGTH	APPLICATION	AWG/C	AMPERAGE	END ACCESSORY
CR14L103N50F25	Yellow	50 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N60F25	Yellow	60 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N30F25	Yellow	30 ft.	Lift/Drag	10AWG 3C	25	None
CR14L103N30F25B	Black	30 ft.	Lift/Drag	10AWG 3C	25	None
CR14L104N30F20	Yellow	30 ft.	Lift/Drag	10AWG 4C	20	None
CR14L104N50F20	Yellow	50 ft.	Lift/Drag	10AWG 4C	20	None
CR14S104N40F20	Yellow	40 ft.	Stretch	10AWG 4C	20	None
CR14L104N40F20	Yellow	40 ft.	Lift/Drag	10AWG 4C	20	None
CR14R104N60F20	Yellow	60 ft.	Retrieve	10AWG 4C	20	None
CR14R104N30F20	Yellow	30 ft.	Retrieve	10AWG 4C	20	None
CR14L104N30F20B	Black	30 ft.	Lift/Drag	10AWG 4C	20	None
CR14L104N40F20B	Black	40 ft.	Lift/Drag	10AWG 4C	20	None
CR14R104N60F20B	Black	60 ft.	Retrieve	10AWG 4C	20	None
CR14S123N50F20	Yellow	50 ft.	Stretch	12AWG 3C	20	None
CR14S123N50F20	Yellow	30 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N40F20	Yellow	40 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N50F20	Yellow	50 ft.	Lift/Drag	12AWG 3C	20	None
CR14S123N50F20B	Black	50 ft.	Stretch	12AWG 3C	20	None
CR14L123N30F20B	Black	30 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N40F20B	Black	40 ft.	Lift/Drag	12AWG 3C	20	None
CR14L123N50F20B	Black	50 ft.	Lift/Drag	12AWG 3C	20	None
CR14L124N40F16	Yellow	40 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N50F16	Yellow	50 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N30F16	Yellow	30 ft.	Lift/Drag	12AWG 4C	16	None
CR14S124N40F16	Yellow	40 ft.	Stretch	12AWG 4C	16	None
CR14S124N50F16	Yellow	50 ft.	Stretch	12AWG 4C	16	None
CR14S124N30F16	Yellow	30 ft.	Stretch	12AWG 4C	16	None
CR14L124N20F16	Yellow	20 ft.	Lift/Drag	12AWG 4C	16	None
CR14R124N30F16	Yellow	30 ft.	Retrieve	12AWG 4C	16	None
CR14L124N40F16B	Black	40 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N50F16B	Black	50 ft.	Lift/Drag	12AWG 4C	16	None
CR14L124N30F16B	Black	30 ft.	Lift/Drag	12AWG 4C	16	None
CR14S124N40F16B	Black	40 ft.	Stretch	12AWG 4C	16	None
CR14L143N30F15	Yellow	30 ft.	Lift/Drag	14AWG 3C	15	None
CR14R143N100F15	Yellow	100 ft.	Retrieve	14AWG 3C	15	None
CR14L144N40F12	Yellow	40 ft.	Lift/Drag	14AWG 4C	12	None
CR14L144N30F12	Yellow	30 ft.	Lift/Drag	14AWG 4C	12	None
CR14S144N50F12	Yellow	50 ft.	Stretch	14AWG 4C	12	None
CR14S144N30F12	Yellow	30 ft.	Stretch	14AWG 4C	12	None
CR14L163N70F10	Yellow	70 ft.	Lift/Drag	16AWG 3C	10	None
CR14L163N100F10	Yellow	100 ft.	Lift/Drag	16AWG 3C	10	None
CR14L163N70F10B	Black	70 ft.	Lift/Drag	16AWG 3C	10	None

STATIC DISCHARGE REELS

Static discharge reels are designed to provide maximum safety when using cables in hazardous areas. The reel clamps to the ground and dissipates static electricity that has gathered, reducing the possibility of explosions and sparks. These safe, reliable reels are perfect for static grounding of fuel tanks, airplanes and utility vehicles.


FEATURES

- Built to NEC® standards
- Rugged all-steel construction
- Compact design
- Mounts in any position with spool perpendicular
- Features ratchet and ball stop
- Available in a double-cable “Y” design to ground two places at once

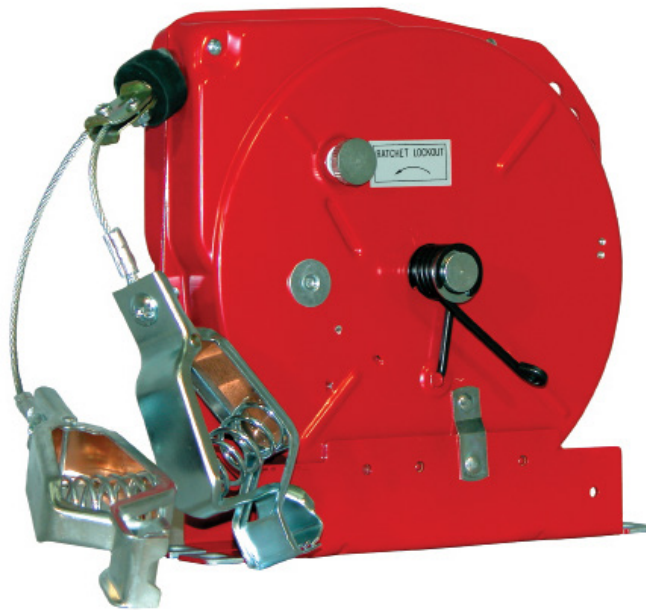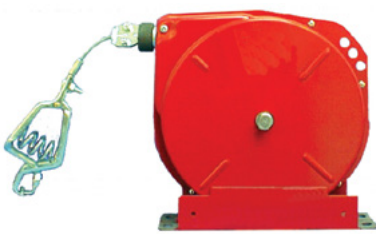

PART NUMBER	DESCRIPTION
CDED20B1	Reel Electric Discharge 20 ft. BARE CBL
CDED20C1	Reel Electric Discharge 20 ft. ORG CBL
CDED50B1	Reel Electric Discharge 50 ft. Bare CBL
CDED50C1	Reel Electric Discharge 50 ft. ORG CBL
CSDS25B1	Reel Static Discharge 25 ft. BARE CBL
CSDS25C1	Reel Static Discharge 25 ft. ORG CBL
CSDS50B1	Reel Static Discharge 50 ft. BARE CBL
CSDS50C1	Reel Static Discharge 50 ft. ORG CBL
CSDS50Y2	Reel Static Discharge 50 ft. Y-Bridle

LEGRAND PART NUMBERING SYSTEM DISCHARGE REELS

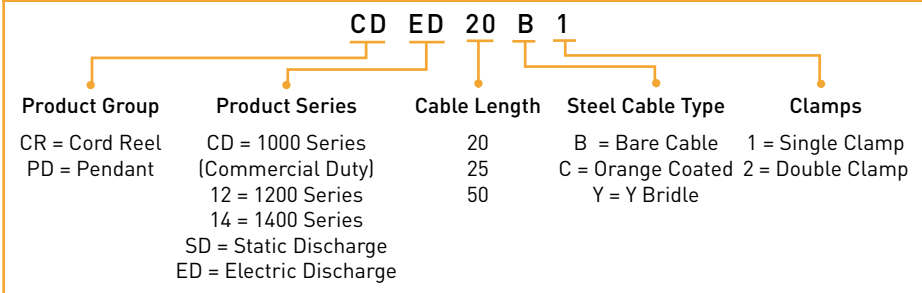



©2018 Legrand All Rights Reserved BR1963 07/18

designed to be better.™



Electrical Wiring Systems

60 Woodlawn Street
West Hartford, CT 06110
1.877.BY.LEGRAND (295.3472)
www.legrand.us

Canada
1.800.723.5175; 905.738.9195
www.legrand.ca

Costa Rica
+506.298.56.04; +506.239.71.13
www.legrand.cr

