



LED B11

3.3B11/PER/927-922/CL/G/E26/WGX1FB T20

Philips LED B11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.

Product data

| General Information | |
|------------------------|------------------------------------|
| Base | E26 [Single Contact Medium Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 15000 h |
| Switching Cycle | 20000X |
| Technical Type | 3.3-40W |

| Light Technical | |
|---------------------------------------|-------------------------------|
| Color Code | 927-922 [CCT of 2700K-2200K] |
| Initial lumen (Nom) | 300 lm |
| Color Designation | Warm Glow(WG) |
| Correlated Color Temperature (Nom) | 2700-2200 K |
| Luminous Efficacy (rated) (Nom) | 90.00 lm/W |
| Color Consistency | <4 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |

| Operating and Electrical | |
|---------------------------------|-------|
| Power (Rated) (Nom) | 3.3 W |
| Lamp Current (Nom) | 35 mA |
| Wattage Equivalent | 40 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |

| | |
|--------------------|-------|
| Power Factor (Nom) | 0.75 |
| Voltage (Nom) | 120 V |

| Temperature | |
|----------------------|-------|
| T-Case Maximum (Nom) | 50 °C |


| Controls and Dimming | |
|----------------------|-----|
| Dimmable | Yes |

| Mechanical and Housing | |
|------------------------|-------|
| Bulb Finish | Clear |

| Product Data | |
|---------------------------------|--|
| XUCDM.COPY.Product.Title | 3.3B11/PER/927-922/CL/G/E26/WGX1FB T20 |
| EAN/UPC - Product | 046677549589 |
| Order code | 549584 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929002047204 |
| Net Weight (Piece) | 0.016 kg |

LED B11


Dimensional drawing




Candle B11 120V 4.5?-40W 300lm 2700-2200

| Product | D | C |
|--|-------|-------|
| 3.3B11/PER/927-922/CL/G/E26/WGX1FB T20 | 35 mm | 92 mm |


Photometric data



LEDbulb E12 E26 BA11 B11 927 CL-LDD



LEDbulb 3.3W E26 B11 927 CL

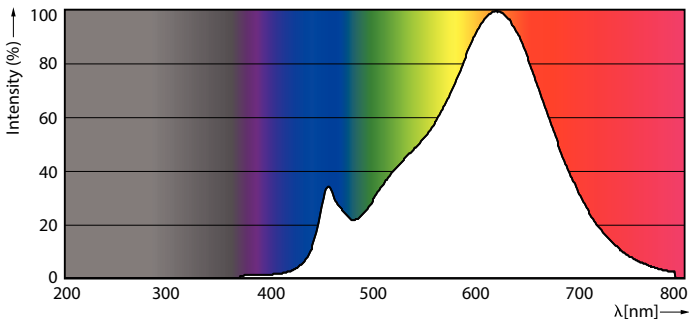


LEDbulb 927 CL-POC

LED B11

Lifetime



LEDbulb_15K LED

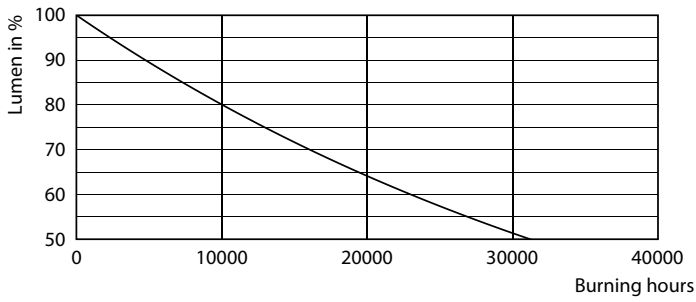

LEDbulb_15K LMP

